


Model	Dallas WX31NXT
Technology	.65" WXGA DMD DLP
Brightness	3100 lumens (standard) / 2200 lumens (economy)
Native Resolution	1280 x 800 (WXGA)
Supported Resolution	up to 1600 x 1200 (UXGA)
Brightness Uniformity	80%<
Projection Methods	Desktop front/rear, Ceiling front/rear
Optical Offset	125%
Colors	1.07 billion true color
Color System	NTSC / NTSC 4.43 / PAL (including PAL-M, N) / SECAM/PAL60
Color Wheel	6 Segment
Aspect Ratio	Native 16:10; Compatible 4:3, 16:9
Image Size	70 in to 100 in / 1.78 m to 2.54 m
Projection Distance	23.5 in ~ 28.7 in 87.2 in diag @ 25.75"
Throw Ratio	.35:1 *allow 3-5% variance on all projector throw ratios
Speaker	1 x 10W
Contrast Ratio	3000:1
Digital Zoom	2x zoom
Keystone Correction	Vertical +/- 15 degrees
Vertical Scan Rate	48 to 120 Hz
Horizontal Scan Rate	31 to 92 kHz
Lens Type	Fixed zoom / Manual focus
Lamp	280W UHP
Lamp Life	3000 (standard) / 4000 (economy)
Remote Control	Multi-function credit card style with battery
Noise Level	37db (standard) / 33db (economy)
Power Supply	Universal AC 100 - 240 V ~ 50 - 60 Hz
Power Consumption	345W±10% at 110VAC <.5W in standby mode
Safety Certifications	CE, FCC, UL
Computer Compatibility	VGA, SVGA, XGA, SXGA, WXGA, UXGA VESA standards; PC and Macintosh compatible
Video Compatibility	480i/p, 576i/p, 720p, 1080i
Video Compatibility (HDMI)	SDTV 480P, HDTV 720P, 1080i, 1080p
Inputs	VGA x 2, HDMI, S-Video, Composite, Audio RCA (L/R), 3.5mm audio x 2, Microphone
Outputs	Mini USB for service, VGA, 3.5mm audio DC 12V
Service and Network Control	RJ45, RS232 D-Sub 9pin
Weight	17.7 lbs / 8 KG
Dimensions (W x H x D)	14.06 in x 14.45 in x 5.32 in / 357 mm x 367 mm x 135 mm
Operating Conditions	41 ~ 104°F
Security	Kensington® lock port, anchor security bar
Standard Accessories	AC power cord, VGA cable, remote control with battery, user manual (CD)
Optional Accessories	Replacement remote, cables



BOXLIGHT's Dallas WX31NXT projector, an ultra short throw projector for when space is tight.

KEY FEATURES

- Multiple display modes
- Less than 0.5W power consumption in standby mode
- LAN control
- 3D capable
- 2 x digital zoom
- Microphone input
- Multiple wall color options
- Up to 100" diagonal
- Filter free design

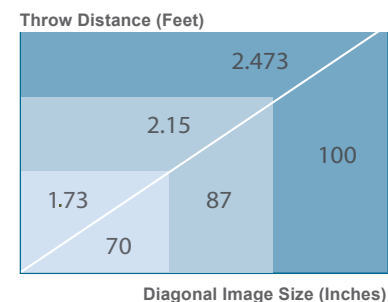

Award Winning Technical Support 24/7/365

BOXLIGHT products come with free lifetime technical support. Speak with a hands-on, in-house, ISF Certified® technician ready to service your projector should the need arise.