

MP65e

As Tough As The Elements

The MP65e is as durable as it is versatile, and is especially great in dusty environments, either indoors or outdoors.



- 4500 lumens
- Micro lens array
- Closed caption
- Side changing lamp and filter
- Auto filter alert
- Quick startup and shutdown
- Network management
- Optional harsh environment Hepa filtration
- Quick install features
 - Auto ceiling detection
 - Auto keystone correction
 - Auto brightness control

MP65e

Specifications



BRIGHTNESS

4500 Lumens (Standard)
3800 Lumens (Economy)

RESOLUTION

1024 x 768 XGA (Native)
1280 x 1024 SXGA (Supported)

DISPLAY TYPE

0.79" LCD MLA x 3 

CONTRAST RATIO

500 :1

ASPECT RATIO

4:3 Native
16:9 Compatible

THROW RATIO

1.5 ~ 1.8 (x screen width)

PROJECTION LENS

Manual Zoom & Focus

ZOOM RATIO

1.2:1

DIAGONAL IMAGE SIZE

40" - 300"
101.6cm - 762cm

THROW DISTANCE

4' - 30'
1.2m - 9.1m

KEystone

+/- 30° Vertical

LAMP

275 watt NSH

LAMP LIFE

2000 (Standard)
3000 (Economy)

INPUTS

DVI-I w/3.5 mm Audio
VGA w/3.5 mm Audio
S-Video
Component
Composite Video
Audio (3.5mm)
RCA R/L Audio

OUTPUTS

VGA w/ 3.5 mm Audio

PROJECTOR CONTROLS

USB
RS232 (DIN)
RS232 (9-pin)
RJ45 LAN Control

COMPATIBILITY

VGA, SVGA, XGA, SXGA, Mac

EDTV / SDTV / HDTV

480i/p, 525i/p, 576i/p, 625i/p,
720p, 1080i

FCC CERTIFICATION

FCC-B, UL, TUV-CB, c-UL, CB, CE,
CCC

VIDEO COMPATIBILITY

NTSC, NTSC 4.43, PAL B/G/H/I/M/N 60,
SECAM

AUDIO

1 x 8w Mono Speaker

DECIBEL RATING

33 dB (Standard)
30 dB (Economy)

H-SCAN FREQUENCY

15-107 kHz

V-REFRESH RATE

43-120 kHz

POWER SUPPLY

AC 100-240 Volts (50/60Hz)

POWER CONSUMPTION

430 Watts (Typical)

DIMENSIONS (WxDxH)

18.9" x 14.2" x 5.7"
48cm x 36.1cm x 14.5cm

WEIGHT

16.5 lbs
6.8 kg

WARRANTY

3 year parts & labor / 90 day lamp

Special features of the Seattle MP65e include:


Auto brightness – Detects ambient light and adjusts brightness, extending lamp life.

Dust/Smoke Filter – High-efficiency dust cabinet and air filter perfect for dust-torn environments.


Quick start and quick shut down – Short length of time when powering the projector on & off.

Network management – Manage/monitor your projector using a wired network.

Auto filter alert – Projector notifies you when the filters need to be changed.

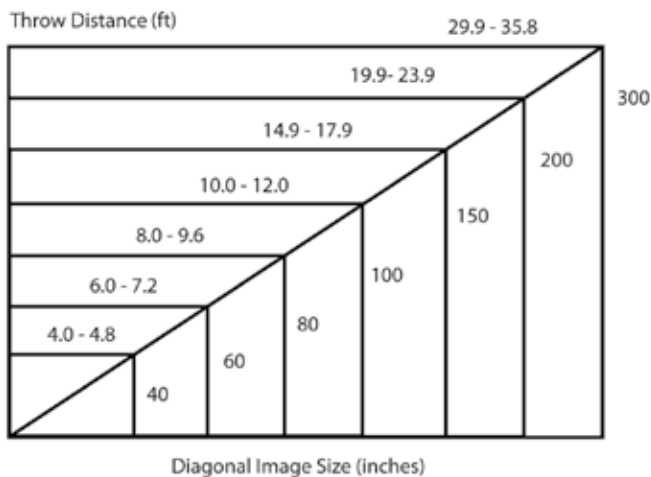

- (5) Speaker
- (11) Filter cover
The air filter is inside.
- (14) AC inlet
- (15) S-VIDEO port
- (16) AUDIO L/R port
- (17) VIDEO port
- (18) COMPUTER IN1 port
- (19) COMPUTER IN2 / DVI port
- (20) USB port
- (21) AUDIO 1 IN port
- (22) AUDIO 2 IN port
- (23) AUDIO OUT port
- (24) MONITOR OUT port
- (25) YPbPr port
- (26) L-AUDIO IN-R port
- (28) RS-232C port
- (29) LAN port

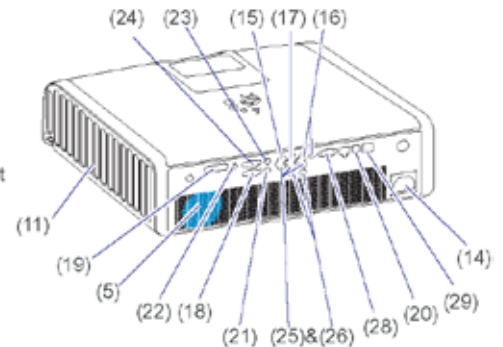

www.boxlight.com
360.464.2119