

# Pro5000sL

Jack of All Trades

**The Pro5000sL is a large room necessity!**  
3 optional lenses ranging from a 1.8:1 to a 4.1:1 throw ratio, this projector works for you. With a generous input panel and easy install features, you will wonder where it has been all your life!



\*Pro5000SL shown with standard lens

- 3 lens options from 1.8 to 4.1:1 throw ratios
- Email monitoring
- Web access via network management software
- Quick install features
  - Auto ceiling detection
  - Auto keystone correction
  - Auto brightness control



# Pro5000sL

## Specifications

\*No Lens Included



### BRIGHTNESS

5000 Lumens (Standard)  
4000 Lumens (Economy)

### RESOLUTION

1024x768 XGA (Native)  
1280x1024 SXGA (Supported)

### DISPLAY TYPE

0.79" LCD MLA x 3 

### CONTRAST RATIO

500 :1

### ASPECT RATIO

4:3 Native  
16:9 Compatible

### THROW RATIO

1.8-2.3 Pro5000SL-911  
2.3-2.9 Pro5000SL-912  
3.1-4.1 Pro5000SL-913

### PROJECTION LENS

Manual Zoom & Focus

### ZOOM RATIO

1.27 Standard  
1.25 Medium  
1.26 Long

### DIAGONAL IMAGE SIZE

40" - 300"  
101.6cm - 762cm

### THROW DISTANCE

4' - 30'  
1.2m - 9.1m

### KEystone

+/- 30° Vertical

### LAMP

330 watt NSH

### LAMP LIFE

2000 (Standard)  
3000 (Economy)

### INPUTS

DVI-I w/3.5 mm Audio  
VGA w/3.5 mm Audio  
S-Video  
Component  
Composite Video  
Audio (3.5 mm)  
RCA R/L Audio

### OUTPUTS

VGA w/ 3.5mm Audio

### PROJECTOR CONTROLS

USB  
RS232 (9-pin)  
RJ45 (LAN Control)

### COMPATIBILITY

VGA, SVGA, XGA, SXGA, MAC

### EDTV / SDTV / HDTV

480i/p, 525i/p, 576i/p, 625i/p,  
720p, 1080i

### FCC CERTIFICATION

FCC-B, UL, TUV-CB, c-UL, CB, CE,  
CCC

### VIDEO COMPATIBILITY

NTSC, NTSC 4.43, PAL B/G/H/I/M/N 60,  
SECAM

### AUDIO

1 x 8w Mono Speaker

### DECIBEL RATING

40 dB (Standard)  
35 dB (Economy)

### H-SCAN FREQUENCY

15-107 kHz

### V-REFRESH RATE

43-120 kHz

### POWER SUPPLY

AC 100-240 Volts (50/60 Hz)

### POWER CONSUMPTION

430 Watts (Typical)

### DIMENSIONS (WxDxH)

18.9" x 14.2" x 5.7"  
48cm x 36.1cm x 14.5cm

### WEIGHT

15 lbs (with no lens)  
6.8 kg (with no lens)

### WARRANTY

3 year parts & labor / 90 day lamp

### Pro5000sL Product Highlights:

- 3 optional lenses from 1.8 to 4.1 throw ratio.
- Advanced LAN control including email monitoring and online web access and scheduling.
- Easy installation function, auto key stone, and auto ceiling mount detection.
- Long lasting Hepa filtration system with upgradable smoke control option.
- Auto brightness detection to extend lamp life and out put only what is needed.

### Choose from 3 lens options:




Standard Throw Lens  
1.8-2.3 throw ratio  
1.27 zoom



Medium Throw Lens  
2.3-2.9 throw ratio  
1.25 zoom




Long Throw Lens  
3.1-4.1 throw ratio  
1.26 zoom



Easy optional lens installation requires only 4 screws (included).

- (5) Speaker
- (11) Filter cover  
The air filter is inside.
- (14) AC inlet
- (15) S-VIDEO port
- (16) AUDIO L/R port
- (17) VIDEO port
- (18) COMPUTER IN1 port
- (19) COMPUTER IN2 / DVI port
- (20) USB port
- (21) AUDIO 1 IN port
- (22) AUDIO 2 IN port
- (23) AUDIO OUT port
- (24) MONITOR OUT port
- (25) YPbPr port
- &(26) L-AUDIO IN-R port
- (28) RS-232C port
- (29) LAN port

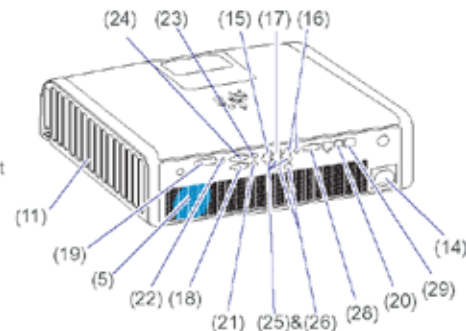

www.boxlight.com  
360.464.2119