

Phoenix X30

A Powerful Favorite

Delivering up to 3500 lumens of nice, bright light and sharp XGA resolution, it's no wonder the PhoenixX30 is one of our best selling projectors. Its consistent performance and easy-to-use functionality make it ideal for a wide variety of applications and audiences.



Phoenix X30



Specifications

BRIGHTNESS

3500 Lumens (Boost)
3000 Lumens (Standard)
2500 Lumens (Economy)

RESOLUTION

1024 x 768 XGA (Native)
1280 x 1024 SXGA (Supported)

DISPLAY TYPE

Texas Instruments 0.7" x 1, 12° DDR

CONTRAST RATIO

2100 :1

ASPECT RATIO

4:3 Native
16:9 Compatible

THROW RATIO

1.8 ~ 2.1 (x screen width)

PROJECTION LENS

Manual Zoom & Focus

ZOOM RATIO

1.15:1

DIAGONAL IMAGE SIZE

23" ~ 273"

THROW DISTANCE

3.2' - 32'

KEYSTONE

+/- 15° Vertical

LAMP

200 watt OSRAM VIP

LAMP LIFE

2000 Hours (Boost)
3000 Hours (Standard)
4000 Hours (Economy)

INPUTS

DVI-D (HDCP)
VGA (YPbPr)
S-Video
Composite Video

RCA audio (R/L)

Audio (3.5 mm)

OUTPUTS

Audio (3.5 mm)

VGA

PROJECTOR CONTROLS

USB

RS232 (9-Pin)

12 Volt Trigger

COMPATIBILITY

VGA, SVGA, XGA, SXGA, UXGA, MAC

EDTV / SDTV / HDTV

480i/p, 720p, 1080i

FCC CERTIFICATION

FCC-B, UL, TUV-CB, c-UL, CB, CE, CCC

VIDEO COMPATIBILITY

NTSC, NTSC 4.43, PAL B/G/H/I/M/N 60, SECAM

AUDIO

1 x 3w Mono Speaker

DECIBEL RATING

36dB (Boost) / 33dB (Standard) /
31dB (Economy)

H-REFRESH RATE

15—90 kHz

V-REFRESH RATE

50—85 kHz

POWER SUPPLY

AC 110 - 240 Volts (Auto Ranging)

POWER CONSUMPTION

290 Watts (Boost)

255 Watts (Standard)

230 Watts (Economy)

DIMENSIONS (WxDxH)

12" x 9.6" x 3.4"

WEIGHT

7.3 lbs

WARRANTY

3 Year Parts & Labor / 90 Day Lamp

Special features of the Phoenix X30 include:

Three lamp modes—

Change your lamp output for varying light conditions and save on lamp life.

Password security—

Protect use from multiple users or theft.



Fan speed options—

Enables better control of the projector's temperature and cooling process.

Top Changing Lamp—When ceiling mounted you can change the projector's lamp with ease.

Custom Splash Screen—

Customize the start-up screen on the projector.

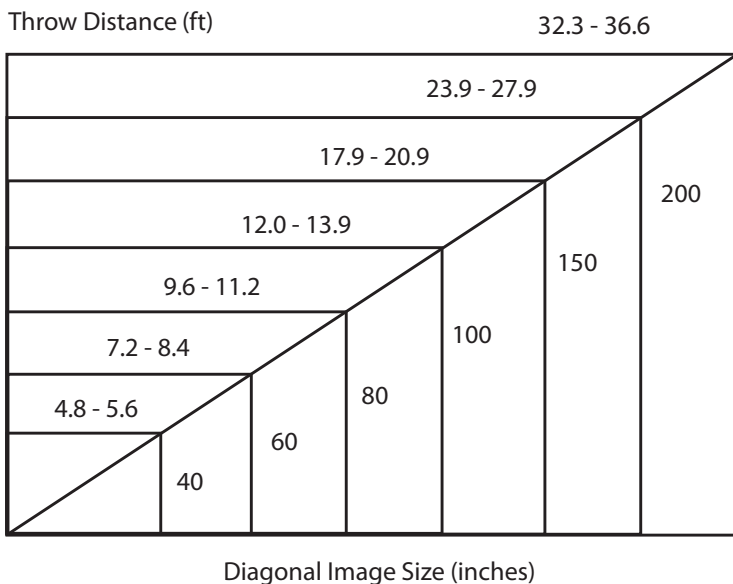

ITEM	Label	DESCRIPTION
1.	Rear IR receiver	Receiver for IR signal from remote control
2.	DVI-D	Connect the computer cable from a computer (Optional)
3.	VGA IN	Connect a VGA cable (supplied) from a computer
4.	VGA OUT	Connect to a monitor
5.	S-video	Connect the composite or S-video cable (not supplied) from a video device
6.	Video	Connect a composite video cable (not supplied) from a video device.
7.	Audio in-R	Connect the audio cable (not supplied) from an audio input device.
8.	Audio in-L	Connect the audio cable (not supplied) from an audio input device.
9.	Audio-in	Connect an audio cable (not supplied) from the computer's audio-out connector.
10.	Audio-out	Audio loop-thru
11.	USB	Connect the USB cable (supplied) from a computer
12.	12V Connector	Connect the 12V power outlet (Optional)
13.	RS-232	Installation control (Optional)
14.	Power switch	Turns the power on and off
15.	Power	Connect the supplied power cord
16.	Security Lock	Secure to permanent object with a Kensington® Lock system