

ProjectoWrite3 X25NU

Specifications


Model	ProjectoWrite3 X25NU
Technology	.63" 3LCD
Brightness	2500 Lumens
Native Resolution	1024 x 768 (XGA)
Supported Resolution	1600 x 1200 (UXGA)
Colors	16.7 million
Brightness Uniformity	80%
Projection Methods	Desktop front/rear; Ceiling front/rear
Contrast Ratio	600:1
Aspect Ratio	Native 4:3, Compatible 16:9 and 16:10
Image Size	49" to 100" / 124.5cm to 264cm
Projection Distance	2' to 4.2' / 0.61m to 1.28m
Lens Shift	N/A
Keystone Correction	Vertical +/- 30°
Horizontal Scan Rate	31 to 92 kHz
Vertical Scan Rate	48 to 120 Hz
Audio Output	1 x 8W mono
Lamp	210W UHP
Lamp Life	3000/5000 (standard/economy)
Optical Offset	120%
Throw Ratio	0.63:1
Remote Control	Full function IR remote with laser pointer
Noise Level	36dB (standard) / 33dB (economy)
Power Supply	Universal AC Input 100-240V at 50-60 Hz
Power Consumption	310W 1W in Standby mode
Computer Compatibility	UXGA, SXGA+, SXGA, XGA, SVGA, VGA Resized; VESA Standards; PC and Macintosh Compatible. USB 2.0 or greater required
Video Compatibility	EDTV (480p), HDTV (576i/p, 720p, 1080i), NTSC/NTSC 4.43, PAL B/G/H/I/M/N 60, SECAM
Connectivity	VGA x 2, HDMI, Composite video with 2 RCA (R/L) audio-in, Component video, S-Video, Audio 3.5mm in x 2, LAN, RS232, USB port for interactive function, VGA and 3.5mm outputs
Service and Network Control	RS232, RJ45, and USB for mouse control
Weight	9 lbs / 4.08 kg
Dimensions (W x H x D)	14.2" x 5.2" x 13.7" / 36.1cm x 13.2cm x 34.8cm
Operating Temperature	41° ~ 95°F, Humidity 20% to 80%, non-condensing
Standard Accessories	AC power cord, VGA cable, USB cable, Remote Control with batteries, User manual (cd), LightPen3 software, Interactive wand and pressure sensitive Lightpen, carry case for wand and pen
Optional Accessories	Replacement lamp, replacement remote, ALLINONE ceiling mount, USB Booster
Safety Certifications	FCC-B, UL, CB, CE, CCC, ROHS, REACH
Safety	Kensington® Lock Port, Keypad lock, Anchor security bar



Key Features


- Ultra short throw 0.63:1
- 100% faster response (60 frames per second)
- Accurate within 3 pixels
- System on Chip technology
- HID (Human Interface Device) technology
- Annotate over full motion video
- Compatible with any mouse application on your computer
- Save your drawings/images/edits on your PC for later viewing
- Plug and play
- Portable, retrofitable
- Ships with both a telescoping wand and pressure sensitive pen for interaction
- Side changing lamp and filter
- Advanced anti-theft features, Kensington lock, keypad lock, and security anchor bar
- Five auto features (Auto Search, Auto Sync, Auto Ceiling, Auto Keystone and Auto Filter Alert)
- Seven display modes (Natural, Cinema, Daylight, Greenboard, Whiteboard, Blackboard and User)
- Built-in 8W mono speaker
- Logo capture
- Image freeze function
- Digital zoom adjustment up to 4x
- Built in Network Control software via RJ45 (LAN) connection
- Multi language OSD (On-Screen Display)
- Closed caption
- Interactive software package included

Throw Distance (ft)

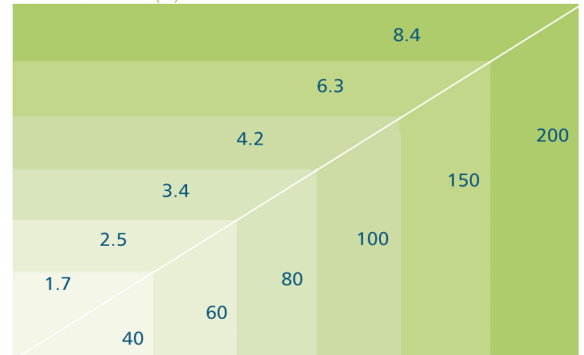

Diagonal Image Size (inches)

Note: allow 3-5% variance on all projector throw ratios

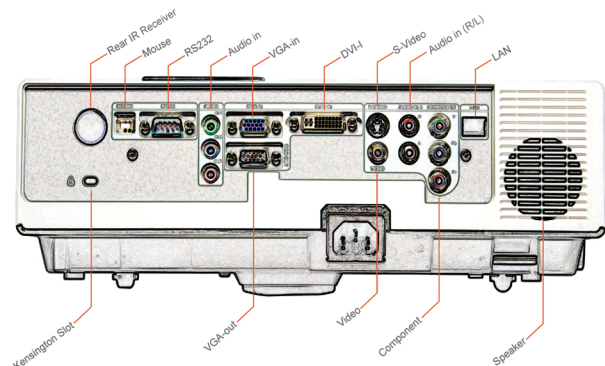

Preliminary



Outstanding Technical Support 24/7/365

And, of course, all BOXLIGHT products all come with free lifetime technical support. Speak with a hands-on, in-house, ISF Certified® technician ready to service your projector should the need arise.

© 2011 BOXLIGHT, Inc. Specifications subject to change without notice.
Helps meet ADA Section 508 compliance
BOXLIGHT NE 151 Highway 300, Suite A PO Box 2609 Belfair, WA 98528



360.464.2119
www.BOXLIGHT.com