


SEATTLE WX25N Specifications

Model	SEATTLE WX25N
Technology	.59" 3LCD 
Brightness	2500 Lumen [Standard] 1650 [economy mode]
Native Resolution	1280 x 800 (WXGA)
Supported Resolution	up to 1600 x 1200 (UXGA)
Brightness Uniformity	80%
Projection Methods	Desktop front/rear, Ceiling front/rear
Colors	16.7 million true color
Contrast Ratio	600:1
Aspect Ratio	Native 16:10; Compatible 4:3 and 16:9
Image Size	40"–300"
Projection Distance	5' to 30'
Lens Shift	N/A
Throw Ratio	1.45~1.73 (x screen width)
Zoom Ration	1.2:1
Digital Zoom	4x zoom with Pan function
Keystone Correction	Vertical +/- 30 degrees
Horizontal Scan Rate	31 to 92 kHz
Vertical Scan Rate	48 to 120 Hz
Audio Output	1 x 8W mono
Lamp	200W
Lamp Life	3000/4000 (standard/economy)
Remote Control	Full function IR remote with laser pointer
Noise Level	>33dB eco mode
Power Supply	Universal AC Input 100–240Vat 50–60Hz
Power Consumption	285W <2.6W standby mode
Safety Certifications	FCC-B, UL, cUL,TUB, CD, CE, CCC
Computer Compatibility	UXGA, SXGA+, SXGA, XGA, SVGA, VGA Resized; VESA Standards; PC and Macintosh Compatible
Video Compatibility	EDTV (480p), HDTV (576i/p, 720p, 1080i), NTSC/NTSC 4.43, PAL B/G/H/I/M/N 60, SECAM
Connectivity	VGA, DVI-I, Composite Video with 2 RCA (R/L) audio-in, Component Video, S-video, Audio 3.5mm-in x 2, LAN, RS232, USB port for mouse control, VGA and 3.5 mm outputs
Service and Network Control	RS232, RJ45
Weight	7.3 lbs
Dimensions (W x H x D)	12.8" x 10.24" x 3.8"
Operating Temperature	N/A
Security	Kensington® Lock Port, Keypad lock, Anchor security bar
Standard Accessories	AC power cord, VGA cable, USB cable, Remote Control with batteries, User manual (cd), Carrying Case
Optional Accessories	Replacement lamp, replacement remote, ALLINONE ceiling mount, USB-Booster, short throw lens attachment




Key Features

- Designed for tough environment
- Side changing lamp
- Side changing filter
- Quick off/on
- Advanced Anti-theft features, Kensington® lock, Keypad lock, Security Anchor bar
- Five auto features (Auto Search, Auto Sync, Auto Ceiling, Auto Keystone and Auto Filter Alert)
- Seven display modes (Natural, Cinema, Daylight, Green board, White Board, Black,Board and User)
- Built-in 8W Mono Speaker
- Logo capture
- Image freeze function
- Digital zoom adjustment up 4x
- Built in Network Control software via RJ45 (LAN) connection
- Multi Language OSD (On-Screen Display)
- Closed Caption

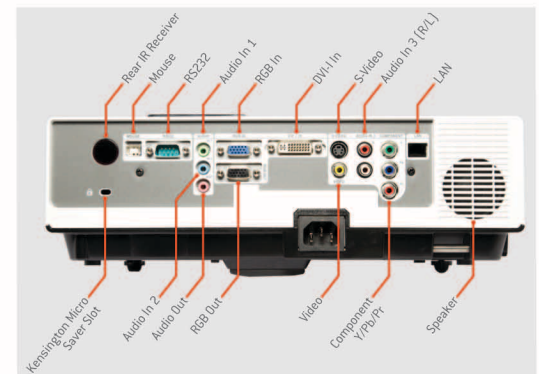

Throw Distance (ft)

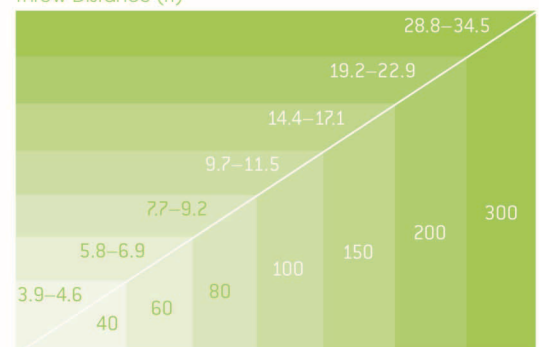

Diagonal Image Size (inches)

Outstanding Technical Support 24/7/365

And, of course, all **BOXLIGHT** products all come with free lifetime technical support. Speak with a hands-on, in-house, ISF Certified® technician ready to service your projector should the need arise.

© 2010 BOXLIGHT, Inc. Specifications subject to change without notice.
Helps meet ADA Section 508 compliance
BOXLIGHT NE 151 Highway 300, Suite A PO Box 2609 Belfair, WA 98528



360.464.2119
www.BOXLIGHT.com