


# Installation Instructions

## Wall Brackets by Draper

### Caution

- ① Do not overtighten bolts/screws: Overtightening could damage brackets.
- ② For added safety, crimp "S" hooks so the screen cannot come off.
- ③ Assembly hardware is included; fasteners for attaching to wall are not included.
- ④ Maximum load for wall brackets is 75 lbs; installer is responsible for ensuring the mounting surface is adequate.
- ⑤ Installer is responsible for providing hardware appropriate to mounting surface and size and weight of screen.

6" non-adjustable  
Extension Brackets



- ① Attach eye bolts to brackets. First, fully seat the flanged nut onto the eye bolt. Then, place a nut in the countersunk hole in the bracket, and screw in the eye bolt.

**Please Note: Make sure flanged nut is fully tightened against the wall bracket, but be careful not to overtighten.**

- ② Measure distance between mounting holes on the screen, and mark the bracket locations on the wall.
- ③ Mount brackets to wall.

**Please Note: It is the responsibility of the installer to ensure that appropriate hardware is used. The maximum diameter fastener that should be used to attach to the wall is  $\frac{5}{16}$ ".**

- ④ Suspend the screen from the eye bolts with "S" hooks.
- ⑤ Crimp both ends of the "S" hooks so the screen cannot come off.

**For dimensional drawings and hardware/parts lists, please see reverse side.**


If you encounter any difficulty installing or servicing your Wall Brackets by Draper, all your dealer or Draper, Inc., Spiceland, Indiana, (765) 987-7999, or fax (765) 987-7142.

# DRAPER®

411 S. Pearl St., Spiceland, IN 47385 USA ■ 765-987-7999  
www.draperinc.com ■ fax 765-987-7142

Copyright ©2008 Draper Inc. Form WallBrackets\_Inst08 Printed in U.S.A.

10" or 14"  
non-adjustable  
Extension Brackets

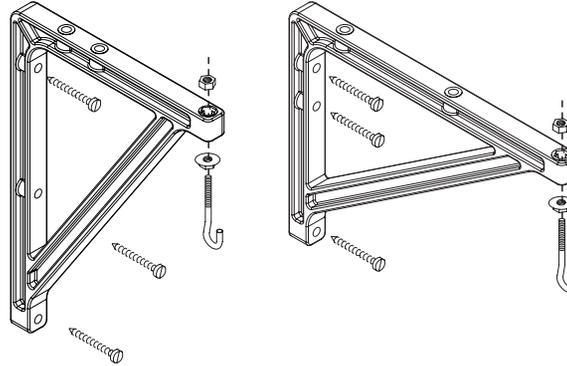

- ① Attach eye bolts to brackets. First, fully seat the flanged nut onto the eye bolt. Then, place a nut in the countersunk hole in the bracket, and screw in the eye bolt.

**Please Note: Make sure flanged nut is fully tightened against the wall bracket, but be careful not to overtighten.**


- ② Measure distance between mounting holes on the screen, and mark the bracket locations on the wall.
- ③ Mount brackets to wall. For 10" extension from wall, install with the long end against the wall. For 14" extension from wall, install with short end against the wall.

**Please Note: It is the responsibility of the installer to ensure that appropriate hardware is used. The maximum diameter fastener that should be used to attach to the wall is  $\frac{5}{16}$ ".**

- ④ Suspend the screen from the eye bolts with "S" hooks.
- ⑤ Crimp both ends of the "S" hooks so the screen cannot come off.

**For dimensional drawings and hardware/parts lists, please see reverse side.**

18¼"-24" adjustable or  
20" non-adjustable  
Extension Brackets

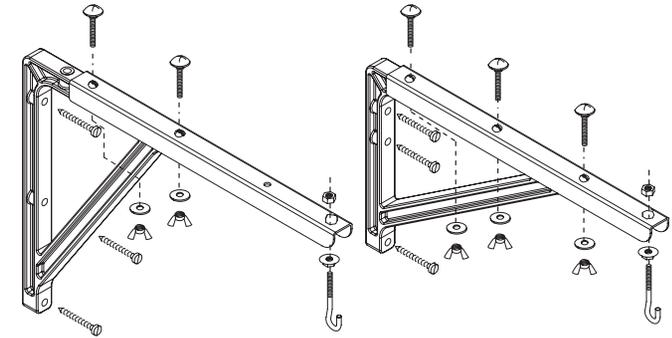

- ① Attach Extension arms to wall brackets. For 20" extension from wall, attach extension arms to short ends of brackets. For 18¼"-24" extension from wall, attach extension arms to short ends of brackets.
- ② Attach eye bolts to brackets. First, fully seat the flanged nut onto the eye bolt. Then, place a nut in the countersunk hole in the bracket, and screw in the eye bolt.

**Please Note: Make sure flanged nut is fully tightened against the wall bracket, but be careful not to overtighten.**


- ③ Measure distance between mounting holes on the screen, and mark the bracket locations on the wall.
- ④ Mount brackets to wall.

**Please Note: It is the responsibility of the installer to ensure that appropriate hardware is used. The maximum diameter fastener that should be used to attach to the wall is  $\frac{5}{16}$ ".**

- ⑤ Suspend the screen from the eye bolts with "S" hooks.
- ⑥ Crimp both ends of the "S" hooks so the screen cannot come off.

**For dimensional drawings and hardware/parts lists, please see reverse side.**

## Wall Brackets—Dimensions

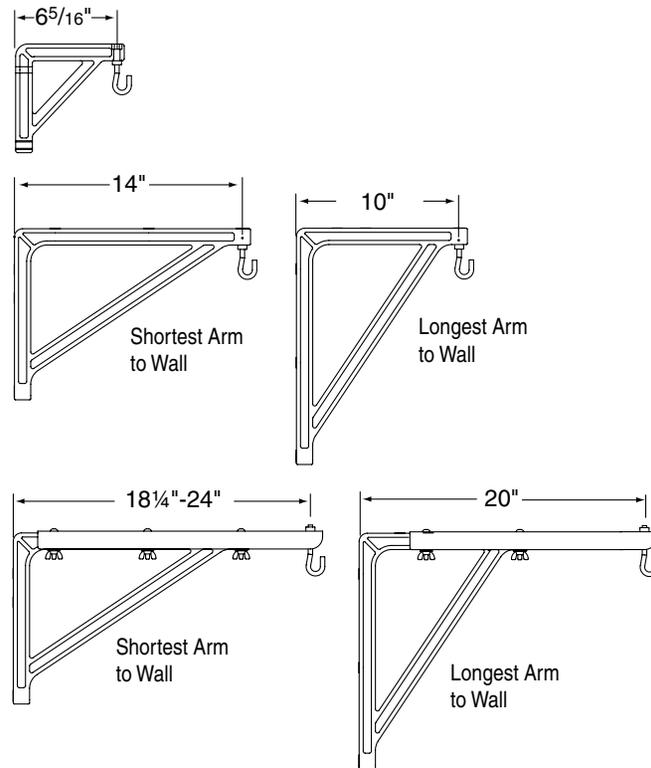

### Hardware

**Please Note:** It is the responsibility of the installer to ensure that appropriate hardware is used. The maximum diameter fastener that should be used to attach to the wall is  $\frac{5}{16}$ ".

## Hardware Kit for 6" Non-adjustable and 10" & 14" Non-adjustable Extension Brackets

- 5/16"-18 Nut-2 
- 5/16"-18 Flanged Nut-2 
- Eye bolt-2 
- "S" Hook-2 

**Please Note:** When using "S" hooks to suspend screen from wall brackets, be sure to crimp both ends of the "S" hooks for additional safety.

## Hardware Kit for 18 1/4"-24" Adjustable and 20" Non-adjustable Extension Brackets

- 1/4"-20 x 1 1/4" Carriage Bolt-4 
- 1/4" Washer-4 
- 1/4"-20 Wing Nut-4 
- 5/16"-18 Nut-2 
- 5/16"-18 Flanged Nut-2 
- Eye bolt-2 
- "S" Hook-2 