


V-4240 COMMERCIAL MIXER AMPLIFIER



- 240 Watts output power at 70 volts
- Removable front panel knobs with security caps
- Front panel 3.5mm Aux input with USB charger
- Studio quality microphone pre-amp
- Switchable 24V phantom power
- Switchable 100Hz high pass filter
- Switchable priority override with sens adjustment
- Removable terminal block connectors
- Telephone input with priority & level adjustment
- Remote muting contacts
- Balanced bridging circuit for room combining
- Expandable to 10 inputs (4mic 6 line)
- Add accessories on a single cat5e wire
- Remote volume control (via V-RVC)
- Designed and engineered in North America
- Three year parts and labor warranty

V-Series Amplifier Accessories

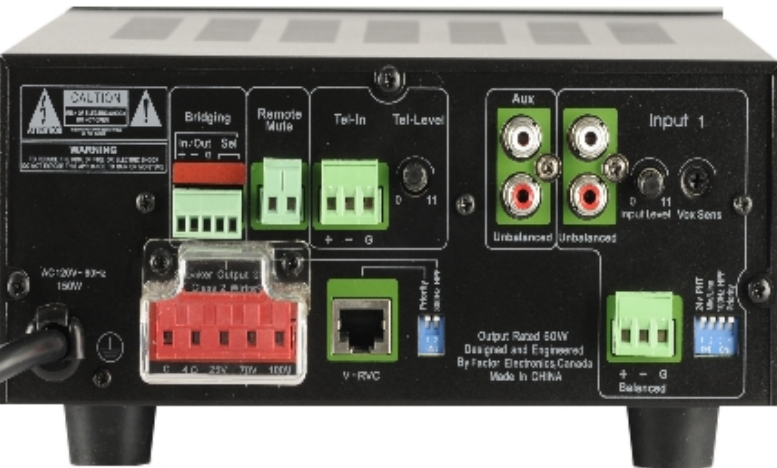

VT-1 or VT-4 Tuners



AM/FM Tuners with RBDS

V-RVC



In-wall mic/line pre-amp

X-Music



In-wall iPod MP3 dock

V-RMC



In-wall room combiner

V-RK2.5



Rack kit for 1 or 2 amps

Specifications: **V-430** **V-460** **V-4120** **V-4240**

| | | | | |
|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| Output Power (RMS) | 30 watts | 60 watts | 120 watts | 240 watts |
| Frequency Response | 50Hz- 20kHz | 50Hz- 20kHz | 50Hz-20kHz | 50Hz- 20kHz |
| Total Harmonic Distortion | <0.5% at rated power | <0.5% at rated power | <0.5% at rated power | <0.5% at rated power |
| Signal To Noise Ratio, Mic | 67dB | 69dB | 70dB | 70dB |
| Signal to Noise Ratio, Line | 75dB | 77dB | 79dB | 79dB |
| Signal to Noise Ratio, Tel | 76dB | 78dB | 79dB | 79dB |
| Max Residual Noise Level | 5mV | 3.6mV | 4.2mV | 4.2mV |
| Inputs, Microphone | 1 expand to 4 | 1 expand to 4 | 1 expand to 4 | 1 expand to 4 |
| Inputs, Line Level | 3 expand to 6 | 3 expand to 6 | 3 expand to 6 | 3 expand to 6 |
| Inputs, Telephone | 1 | 1 | 1 | 1 |
| Input, V-RVC | 1 | 1 | 1 | 1 |
| Speaker Outputs | 4ohm/25/70/100V | 4ohm/25/70/100V | 70V | 70V |
| Bridging In/Out | 1 Balanced | 1 Balanced | 1 Balanced | 1 Balanced |
| Remote Master Volume | Via V-RVC | Via V-RVC | Via V-RVC | Via V-RVC |
| Power Requirements, AC | AC120V/60Hz | AC120V/60Hz | AC120V/60Hz | AC120V/60Hz |
| Power Consumption, AC | 90W | 150W | 150W | 250W |
| Dimensions | 8.5"W x 4"H x 11.25"D | 8.5"W x 4"H x 11.25"D | 8.5"W x 4"H x 11.25"D | 8.5"W x 4"H x 11.25"D |
| Shipping Weight | 10.25lb – 4.7 kg | 12.2lb - 5.5 kg | 7lb - 3.18kg | 7.5lb – 3.4kg |
| Optional Accessories 1 | Rack Kit V-RK2.5 | Rack Kit V-RK2.5 | Rack Kit V-RK2.5 | Rack Kit V-RK2.5 |
| Optional Accessories 2 | V-RVC mic/line preamp | V-RVC mic/line preamp | V-RVC mic/line preamp | V-RVC mic/line preamp |
| Optional Accessories 3 | V-RMC In-wall room combiner | V-RMC In-wall room combiner | V-RMC In-wall room combiner | V-RMC In-wall room combiner |
| Optional Accessories 4 | X-Music In-wall iPod dock | X-Music In-wall iPod dock | X-Music In-wall iPod dock | X-Music In-wall iPod dock |

Specifications are subject to change without notice