




Operating Instructions

MicroScreen Tabletop Projection Screen by Draper


- ① Open all four leg supports 90 degrees to casing. Leg supports snap into correct position.

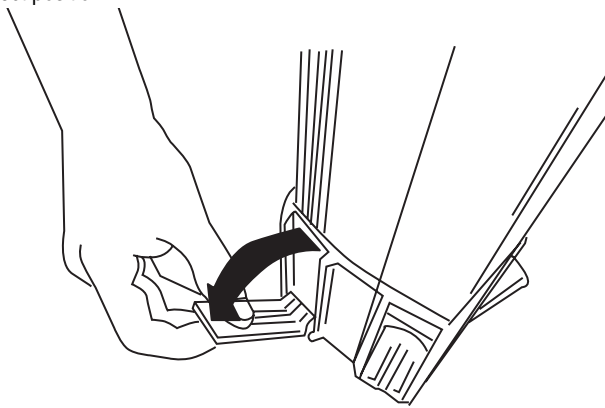

- ② Place closed unit with carry handle on left side (from audience perspective). Depress two buttons on front and back of housing (clearly marked) with thumb and index finger. Open screen slowly to desired width.

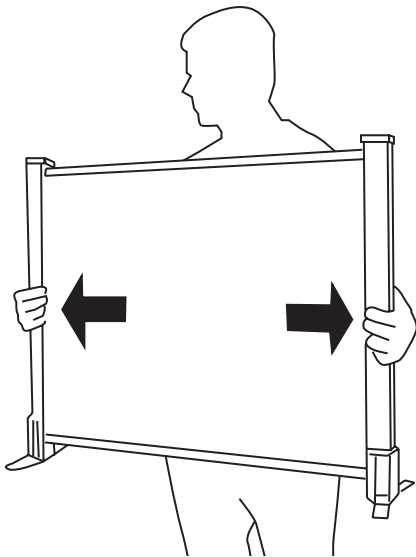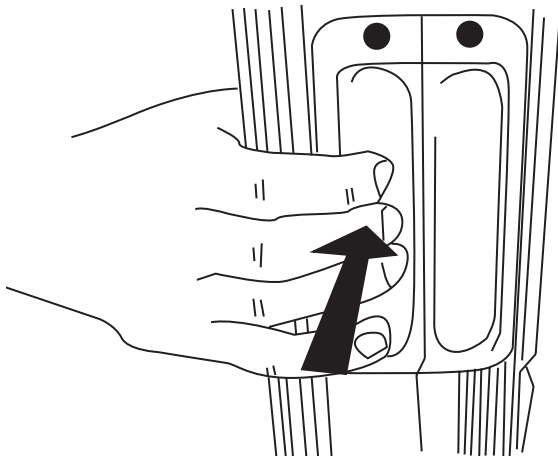


- ③ Place on flat and stable table and position for data projection viewing.
 ④ To close, repeat step two. Casing will automatically snap closed. Take care to close gently.

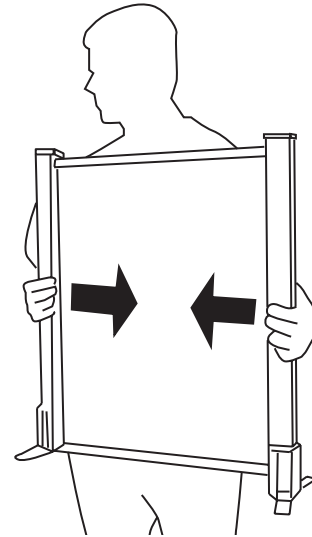

Note: Do not touch the screen surface. Handle the MicroScreen only by the case sides or handle.

- ⑤ To close leg supports, squeeze legs together at base of housing. Fold up to closed position. Legs will automatically snap into closed position.

Caution: Take care not to pinch fingers between sides when closing.

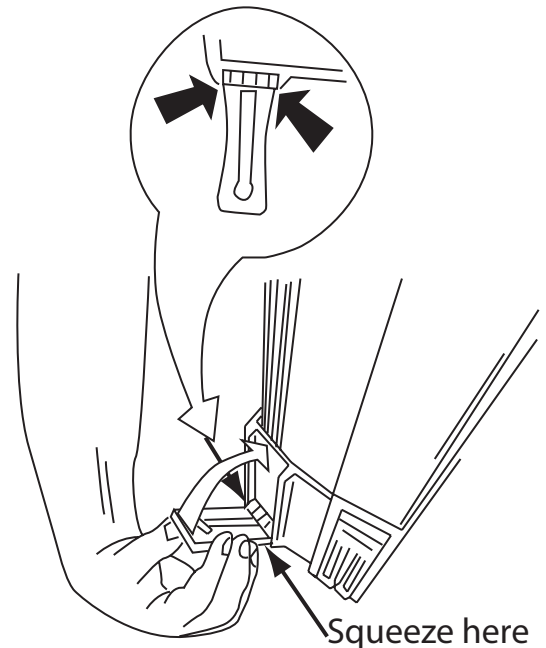

- ⑥ Place unit into protective storage bag.

Note: Do not allow screen surface to be exposed to direct sunlight, as it could fade matt white viewing surface. For presentation, place opened unit away from door drafts and fan air movement.

DRAPER®

411 S. Pearl St., Spiceland, IN 47385 USA ■ 765-987-7999
 www.draperinc.com ■ fax 765-987-7142

Copyright © 2008 Draper Inc. Form MicroScreen_Inst08-R Made in China

Dimensions

Diagonal (4:3 NTSC)	Overall Size (H x W)	Image Area (H x W)	Closed Dimensions (D x H x W)	Weight (lbs)
40"	28 ¹ / ₈ " x 36 ¹ / ₂ "	24" x 32"	3" x 3 ¹ / ₂ " x 28 ¹ / ₈ "	6
50"	34 ¹ / ₂ " x 44 ⁵ / ₈ "	30" x 40"	3" x 3 ¹ / ₂ " x 34 ¹ / ₂ "	6

If you encounter any difficulties installing or servicing your screen, call your dealer or Draper, Inc., Spiceland, Ind., (765) 987-7999, or fax (765) 987-7142.