


# Technical Data Sheet

## VIC-6 Video Interface Control By Draper

- USES:** The VIC-6 replaces the standard single-station control switch for all screens or shades where a 6 volt trigger circuit is turned on to lower the product, and turned off to raise the product.
- COMPATIBILITY:** The VIC-6 is intended as the sole control, and cannot be used with any other control, except the optional override switch (VIC-OS).  
Please Note: If VIC-6 is built-in, VIC-OS cannot be used.
- CONTACTS:** Single-Pole, Double-Throw (Common, Normally Closed, Normally Open).
- RATING:** Contacts: 240 VAC, 7 A; 120 VAC, 7.5 A; 30 VDC, 7 A. UL, CSA recognized.  
Coil: 6 VDC  
Requires 100 MilliAmps input
- DESCRIPTION:** A relay with COM/NC/NO contacts, and a 6V coil, housed in a metal box. Box measures 3" x 4" x 5" and has three pigtails leading from it:  
a. A 7½ ft. black cord with 3-pronged plug for constant 115V AC.  
b. Two 22" wire leads (orange & brown) for switched 6V DC.  
c. Four 6" wire leads for the motor: blue, red, white, green (up, down, neut., grnd).

### ILLUSTRATION:

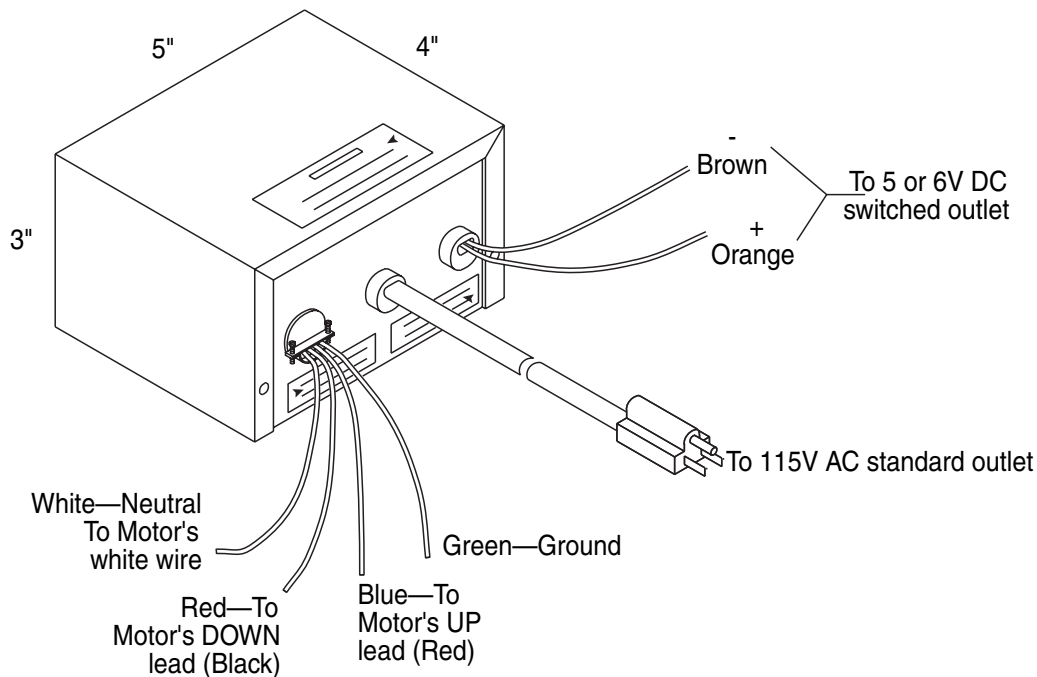

# DRAPER

411 S. Pearl St., Spiceland, IN 47385 USA ■ 765-987-7999  
www.draperinc.com ■ fax 765-987-7142