

MPWX70E



Specifications

BRIGHTNESS

4200 Lumens (Standard)
3200 Lumens (Economy)

RESOLUTION

1280 x800 WXGA (Native)
1280X1024 SXGA (Supported)

DISPLAY TYPE

0.74" LCD MLA x 3

CONTRAST RATIO

500 :1

ASPECT RATIO

16:10 Native
4:3 Compatible

THROW RATIO

1.5 ~ 1.8 (x screen width)

PROJECTION LENS

Manual Zoom / Focus

ZOOM RATIO

1.2:1

DIAGONAL IMAGE SIZE

40" - 300" / 101.6cm - 762cm

THROW DISTANCE

40" - 300" / 101.6cm - 762cm

KEystone

+/- 30° Vertical

LAMP

330 watt NSH

LAMP LIFE

2000 (Standard)
3000 (Economy)

INPUTS

DVI-I w/ 3.5mm Audio
VGA w/ 3.5mm Audio
S-Video

Component

Composite Video

Audio (3.5mm)

RCA R/L Audio

OUTPUTS

VGA w/ 3.5mm Audio

PROJECTOR CONTROLS

USB
RS232 (DIN)
RS232 (9-pin)
RJ45 LAN Control

COMPATIBILITY

VGA, SVGA, XGA, SXGA, Mac
EDTV / SDTV / HDTV
480i/p, 525i/p, 576i/p, 625i/p,
720p, 1080i

FCC CERTIFICATION

FCC-B, UL, TUV-CB, c-UL, CB, CE, CCC

VIDEO COMPATIBILITY

NTSC, NTSC 4.43, PAL B/G/H/I/M/N 60,
SECAM

AUDIO

1 x 8w Mono Speaker

DECIBEL RATING

40dB (Standard)
35dB (Economy)

H-SCAN FREQUENCY

31~92 kHz

V-REFRESH RATE

43-120 kHz

POWER SUPPLY

AC 110-240 Volts (50/60Hz)

POWER CONSUMPTION

430W (Typical)

DIMENSIONS (WxDxH)

18.9" x 14.2" x 5.7" Inches
48cm x 36.1cm x 14.5cm

WEIGHT

18.5 Lbs (8.4 Kg)

WARRANTY

3 year parts & labor / 90 day lamp

Special features of the MPWX70E include:


Auto brightness - Detects ambient light and adjusts brightness, extending lamp life.

Dust/Smoke filter - High-efficiency dust cabinet and air filter perfect for dust-torn environments.


Quick start and quick shut down - Short length of time when powering the projector on & off.

Network management - Manage/monitor your projector using a wired network.

Auto filter alert - Projector notifies you when the filters need to be changed.

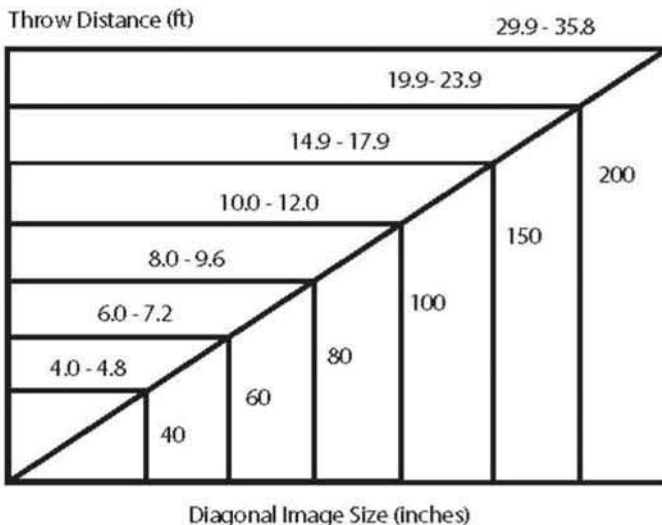

- (5) Speaker
- (11) Filter cover
The air filter is inside.
- (14) AC inlet
- (15) S-VIDEO port
- (16) AUDIO L/R port
- (17) VIDEO port
- (18) COMPUTER IN1 port
- (19) COMPUTER IN2 / DVI port
- (20) USB port
- (21) AUDIO 1 IN port
- (22) AUDIO 2 IN port
- (23) AUDIO OUT port
- (24) MONITOR OUT port
- (25) YPbPr port
- (26) L-AUDIO IN-R port
- (28) RS-232C port
- (29) LAN port (Optional)

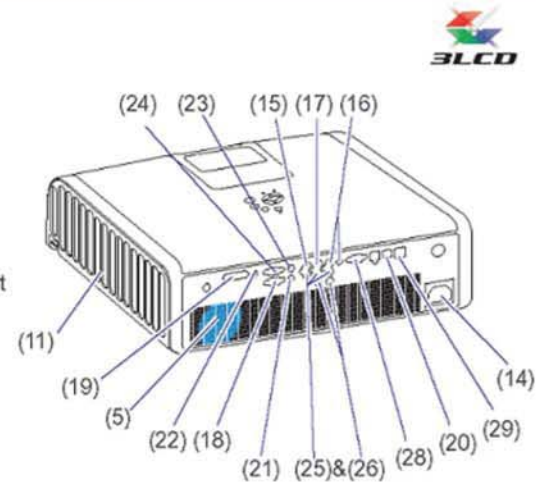

www.boxlight.com
360.464.2119