

8101H

ImagePro 8101H Ultra Short Throw LCD Projector




CEILING MOUNT

The ImagePro 8101H features a short throw distance to allow placement where user shadow does not affect image viewing

FEATURES

- 2500 Lumens Brightness
- XGA Resolution
- Large filter with side access
- Ultra short 4 to 31 inch throw
- Monitor Loopthrough
- Built-in Anti-theft security
- Dynamic room-filling sound from 7-watt speaker
- No shadow/No glare
- Hybrid 2000 hour filter

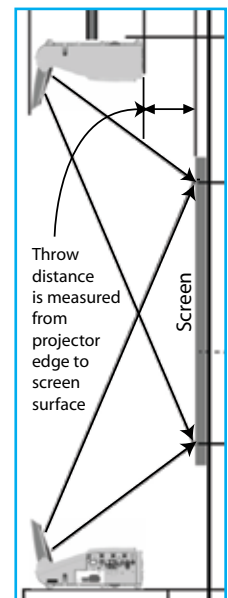

FLOOR MOUNT

THE ALL NEW

DUKANE

Education. Presentation. Inspiration.

www.dukcorp.com/av




Convey by Dukane delivers control of classroom audio visual assets in sync with our Student Response System.

Experience tomorrow's classroom today with Convey.

Visit www.convaclassrooms.com. Call Dukane: 866.280.4298


**IMAGEPRO 8101H
ULTRA SHORT THROW
LCD PROJECTOR**

**Back Panel
Connections**

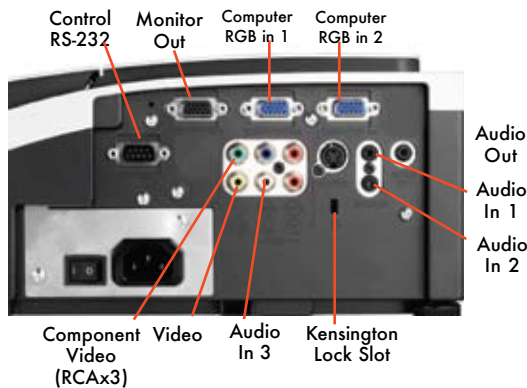

FEATURES

- Ultra Short (4 to 31 inch) throw distance
- XGA (1024 x 768) resolution
- 2500 ANSI lumens of brightness
- Large hybrid filter, 2000 hours
- Monitor Loophthrough
- Built-In Anti-theft security
- Room-filling sound from 7W speaker
- Ceiling or floor mount
- No shadow /No glare

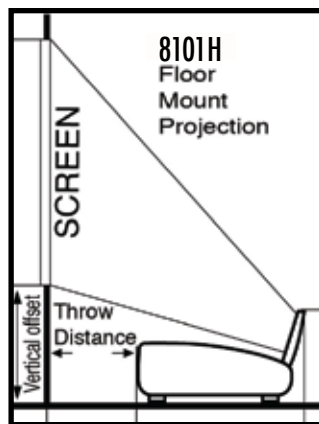

DIAGONAL	WIDTH	THROW DISTANCE	VERTICAL OFFSET
INCHES	INCHES	INCHES	INCHES
60	48	4	11
70	56	7	13
80	64	10	14
90	72	13	15.5
100	80	16	17
120	96	22	20
150	120	31	24

DUKANE

Dukane Corporation
Audio Visual Products Division
2900 Dukane Drive
St. Charles, Illinois 60174
866-280-4298
630-584-5156
avsales@dukcorp.com
www.dukcorp.com/av



toll-free
fax
e-mail

ImagePro is a registered trademark of Dukane Corporation
#09081.1

Specifications

8101H

Image Element 0.63" polysilicon active-matrix TFT x3
 Brightness 2500 ANSI lumens (2000 lumens in Whisper Mode)
 Resolution 1024 x 768 pixels (H X V), XGA
 Contrast 500:1
 Scanning Frequency fh 15 -106 kHz, fv 50-120 Hz
 Lens Fixed
 Lens Throw Ratio SEE TABLE THIS PAGE
 Keystone Correction Digital, vertical +/-5 deg
 Aspect Ratio 4:3, 16:9 selectable
 Computer Compatibility SVGA, VGA, XGA, SXGA, UXGA
 Video Compatibility MAC13" and MAC16" NTSC, NTSC4.43, PAL, SECAM, PAL-M, PAL-N, HDTV (1080i, 720p, 576i, 480i/p)
 Image Control Freeze function, electronic magnification and pan
 Closed Caption CC1, CC2, CC3, CC4, TI, T2, T3, T4
 Projection Modes Front/rear/ceiling
 Color Reproduction 24 bit (16.7 million)
 Lamp 220W UHB
 Lamp Life 2000 hours (typical) 3000 hours (whisper mode)
 Audio 1 speaker 7 watt
 Throw Distance 4" to 31"
 Screen Size, diagonal 60" to 150"
 Inputs, Video (1) Component, RCA x 3 (1) S-video, Mini DIN 4-pin (1) Composite video, RCA x 1
 Inputs, Computer (2) RGB, 15 pin D-sub
 Inputs, Audio (2) Stereo mini jack: for PC/Access. (1) RCA x 2 (for video)
 Outputs, Audio (1) Stereo mini jack, adjustable
 Outputs, Monitor RGB, 15 pin D-sub
 Outputs, Control RS-232, 9 pin D-sub
 Security Kensington lock slot & Security Bar
 Fan Level 33dB, ultra quiet; 28dB Whisper Mode
 Operating Temperature 41-95 deg F
 Power AC 100-120V, AC 220-240V 50/60 Hz, 340 watt
 Size (WxHxD) 15.6" x 5.2" x 14.0"
 Weight 12.8 lbs.
 CARTON (WxHxD) 22" X 9.5" X 19"
 Shipping Weight 24 lbs.
 Accessories Included Remote control, batteries, power cord, RGB cable, RCA video cable and operators manual.
 Safety UL/C-UL, FCC Class B
 Optional Accessories Lamp 456-8101H Wall; 8100WALLARM Ceiling Mount, Universal; RPM-U Filter; UX35381

Five (5) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 1 year Peace-of-Mind Loaner Program.

