


Technical Data Sheet

LVC-S—Low Voltage Control Switch By Draper

- USES:** Up, Down and Stop control of an LVC III (low voltage control module) via wall switch.
- COMPATIBILITY:** The LVC-S can be used with the LVC-III or the MC1. Other controls may be connected to the LVC-III or MC1 simultaneously:
- a. WRT/R radio frequency remote control package, and
 - b. IRT/R infrared remote control package.
 - c. LVC-SL LED low voltage control switch.
 - d. Multiple LVC-Ss may be used to control one LVC-III or MC1.
- Auxiliary control systems employing momentary "dry" contacts.
SP-KSM 3-position momentary key switch (beware: Stop won't work).
- CONTACTS:** Three individual Single Pole, Single Throw contacts (On/Off). Momentary action. Latching contacts are part of the LVC-III and MC1.
- RATING:** 10V 25mA
- DESCRIPTION:** The LVC-S is a 3-button (Up, Stop, Down) wall switch which controls an LVC III (low voltage control module). The buttons are oval. The 2¾" x 4½" cover plate is plastic, and finished white. It fits a single-gang box. There are no wire leads: there are screw terminals on the back for Down, Common, and Up.

ILLUSTRATION:

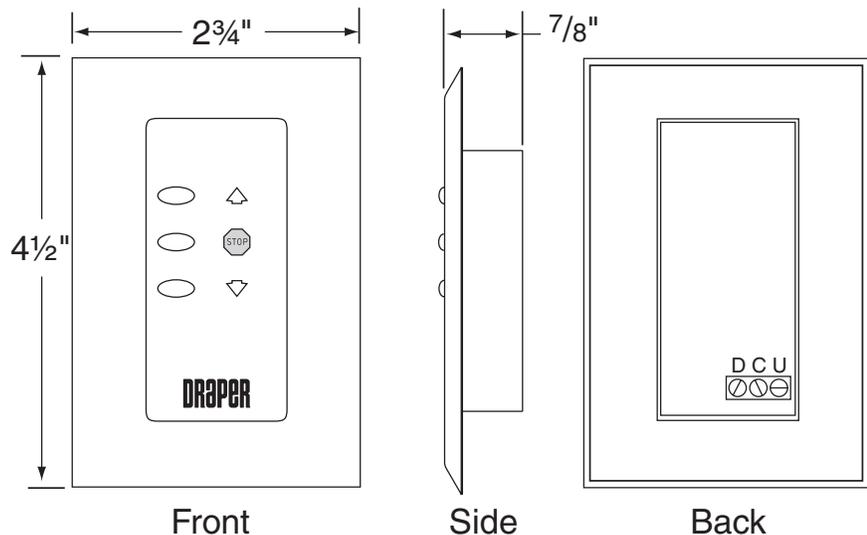

DRAPER

411 S. Pearl St., Spiceland, IN 47385 USA ■ 765-987-7999 ■ fax 765-987-7142
e-mail draper@draperinc.com ■ www.draperinc.com

Copyright ©2005 Draper Inc. Form LVC-S_TechDataSheet05 Printer in U.S.A.

