


# Technical Data Sheet

## VIC-115 Video Interface Control By Draper

- USES:** The VIC-115 replaces the standard single-station control switch for all screens or shades where a 115 volt trigger circuit is turned on to lower the product, and turned off to raise the product..
- COMPATIBILITY:** The VIC-115 is intended as the sole control, and cannot be used with any other control, except the optional override switch (VIC-OS).  
Please Note: If VIC-115 is built-in, VIC-OS cannot be used.
- CONTACTS:** Single-Pole, Double-Throw (Common, Normally Closed, Normally Open).
- RATING:** Contacts: 240 Volts, 10 A; 28V DC, 15 A, UL recognized, CSA recognized.  
Coil: 110/120V AC.  
Requires 100 MilliAmps input.
- DESCRIPTION:** A relay with COM/NC/NO contacts, and a 120V coil, housed in a metal box. Box measures 3" x 4" x 5" and has three pigtailed leading from it:  
a. A 7½ ft. black cord with 3-pronged plug for constant 115V AC.  
b. An 8½ ft. white cord with 2-pronged plug for switched 115V AC.  
c. Four 6" wire leads for the motor: blue, red, white, green (up, down, neut., grd).

### ILLUSTRATION:

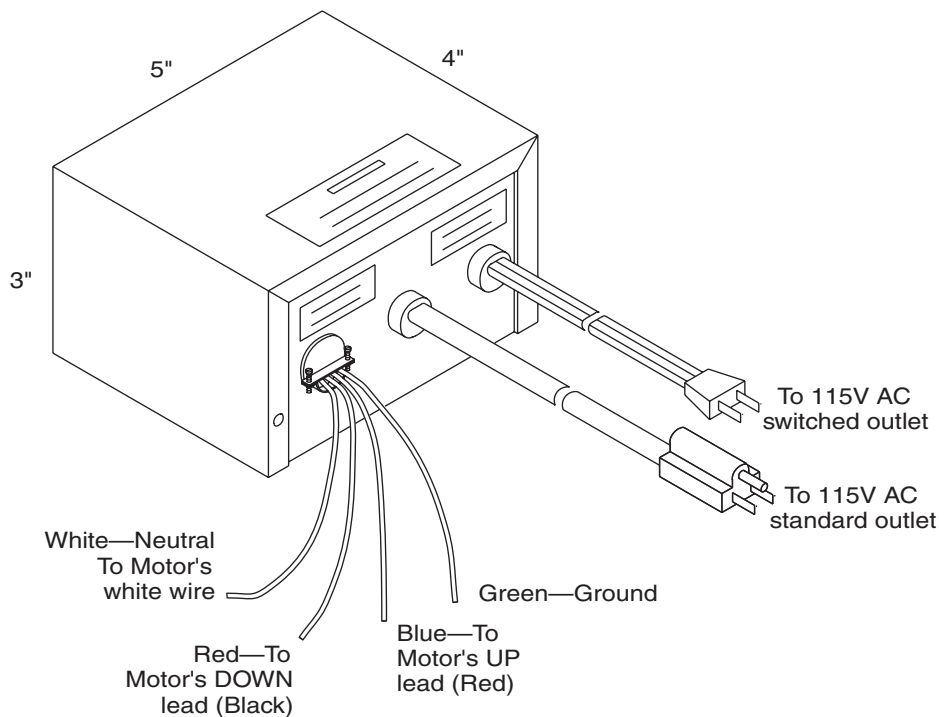

# DRAPER

411 S. Pearl St., Spiceland, IN 47385 USA ■ 765-987-7999  
www.draperinc.com ■ fax 765-987-7142

Copyright ©2007 Draper Inc. Form VIC-115\_TechDataSheet07 Printer in U.S.A.