

8111H

ImagePro 8111H Portable Short Throw LCD



The ImagePro 8111H is a light (8.2lbs), easy-to-install Short Throw LCD projector ideal for classroom or conference room.

8111H FEATURES

- 2000 Lumens Brightness
- WXGA Resolution
- Lamp access on top
- High performance (4000 HR) hybrid filter with easy side access
- Short throw Ratio of 0.5
- Networking, Built-In RJ45
- New 3000/4000 hour lamp
- Built-in Anti-theft security
- Audio pass through when projector is off
- HDMI input



Dynamic Short Throw Lens enables projector to be positioned close to screen or white board

THE ALL NEW
DUKANE
Education. Presentation. Inspiration.



Convey by Dukane delivers control of classroom audio visual assets in sync with our Convey AClick Student Response System. Experience tomorrow's classroom today with Convey. Visit www.conveyclassrooms.com.


Toll-free: 866-280-4298 • Web: www.dukane.com/av
Fax: 630-584-5156 • E-mail: avsales@dukane.com

Call Dukane: 866.280.4298

ImagePro 8111H Short Throw LCD projector

Back Panel

Connections

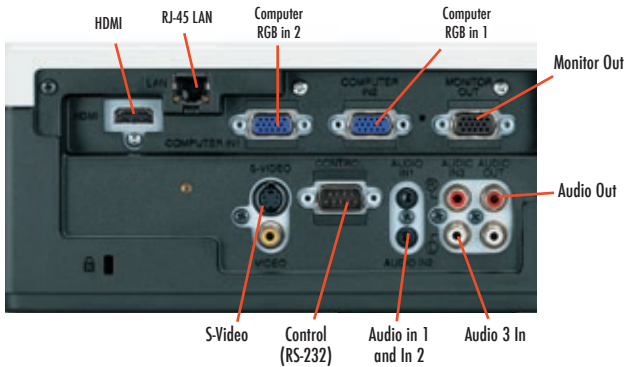

Key features:

- WXGA (1280 x 800) resolution
- Short throw for small rooms and IW Boards
- 2000 ANSI lumens of brightness
- Whiteboard & Blackboard Modes
- Easy maintenance with lamp access on top, 4000 hour filter with side access
- Monitor loopthrough & remote mouse control
- Instant On and Off
- Built-In Anti-theft security
- Audio passthrough for sound when projector is off
- 3000/4000 hour lamp life
- Lock slot, security bar and transition detector
- Five Year Warranty and One Year Peace of Mind Service

8111H Projection Table

Image Size 16:10		Throw Distance	
Diagonal	Width	Min.	
Inches	Inches	Inches	
63	53	26	
77	65	33	
80	68	34	
90	76	38	
100	85	43	

Throw Ratio (Distance to Width) Fixed at 0.5

Tolerance is 8% on throw distance.

THE ALL NEW
DUKANE
Education. Presentation. Inspiration.

Audio Visual Products
2900 Dukane Drive
St. Charles, Illinois 60174
Toll-free: 866.280.4298
Fax: 630-584-5156
E-mail: avsales@dukane.com
Web: www.dukane.com/av



ImagePro is a registered trademark of Dukane Corporation

#10-10002-1

Specifications

Image Element	8111H 0.59" polysilicon active-matrix TFT x3
Brightness	2000 ANSI lumens
Resolution	1280 x 800 pixels (H X V), WXGA
Contrast	400:1
Scanning Frequency	fh 15 -106 kHz, fv 50-120 Hz
Lens	Fixed, Digital Zoom x 1.3
Lens Throw Ratio	0.5 : 1 throw distance to image width
Keystone Correction	Digital, vertical +/- 5 deg
Aspect Ratio	Native 16:10, 4:3 selectable
Computer Compatibility	VGA, SVGA, XGA, WXGA, SXGA(+), UXGA, MAC16"
Composite Video	NTSC, NTSC4.43, PAL, SECAM, PAL-M, PAL-N, PAL60,
Component Video	HDTV (1080i/p, 720p, 576i/p, 480i/p)
Image Control	Freeze function, electronic magnification and pan
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	180W UHB
Lamp Life	3000 hours (typical) 4000 hours (whisper mode)
Audio Output	1 Speaker, 10W
Throw Distance	25" to 60"
Screen Size, diagonal	60" to 100"
Inputs, Video	(1) S-video, Mini DIN 4-pin (1) Composite video, RCA x 1
Inputs, Computer	(2) RGB, 15 pin D-sub
Inputs, Digital	(1) HDMI
Inputs, Audio	(2) Stereo mini jack: for PC/Accessories (1) RCA x 2 (for video)
Outputs, Audio	(1) RCA x 2, adjustable L&R
Outputs, Monitor	RGB, 15 pin D-sub
Control	RS-232, 9 pin D-sub
Ethernet	RJ-45
Security	Kensington lock slot & Security Bar
Fan Level	37dB, ultra quiet; 29dB Whisper Mode
Closed Caption	CCI, CC2, CC3, CC4, T1,T2,T3,T4
Operating Temperature	41-95 deg F
Power	AC 100-120V, AC 220-240V 50/60 Hz, 250 watt
Size (WxHxD)	13.1" x 4.1" x 11.9"
Weight	8.2 lbs.
Shipping Weight	14 lbs.
Carton Size	15" x 17" x 18"
Accessories Included	Remote control, batteries, power cord, RGB cables, operators manual
Safety	UL/C-UL, FCC Class B
Optional Accessories	Lamp 456-8110H Ceiling Mount, Universal; RPM-U Filter; UX35971

Five (5) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 1 year Peace-of-Mind Loaner Program.

5YR