

# 8403

## ImagePro 8403 Portable DLP Projector



*The ImagePro 8403 is a bright (2800 lumens) versatile DLP projector with Brilliant Color™, and HDTV compatible*

### 8403 FEATURES

- 2800 lumen brightness
- XGA resolution (1024 X 768)
- Brilliant Color™ DLP Technology
- Filter Free Design
- Contrast ratio of 3000 to 1
- Lamp life of 3000/4000 hours
- HDTV ready, HDCP compliant
- Audio pass-through for volume control when operating
- Dukane 5-Year Warranty
- Rapid power ON and OFF

THE ALL NEW

# DUKANE

**Education. Presentation. Inspiration.**

[www.dukcorp.com/av](http://www.dukcorp.com/av)




Convey by Dukane delivers control of classroom audio visual assets in sync with our Student Response System. Experience tomorrow's classroom today with Convey.

Visit [www.conveyclassrooms.com](http://www.conveyclassrooms.com).

Call Dukane: 866-280-4298

# ImagePro 8403 Portable DLP projector

## Back Panel Connections

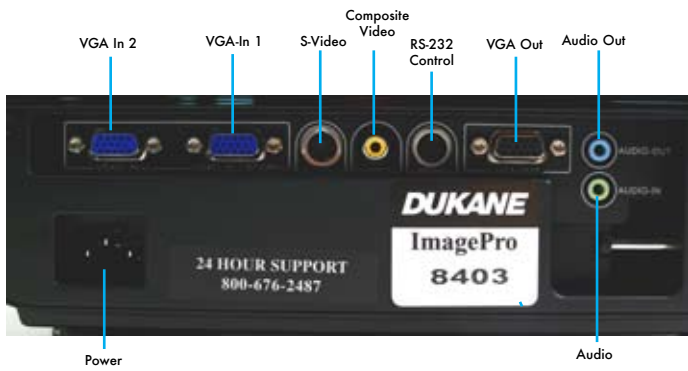

### FEATURES

- XGA (1024 x 768) resolution
- 2800 ANSI lumens of brightness
- 3000:1 contrast ratio
- Status, control and maintenance over the network
- Speaker, 2 watt
- Brilliant color images
- Vertical keystone correction
- Only 5 lbs.
- No filter to service
- Controllable remotely
- Lamp life of 3000/4000 hours
- 5-Year Warranty

### 8403 Projection Table

Image Size 4:3		Throw Distance	
Diagonal	Width	Min.	Max.
Inches	Inches	Feet	Feet
40	32	5.2	5.7
60	48	7.8	8.6
80	64	10.4	11.5
100	80	13.0	14.3
120	96	15.6	17.4

Throw Ratio (distance to width) to 1.95 2.15



Dukane Corporation  
Audio Visual Products Division  
2900 Dukane Drive  
St. Charles, Illinois 60174  
866-280-4298  
630-584-5156  
avsales@dukcorp.com  
www.dukcorp.com/av



toll-free  
fax #09096  
e-mail

### Specifications

Image Element 0.55" DND DLP "Brilliant Color"  
Brightness 2800 ANSI lumens (2100 econo mode)  
Resolution 1024 x 768 pixels (H X V), XGA  
Contrast 3000:1  
Scanning Frequency fh 15-91 kHz, fv 25-85 Hz  
Lens Manual zoom, 1.1X

Lens Throw Ratio 1.95-2.15 throw distance to image width  
Keystone Correction Digital vertical +/-40°  
Aspect Ratio 4:3 native, 16:9, 16:10 selectable  
Computer VGA, SVGA, XGA, SXGA, UXGA  
Compatibility Mac compatible  
Offset 115%  
Video Compatibility NTSC, PAL, PAL-M  
SECAM, HDTV1080i/p, 720p, 480i/p,

Closed Caption CC1, CC2  
Projection Modes Front/rear/ceiling  
Color Reproduction 1.07 billion colors  
Lamp 185W, VIP  
Lamp Life 3000 hours (4000 hours econo mode)  
Audio One 2 watt speaker  
Throw Distance 4 to 33'  
Screen Size, diagonal 30" to 300"

Inputs, Video (1) S-video, Min DIN 4-pin,  
(1) Composite video, RCA x 1

Inputs, Computer (2) RGB Signal: D-sub, 15 pin,  
(1) Audio, Stereo mini jack

Outputs Monitor 15 pin, D-sub (normal/standby)  
Outputs Audio Audio, Stereo mini jack x 1  
Outputs, Other 3-pin, RS232

Security Kensington slot, security bar,  
keypad lock

Fan Level 32dB, (30dB in econo mode)  
Operating Temperature 41 to 104 deg. F (5-40 deg C)  
Power AC 100-120V, AC220-240V  
50/60 Hz, 255 watt

Size (WxHxD) 11.3" x 4" x 7.6"

Weight 5.0 lbs. (2.3 kg)

Carton Size 7" x 19" x 13"

Shipping Weight 12 lbs.

Accessories Included Remote control, batteries (AA), power  
cord, Computer cable, User manual,  
lens cap

Safety FCC, CUL, UL

Optional Accessories Lamp 456-8403  
Ceiling mount, universal, RPA-U  
or PRG-UNV

Five (5) year limited warranty on parts and labor in North  
America, lamp excluded (for other locations, local warranties  
apply). Includes Dukane's FREE 1 year Peace-of-Mind Loaner  
Program.