

8755J

ImagePro 8755J Portable LCD Projector



The ImagePro 8755J is a light (7.7lbs), easy-to-install portable LCD projector ideal for classroom or conference room.

8755J FEATURES

- 2200 Lumens Brightness
- XGA Resolution
- Lamp access on top
- High performance (5000 HR) hybrid filter with easy side access
- New 16 Watt Audio Output
- Instant on ON and OFF
- New 3000/6000 hour lamp
- Built-in Anti-theft security
- Audio "passthrough" permits use of sound system to play CDs on the PC when projector is off



NEW FRONT-LOADING HYBRID FILTER GIVES 5000 HOURS OF PROJECTOR PERFORMANCE

THE ALL NEW

DUKANE

Education. Presentation. Inspiration.

www.dukcorp.com



Convey by Dukane delivers control of classroom audio visual assets in sync with our Student Response System. Experience tomorrow's classroom today with Convey.


Visit www.conveyclassrooms.com. Call Dukane: 800-265-2141

ImagePro 8755J

Portable LCD projector

Back Panel

Connections

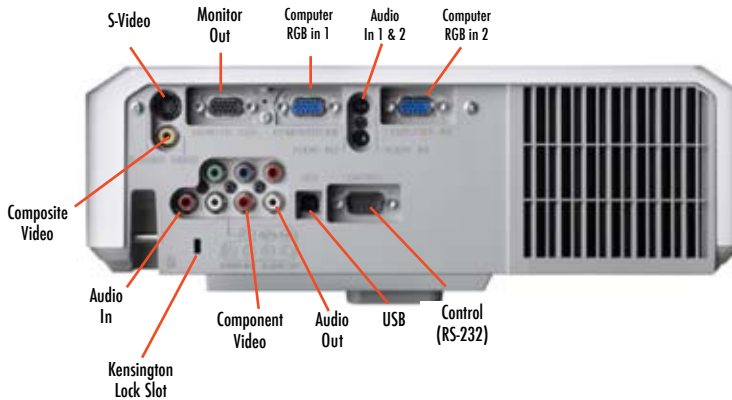

Key features:

- XGA (1024 x 768) resolution
- 2200 ANSI lumens of brightness
- Whiteboard & Blackboard Modes
- Easy maintenance in ceiling mount with lamp access on top & 5000 hour filter with front access
- Monitor loopthrough & remote mouse control
- Instant On and Off
- Built-In Anti-theft security
- Audio passthrough for sound when projector is off
- 16 Watt audio output
- 3000/6000 hour lamp life
- Lock slot, security bar and transition detector
- Five Year Warranty and One Year Peace of Mind Service

8755J Projection Table

Image Size 4:3		Throw Distance	
Diagonal	Width	Min.	Max.
Inches	Inches	Feet	Feet
30	24	2.8	3.4
60	48	5.8	7.0
80	64	7.8	9.3
100	80	9.8	11.7
120	96	11.7	14.1
150	120	14.7	17.6
200	160	19.5	23.5
300	240	29.3	35.3

Throw Ratio (distance to width) 1.46 1.75

DUKANE

Dukane Corporation
 Audio Visual Products Division
 2900 Dukane Drive
 St. Charles, Illinois 60174
 866-280-4298
 630-584-5156
 avsales@dukcorp.com
 www.dukcorp.com/av

toll-free
 fax
 e-mail



ImagePro is a registered trademark of Dukane Corporation

Specifications

Image Element	0.63" polysilicon active-matrix TFT x3
Brightness	2200 ANSI lumens (1800 lumens in Whisper Mode)
Resolution	1024 x 768 pixels (H X V), XGA
Contrast	500:1
Scanning Frequency	fh 15 -106 kHz, fv 50-120 Hz
Lens	Manual zoom (F2.3 - 2.5), 1.2X
Lens Throw Ratio	1.46 - 1.75:1 throw distance to image width
Keystone Correction	Digital, vertical +/-30 deg
Aspect Ratio	4:3, 16:9 selectable
Computer Compatibility	SVGA, VGA, XGA, SXGA, UXGA MAC13" and MAC16"
Video Compatibility	NTSC, NTSC4.43, PAL, SECAM, PAL-M, PAL-N, Component Video, HDTV (1080i/p, 720p, 576i, 480i/p)
Image Control	Freeze function, electronic magnification and pan
Mouse Control	Using USB
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	210W UHB
Lamp Life	3000 hours (typical) 6000 hours (whisper mode)
Audio Output	2 x speakers, 16 watt
Throw Distance	34" to 423"
Screen Size, diagonal	30" to 300"
Inputs, Video	(1) Component, RCA x 3 (1) S-video, Mini DIN 4-pin (1) Composite video, RCA x 1
Inputs, Computer	(2) RGB, 15 pin D-sub
Inputs, Audio	(2) Stereo mini jack: for PC/Access. (1) RCA x 2 (for video)
Outputs, Audio	(1) RCA x 2 adjustable
Outputs, Monitor	RGB, 15 pin D-sub
Outputs, Control	RS-232, 9 pin D-sub USB (Mouse control)
Security	Kensington lock slot & Security Bar
Fan Level	35dB, ultra quiet; 29dB Whisper Mode
Closed Caption	CC1, CC2, CC3, CC4, T1,T2,T3,T4
Operating Temperature	41-95 deg F
Power	AC 100-120V, AC 220-240V 50/60 Hz, 330 watt
Size (WxHxD)	12.5" x 3.9" x 11.3"
Weight	7.7 lbs.
Shipping Weight	14 lbs.
Carton Size	15" x 8" x 19"
Accessories Included	Remote control, batteries, power cord, RGB cablenoperators manual
Safety	UL/C-UL, FCC Class B
Optional Accessories	Lamp 456-8755J Ceiling Mount, Universal; RPM-U Filter; MU06481

Five (5) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 1 year Peace-of-Mind Loaner Program.

5YR