

# 8763A

## ImagePro 8763A Portable LCD Projector



*The ImagePro 8763A is a super wide angle, short throw LCD projector ideal for classrooms*

### 8763A FEATURES

- 2500 Lumens Brightness
- XGA Resolution
- 500:1 contrast ration
- Auto Keystone Correction
- Auto Ceiling Detection
- Short throw distance allows projector to be placed close to the screen
- Powerful 8 Watt Audio Speaker
- Side change filter and lamp
- New improved 2000 hour filter



### SIDE-LOADING HYBRID FILTER ALLOWS EASY PROJECTOR MAINTENANCE

THE ALL NEW

# DUKANE

**Education. Presentation. Inspiration.**

[www.dukcorp.com](http://www.dukcorp.com)




Convey by Dukane delivers control of classroom audio visual assets in sync with our Student Response System. Experience tomorrow's classroom today with Convey.

Visit [www.conveyclassrooms.com](http://www.conveyclassrooms.com). Call Dukane: 800-265-2141

# ImagePro 8763A

## Back Panel Connections

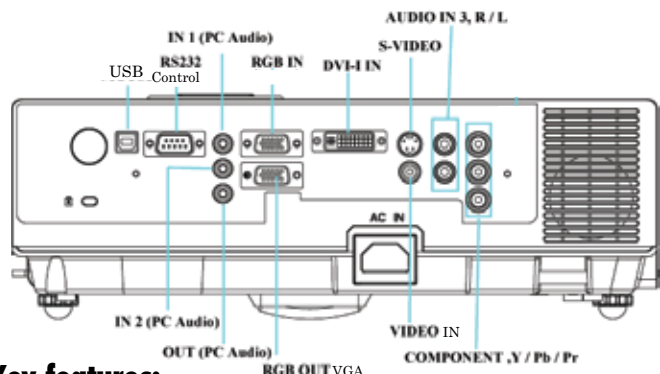

### Key features:

- 2500 Lumens Brightness
- XGA Resolution (1024 X 768)
- 500:1 Contrast Ratio
- Auto Digital Keystone Correction
- Side change for filter and lamp
- New 8 Watt Audio speaker
- Manual zoom & focus
- Short throw distance
- Three Year Warranty and One Year Peace of Mind Service
- New D-sub for RS-232C connection
- New 2000 hour electrostatic filter



### 8763A Projection Table

Image Size 4:3		Throw Distance	
Diagonal	Width	Min.	Max.
Inches	Inches	Feet	Feet
40	32	2.5	3.1
50	40	3.2	4.0
60	48	3.9	4.8
80	64	5.2	6.4
100	80	6.6	8.0
200	160	13.4	16.1
300	240	20.0	24.0

Throw Ratio (distance to width) = 1.0  
 (Projector distances / Image width) 1.2



Dukane Corporation  
 Audio Visual Products Division  
 2900 Dukane Drive  
 St. Charles, Illinois 60174  
 800-245-1966  
 630-584-5156  
 avsales@dukcorp.com  
 www.dukcorp.com/av

toll-free  
 fax  
 e-mail

ImagePro is a registered trademark of Dukane Corporation



### Specifications

Image Element	0.63" HTPS TFT x 3
Brightness	2500 ANSI lumens 2000 (whisper mode)
Resolution	1024 x 768 pixels (H x V), XGA
Contrast	500:1
Scanning Frequency	fh 31-92 kHz, fv 48-120 Hz
Lens	Manual zoom and focus, special wide angle attachment available
Lens Throw Ratio	1.0-1.2 :1 throw distance to image width
Keystone Correction	Digital, vertical +/-30 deg, automatic horizontal +/- 10 deg
Aspect Ratio	4:3, 16:9 selectable
Computer	VGA, SVGA, XGA SXGA, WXGA, UXGA
Compatibility	MAC
Video Compatibility	NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, SECAM, HDTV 1080i, 720p, 525p/i, 625i, 480p
Image Control	Freeze function, electronic magnification 4X zoom and pan
Mouse Control	Using USB
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	200W
Lamp Life	2000 hours (3000 in whisper mode)
Audio Speaker	8 Watt mono
Throw Distance	2.5' to 24'
Screen Size, diagonal	40" to 300"
Inputs, Video	S-video, Min DIN 4-pin, (1) Composite video, RCA x 1
Inputs, Computer	(1) DVI-I (1) RGB Signal: D-sub, 15 pin (2) Audio, Stereo mini-jack x 1
Outputs Monitor	(1) 15 pin, D-sub, RGB
Outputs Audio	(1) Audio, Stereo mini jack x 1, volume controlled
Outputs, Control	RS232C, D sub 9 USB connector, Mouse control
Closed Caption	CC 1/4, T1/4
Security	Kensington lock slot & anchor bar
Fan Level Sound	33dB
Filter	5 mm hybrid, 2000 hours
Operating Temperature	41 to 95 deg. F (5-35 deg C)
Power	AC 100-120V, at 50-60 hz, 285 watt
Size (WxHxD)	17.8" x 3.8" x 12.6"
Weight	8.4 lbs. (3.8kg)
Carton Size	20" x 14" x 17"
Shipping Weight	14 lbs.
Accessories Included	Remote control, batteries, power cord, Computer cable, USB cable, User Manual, CD ROM
Safety	UL, CUL, FCC, CE, CB, CCC, UCIC
Optional Accessories	Lamp 456-8763A

Specifications subject to change without notice.

Three (3) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 1 year Peace-of-Mind Loaner

