




## ImagePro 8781 Portable LCD Projector

- 2600 lumen brightness
- XGA resolution
- Network Control, Maintenance and Security, RJ-45
- Lamp access on top & easy high performance filter access on side
- Wireless 802.11 Network operation
- Monitor loophrough
- Remote mouse control
- HDTV ready
- Built-In Anti-theft security

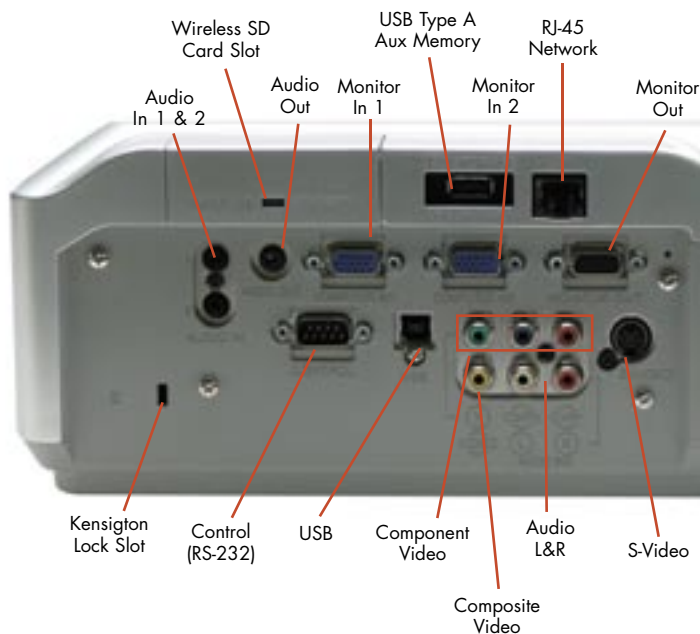

# 8781 DUKANE

# ImagePro 8781

## Portable LCD projector

The ImagePro 8781 is a LCD projector that can be used in a variety of applications. With sufficient brightness for classrooms and conference rooms the 8781 is designed to be reliable and easy to maintain.

Computer-less presentations using your SD Card or USB Flash Drive. Wireless operation using 802.11 b/g via an SD receiver. Can connect to 4 PC's wirelessly. Lamp and filter access points are conveniently located and Kensington™ lock slot and our new security bar makes this projector secure and a wise multimedia investment.



### Key features:

- XGA (1024 x 768) resolution
- 2600 ANSI lumens of brightness
- Network connection for control, maintenance, and security, RJ-45
- Easy maintenance in ceiling mount with lamp access on top & filter access on side
- Monitor loopthrough & remote mouse control
- Remote control with "My Buttons"
- Built-In Anti-theft security
- Wireless 802.11 b/g operation
- Auto Vertical keystone correction
- HDTV ready & progressive scan
- Kensington lock slot & security bar
- Five Year Warranty and One Year Peace of Mind Service

8781 Projection Table

Image Size 4:3		Throw Distance	
Diagonal	Width	Min.	Max.
Inches	Inches	Feet	Feet
30	24	2.8	3.4
60	48	5.8	7.0
80	64	7.8	9.3
100	80	9.8	11.7
120	96	11.7	14.1
150	120	14.7	17.6
200	160	19.5	23.5
300	240	29.3	35.3

Throw Ratio (distance to width), 1.5 1.8

# DUKANE

Dukane Corporation  
 Audio Visual Products Division  
 2900 Dukane Drive  
 St. Charles, Illinois 60174  
 Toll-free: 800-676-2485  
 Fax: 630-584-5156  
 avsales@dukcorp.com  
 www.dukcorp.com/av



#080006

ImagePro is a registered trademark of Dukane Corporation

## Specifications 8781

Image Element	0.63" polysilicon active-matrix TFT x3
Brightness	2600 ANSI lumens (2100 lumens in Whisper Mode)
Resolution	1024 x 768 pixels (H X V), XGA
Contrast	500:1
Scanning Frequency	fh 15 -106 kHz, fv 50-120 Hz
Lens	Manual zoom (F1.6 – 1.8), 1.2X
Lens Throw Ratio	1.5:1.8 throw distance to image width
Keystone Correction	Digital, vertical +/-30 deg
Aspect Ratio	4:3, 16:9 selectable
Computer Compatibility	SVGA, VGA, XGA, SXGA, UXGA Compressed PC and MAC13" and MAC16"
Video Compatibility	NTSC, NTSC4.43, PAL, SECAM, PAL-M, PAL-N,
Component Video, Image Control	HDTV (1080i, 720p, 576i, 480i/p) Freeze function, electronic magnification and pan
Mouse Control	Using USB, Type B
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	220W UHB
Lamp Life	2000 hours (typical) 3000 hours (whisper mode)
Audio	1 speaker 7 watt
Throw Distance	34" to 423"
Screen Size, diagonal	30" to 300"
Inputs, Video	(1) Component, RCA x 3 (1) S-video, Mini DIN 4-pin (1) Composite video, RCA x 1
Inputs, Computer	(2) RGB, 15 pin D-sub
Inputs, Audio	(2) Stereo mini jack (1) RCA x 2 (for video)
Outputs, Audio	(1) Stereo mini jack
Outputs, Monitor	RGB, 15 pin D-sub
Control	RS-232, 9 pin D-sub USB Mouse control, Type B
Wireless	802.11 b/g with SD card
Network Connection	LAN, RJ-45
Other	USB Type A, Storage SD Card Slot
Security	Kensington lock slot & Security Bar
Fan Level	33dB, ultra quiet 29dB in Whisper Mode
Operating Temperature	41-95 deg F
Power	AC 100-120V, AC 220-240V 50/60 Hz, 320 watt
Size (WxHxD)	13.4" x 4.6" x 10.6"
Weight	8.8 lbs.
Shipping Weight	18 lbs.
Carton Size	19" x 14" x 10"
Accessories Included	Remote control, batteries, power cord, RGB cable, RCA video cable, operators manual and soft carry case.
Safety	UL/C-UL, FCC Class B
Optional Accessories	Lamp 456-8755G, Ceiling Mount, Universal; RPM-U, Wireless card:VA08331

Five (5) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 1 year Peace-of-Mind Loaner Program.

# 5YR