

Please read this manual before using this projector

RLM W6

User's Guide



BARCO

Visibly your

Warning, Notices and Safety Instructions 4

Notice	4
Description pertaining to FCC Rules Part 15	4
Warning and Safety Instructions	5
Notices you should read prior to the installation of the projector	7

Projector parts and functions 10

Front view	10
Rear view	10
Bottom view	12
Range of effective remote control signal reception	13
Installing batteries in the remote control	13

Quick installation of the projector. 14

Throw distance	17
Modes of installation	17
Horizontal and vertical lens shift	19

Installing the projector 20

Connecting the projector to other devices	20
12V Trigger connection	20
RGB connection	21
RGBs connection	22
IR INPUT connection	22
S-Video/Video connection	23
COMPONENT connection	23
Turning on the projector	24
Changing OSD language	24
Adjusting screen orientation	25
Adjusting the projector lens	26

Using the remote control	27
---------------------------------	-----------

OSD Menu Tree	29
----------------------	-----------

OSD Menu description	29
-----------------------------	-----------

OSD Description	31
INPUT	31
IMAGE	33
LAYOUT	40
LAMP	42
ALIGNMENT	44
CONTROL	46
SERVICE	49

Lamp and filter maintenance	50
------------------------------------	-----------

Lamp replacement	50
Cleaning the filter	51

Simple troubleshooting and definition of the LED indicators	52
--	-----------

LED STATUS	53
-------------------	-----------

Projector specifications	54
---------------------------------	-----------

1 Warning, Notices and Safety Instructions

Notice

Please write down your projector model number and serial number and keep the information for maintenance purposes in the future. Should the equipment be lost or stolen, the information could also be used for the police report.

Model number:

Serial number:

.....

Please check the accessories that come with the projector with the following list. Should you find any missing accessory, contact your dealer immediately.

- 1: US specification power cord*1
- 2: EU specification power cord*1
- 3: China specification power cord*1
- 4: Remote control *1
- 5: AA battery *2
- 6: User's Guide *1
- 7: Setup Manual *1
- 8: Safety Manual *1
- 9: Warranty Card *1
- 10: WEEE Notification Card *1
- 11: CD ROM *1

Description pertaining to FCC Rules Part 15

This device has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy. If not installed and used in accordance with the instructions, may cause harmful interference to radio or television reception. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment in to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This Class A digital apparatus meets all requirements of the Canadian ICES-003 Standards.
Cet appareil numérique de la classe A est conforme à la norme NMB-003 du Canada.

The lamp(s) in this product contain mercury. This product could contain other electronic wastes that might be hazardous if not handled properly. Please consult your local/state/federal regulations regarding disposal or recycling.



For more information, please contact Electronic Industries Alliance (WWW.EIAE.ORG).

For information on proper lamp handling, visit WWW.LAMPRECYCLE.ORG.

Warning and Safety Instructions

Special Care for Laser Beams!

Special care should be considered when DLP projectors and high power laser equipment are used in the same room as.

Direct or indirect hit of a laser beam on to the projector lens can severely damage the Digital Mirror Devices (DMD™).


Sun light Warning

Avoid using the RLM W6 in direct sun light.

Sun light on the projector lens can severely damage the Digital Mirror Devices (DMD™).

Never look into the projector light source directly

This equipment contains a high brightness light source and a portion of the light emitted by the projector is ultraviolet light. Never look into the projector light source directly and pay special attention to prevent children from looking into the projector light source as it can damage their eyes.

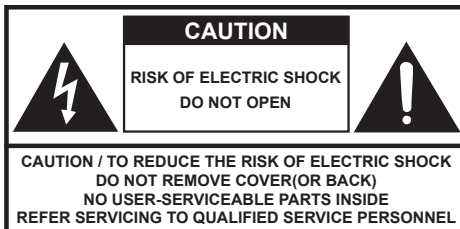

The lightning flash with an arrowhead within a triangle is intended to tell the user that inside this product may cause risk of electrical shock to persons.



The exclamation point within a triangle is intended to tell the user that important operating and/or servicing instructions are included in the technical documentation for this equipment.

Do not turn off the projector by unplugging the power cord.

Under normal operations, be sure to use the SOFT POWER button to turn off the projector as the internal cooling fans will remain working for approximately 90 seconds after the projector has been turned off for the shutdown process to be completed. And as such, avoid shutting off AC power to turn off the projector since it could lead to lamp malfunctioning or damage.

Electric shock

To protect your projector, avoid turning on the projector during lightning storms and unplug it from the wall outlet. This will prevent sudden electrical surges caused by the lightning from damaging the projector.

Warning, Notices and Safety Instructions

Do not overload wall outlets/extension cords

Pay attention to the current load of the outlet you are using, be it wall outlet or extension cord outlet to prevent fire or electric shock.

.....

Cleaning

When cleaning the projector, be sure to unplug it from the wall outlet to prevent electric shock.

Do not use liquid or aerosol cleaners. Use a dry/damp cloth with excessive moisture removed for cleaning. Be sure to use cleaning cloth designed to clean monitors for the projector to prevent damages to the projector casing due to abrasion.

.....

Dampness, smoke, steam, dust, high temperature and direct exposure to sunlight

Do not operate the projector in environments where it could be exposed to dampness, smoke, steam, dust, high temperature or direct sunlight. For example: bathroom, kitchen, adjacent to washing machine, damp basement rooms, electric heaters or similar environments. Keeping or operating the projector in the above-mentioned environment could lead to discoloration, mold formation, grease or damages to the projector.

.....

Ventilation

The projector case is designed with slots and openings to remove the heat inside the projector so that it will not overheat and damage the components. Be sure to operate the projector in an environment with ideal ventilation and don't operate it on a sofa, rug or other closed-in environments that could obstruct ventilation.

.....

Intrusion of foreign objects

Be sure to keep all foreign objects away from entering the projector because it could be exposed to hazardous voltages and cause parts to short circuit. This could in turn lead to fire hazard or electric shock. Examples of foreign objects include: cockroach, screws, liquid and so forth.

In addition, never spill liquid into the projector.

.....

Carrying the projector

When moving the projector on a cart, be sure to handle the cart with care as abrupt stops, jolts of excessive force or uneven ground could lead the projector to topple.



Please install the projector on an even and stable surface

Avoid placing the projector on unstable cart, tripod, table and so forth to prevent the projector from falling, becoming damaged or causing injuries.

.....

Servicing

Should you encounter problem with the projector, please seek assistance from your local dealer or qualified service personnel. Do not attempt to service the projector yourself so that you would not be exposed to high voltage or other potential hazards.

Should you encounter any of the following situation, please unplug your projector from the wall outlet and contact a qualified service personnel for assistance:

- Damaged power cord or power plug.
- If a foreign object has fallen into the projector or if you have spilled water or other liquid into the projector.
- If the projector has been dropped accidentally or damaged.
- If you experience noticeably poor performance or malfunctioning with the projector despite having followed instructions for normal operation.

Changing parts

Should any part of the projector be damaged, check with your servicing personnel that only manufacturer certified parts were used for replacement. Used of non-certified parts may result in damages to the projector or hazards such as fire or electric shock. After changing parts, be sure to remind the servicing personnel to perform safety inspections to ensure that the projector operates normally.

Power cord

Don't place the projector where the cord can be walked on. This may result in fraying or damage to the power cord, especially at the plug and the point of connection between the power cord and the projector.

Please use the power cord that comes with the projector or the type of power cord specified for the projector (refer to the descriptions printed on the power cord). If you are not sure of the power available at the region you are in, consult your local power company to prevent damages to the projector due to the use of wrong power cord or potential fire hazards due to current overload.

Depending on the country and region you are in, the voltage and type of socket of the wall outlet may be different from the projector. If you are unable to fit the power plug into the wall outlet, contact your local dealer and do not remove the extra pin on the power plug to forcibly fit it to the socket at the risk of your own safety.

Notices you should read prior to the installation of the projector

Safety issues related to the lamp

The lamp used in this projector contains mercury. Should the lamp be broken, please be careful when handling the glass shards and keep the surrounding environment well ventilated. Be sure to wear a mask that offers adequate protection before cleaning up to prevent inhaling mercury vapor that could cause bodily harm. For instructions on lamp replacement, refer to the chapter "Maintenance & Troubleshooting" → Replacing the Lamp

Take frequent breaks to let your eyes rest

Prolonged viewing of the projector screen could strain your eyes. Please be sure to rest your eyes adequately.

Installation environment for the projector

You should avoid installing the projector at place of excessive dampness, dust or smoke. If installation in such environment is unavoidable, be sure to have the interior of the projector

Warning, Notices and Safety Instructions

cleaned routinely to prolong the projector's lifecycle. Cleaning of the projector's interior should only be performed by qualified service personnel dispatched by your local dealer and you should not attempt to clean the inside of the projector by yourself.

If other light source is directly projected onto the projector screen, the color of the image from the projector will appear to be pale and the image quality will be lower. In addition, your eyes would be more prone to fatigue. Therefore, it is recommended that the projector be installed in places without direct exposure to sunlight or other sources of intense light.


The ideal operating temperature range for the projector is between 32°F ~ 104°F (0°C ~ 40°C)

The ideal storage temperature range for the projector is between -4°F ~ 104°F (0°C ~ 40°C)

Do not tilt the projector more than 15 degrees.

The maximum tilt angle for the projector is 15 degrees.

When the projector is tilted more than 15 degrees, it will shorten the life of the projector lamp and may lead to other unpredictable damages.

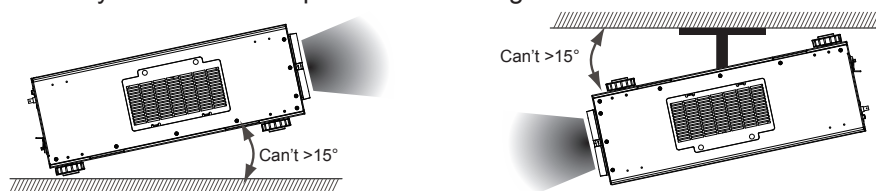

Configurations for projector operation at high altitudes

When operating the projector at higher altitudes, *be sure to manually set the fan mode to "High"* or it could shorten the life of the optical system in the projector. High altitude is defined as places being 1500 meters (4900 feet) or higher.

Please refer to Chapter VI on OSD Menu → Lamps → High Altitude Mode.

Keep the projector's ventilation inlets and outlets free from obstructions

Be sure to keep objects for no less than 30cm away from the ventilation inlets and outlets of the projector and note the direction of air flow at the designated spot of installation. Do not let the hot air released from the outlet flow back to the inlet as it will prevent proper cooling and lead to damage of the projector's internal structure.

In the event of high temperature due to malfunctioning of the internal cooling fan caused by clogging at the ventilation inlets and outlets, the projector will activate its automatic protection mode and shutdown. When this happens, it does not necessary mean that the equipment is malfunctioning. Try to unplug the power cord from the wall outlet and wait for approximately 15 minutes before operating the projector again (remember to remove the objects that have caused poor ventilation so that the projector will not go into the protection mode again). Please refer to the chapter on "LED STATUS".

Description: The regulation of temperature inside the projector by the cooling fan is automatic. And as such, the sound of cooling fan changing its operating speed does not imply that a problem has occurred with the projector.

Protect the projector with care

When placing the projector at a high position, be sure to secure the projector firmly so that it would not fall and cause injuries. Take care to protect the projector's lens from collision, abrasion or other damages. Be sure to close the lens cover or cover the projector with a dust cover if you need to store the projector or if it will not be used for an extended time.

Please refer to below Table for the names and contents of the toxic or hazardous substances or elements contained in electronic information products.

Marking Styles for Names and Contents of Toxic or Hazardous Substances or Elements

Part Name	Toxic or hazardous Substances and Elements					
	Lead (Pb)	Mercury (Hg)	Cadmium (Cd)	Hexavalent Chromium (Cr(VI))	Polybrominated biphenyls (PBB)	Polybrominated diphenyl ethers (PBDE)
Optical Engine (Al or Mg-Alloy)	×	○	○	○	○	○
Len	×	○	○	○	○	○
Lamp	×	×	○	○	○	○
Ballast	×	○	○	○	○	○
Clip (Free cutting Phosphor Bronze)	×	○	○	○	○	○
Fans assy	×	○	○	○	○	○
Lamp cover protected switch	○	○	×	○	○	○
Temperature switch	○	○	×	○	○	○
PCB Assy	×	○	○	○	○	○
Cable	×	○	○	○	○	○
Power Cord	×	○	○	○	○	○
Power Inlet	×	○	○	○	○	○
Metal (Free cutting Phosphor Bronze, Copper nail etc.)	×	○	○	○	○	○
Remote controller	×	○	○	○	○	○

O: Indicates that this toxic or hazardous substance contained in all of the homogeneous materials for this part is below the limit requirement in SJ/T11363-2006.

X: Indicates that this toxic or hazardous substance contained in at least one of the homogeneous materials used for this part is above the limit requirement in SJ/T11363- 2006.

(Enterprises may further provide in this box technical explanation for marking "X" based on their actual conditions.)

2 Projector parts and functions

Front view

Adjustable foot

Adjust the height and angle of the projector with the adjustable foot

Ventilation inlet

The internal cooling fan draws cool air from the ventilation inlet into the projector.

Adjustable foot

Infrared receiver

Lens

Lens cover

Rear view

Ventilation slot

The hot air generated inside the projector is dispersed through the ventilation slot. Make sure the ventilation slot is free from obstruction.

Adjustable foot

Lamp cover

Adjustable foot

Projector buttons

Power inlet

Power switch

I → ON
O → OFF

Infrared sensor

▲▼▶◀ buttons

Use these buttons to scroll, configure or adjust items on the OSD or toggle between different images.

MENU

Displays or hides the OSD adjustment screen

POWER

Displays the projector's power status

ERROR

Displays the cause of problem (i.e. temperature, fan, lamp or system) that has led to projector malfunction.

INPUT

Used to toggle between different input signal source
Refer to Chapter VI → Signal Source Selection for more details

STBY

Use this button to start up or shut down the projector .

STAND BY

The indicator that shows the projector's standby status.

ENTER

Press this button to confirm selection of OSD item; you can choose from "Select Item" or access "Sub Menu" configurations.

IR ext.

Receives input signal from compatible Niles or Xantech IR repeater systems.

12V TRIGGER

(3.5-mm, mini phone jack)
Offers 12 (+/- 1.5) V of output for 350mA monitor relay with short circuit protection.

RS-232

9-pin D-sub socket. Connects your PC or automatic home theater /control system.

10/100 BASE-T

Connects the projector to your PC via network to enable direct control of the projector on your PC.



10/100 BASE-T

S-VIDEO


Standard S-Video input that connects to DVD players, satellite receiver or Super VHS (S-VHS) VCR.

VIDEO

Connects to VCR, laser disc players or other component image sources. Also connects to the composite image synchronized input from RGBS input source.

YUV1

Standard and high definition (480i/480p/576i/576p/720p/1080i/1080p) component input, connects to DVD/HD-DVD/BD player, HD set-top-box or other SD/HD input source. Also connects to RGB input from RGBS input source.

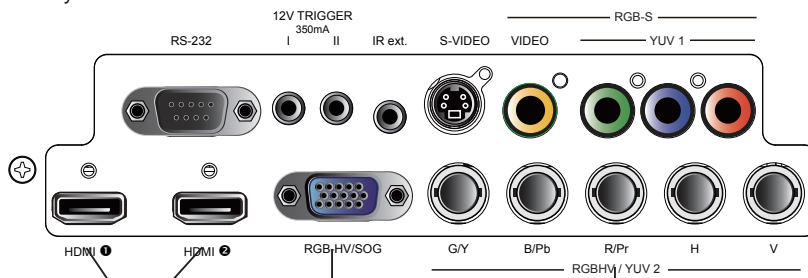

HDMI 1 & 2


HDCP compatible digital image input; connects to sources using HDMI or DVI.

RGBHV/SOG

Standard 15-pin VGA connection socket to connect to RGB, high-definition component input or PC. The projector will automatically detect the resolution of the input signal.

RGBHV/YUV2


Connects to the five BNC inputs for component (YPbPr) image source and channel (Hs, Vs) source.

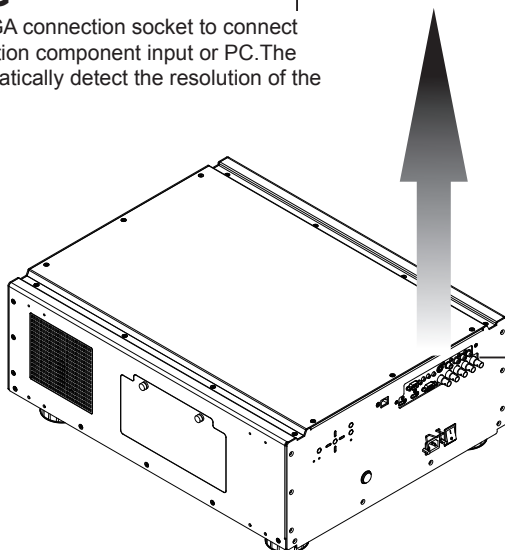

IO Control
(Input/Input control panel)

2 Projector parts and functions

Bottom view


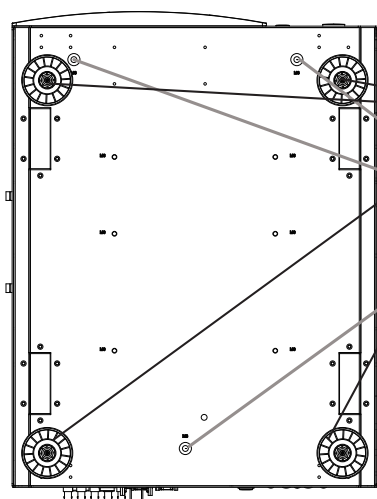


Adjustable foot

Adjust the height and angle of the projector with the adjustable foot

Mounting bracket screw hole

These screw holes are used to mount the projector to its designated mounting bracket using 3 M8x15 screws and 3 M8x40 bolts. The dimensions of the screw holes are shown in the image below.

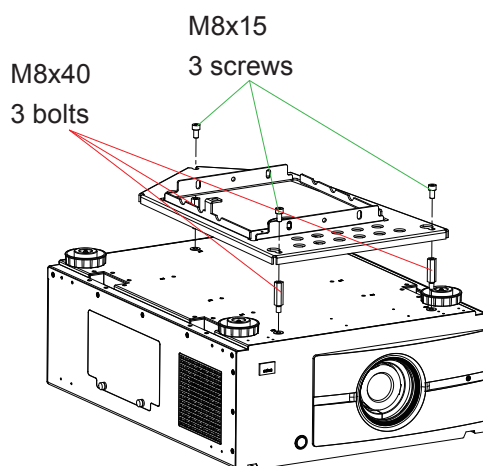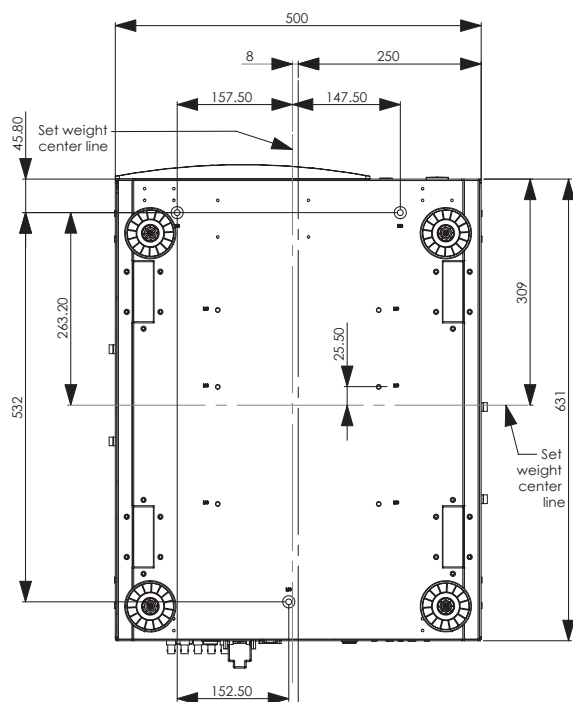


Ceiling Mount Order Info:

1. R9849999-Ceiling mount
2. R9841260-Short Pulley 400mm to 765mm
3. R9841261-Long Pulley 800mm to 1165mm

Range of effective remote control signal reception


The diagram below illustrates the range of effective remote control signal reception.

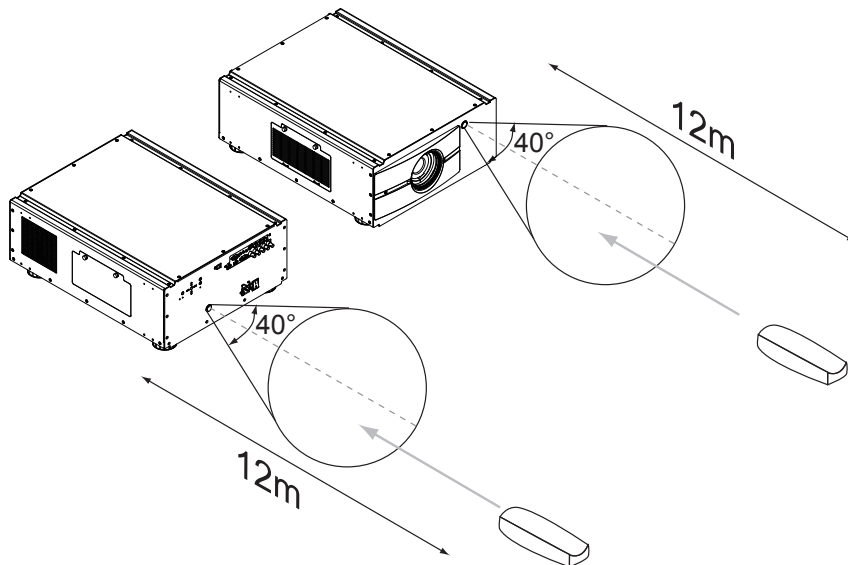


Note: Avoid placing the remote control at places of high temperature or humidity as it could cause the remote control to malfunction.

Installing batteries in the remote control


Remove the cover by sliding it in the direction indicated by the arrow.



Insert two new AA batteries (observe the polarity).



Replace the cover.



Note1: Be sure to insert the batteries in the corresponding orientations to match the polarities.

Note2: Do not mix new batteries with used batteries as it would shorten the life of new batteries or cause leakage.

Note3: Only used AA batteries as instructed; do not attempt to insert different types of batteries into the remote control.

Note4: If the remote is going to be unused for long periods of time, be sure to remove the batteries to prevent leakage, which could damage the remote control.

Note5: The liquid contents in the batteries is harmful to the skin; do not touch the leakage with your bare hands directly. When installing fresh batteries, be sure to clean up the leakage thoroughly.

Note6: Under most circumstances, you only need to point the remote control towards the screen and the IR signal would be reflected off the screen and picked up by the IR sensor on the projector. But under specific circumstances, the projector may fail to receive signals from the remote control due to environmental factors. When this happens, orient the remote control at the projector and try again.

Note7: If the range of effective remote control signal reception decreases or if the remote control stops working, replace the batteries.


Note8: If the infrared receiver is exposed to fluorescent lamp or strong sunlight, the remote control may not operate normally.

Note9: Refer to the regulations enforced by your local government on the disposal of used batteries; improper disposal could damage the environment.


3 Quick installation of the projector

Quick installation of the projector.


1. Orient the projector towards the screen




2. Connect the power cord to the projector

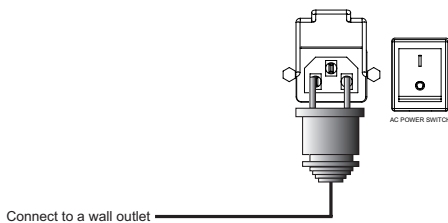

3. Connect the projector to your PC and flip the switch to "I" to turn on the power.

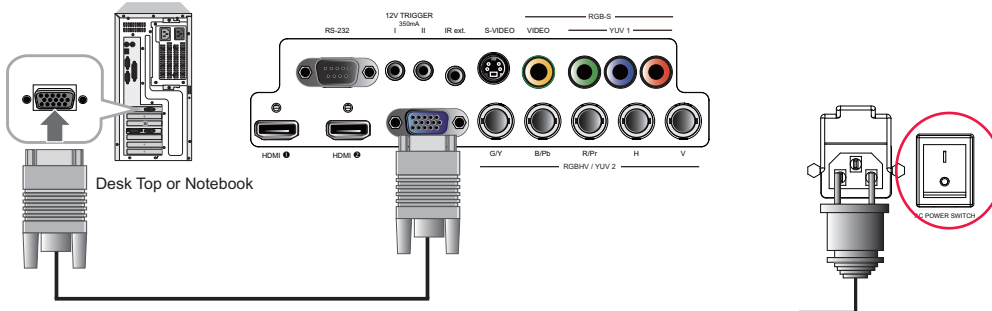


4. Remove the lens cover on the projector before starting it up.

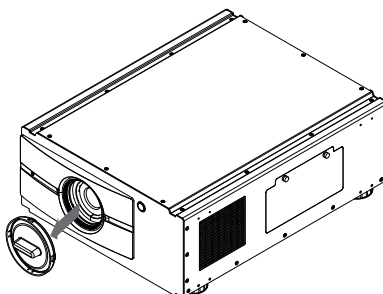

Press the  STBY button on the projector or the  button on the remote control to start up the projector.

5. Adjusting the projector's angle


- Please use the adjustable feet to change the angle of the projector in order to achieve the most suitable angle for projection on the screen.

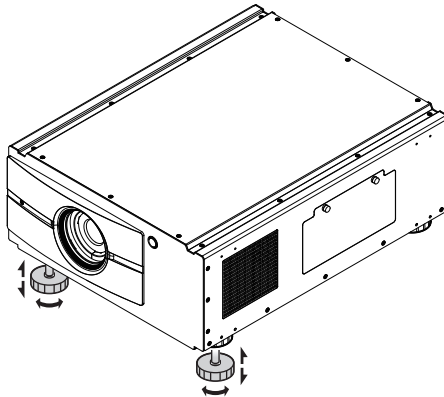


- Adjusting the lens by horizontal and vertical lens shift

Method 1: Press the **ENTER** button on the remote control to access Lens Control adjustment screen before pressing **ENTER** once again to access the menu and use the **▼▲▶◀** buttons to adjust the horizontal or vertical position of the lens.

Press ENTER once to adjust zoom and focus

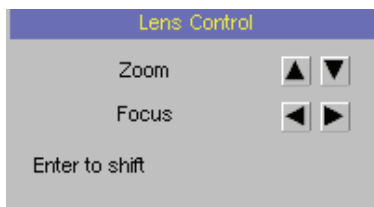

Press ENTER again to adjust vertical and horizontal lens shift

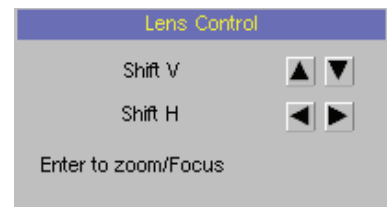

Enter

Method 2: Press the **MENU** button on the remote control and choose Alignment → Lens Control; then use the **▼▲▶◀** buttons to adjust the horizontal or vertical position of the lens.

6. Adjusting focus and zoom.

- Press the **MENU** button on the remote control and choose Alignment → Lens Control; then use the **▶◀** buttons to adjust the lens' focus (clarity).



3 Quick installation of the projector

- b. Press the **MENU** button on the remote control and choose Alignment → Lens Control; then use the ▼▲ buttons to adjust the size of the image that is projected onto the screen.

Original image size



Zoom out



Zoom in



7. Correcting keystoneing caused by projection angle

- a. To adjust horizontal keystoneing, press the MENU button on the remote control and choose ALIGNMENT → Keystone → Horizontal Keystone and use the buttons to ◀▶ adjust the image.



- b. To adjust vertical keystoneing, press the MENU button on the remote control and choose ALIGNMENT → Keystone → Vertical Keystone and use the ▼▲ buttons to adjust the image.




8. Turning off the projector

Press the  **STBY** button on the projector or the  button on the remote control to turn off the projector. When the projector has been turned off, the cooling fan will remain in operation for approximately 90 seconds.

Throw distance

Throw Distance (TD) = Screen Width (W) x Throw Ratio (TR)

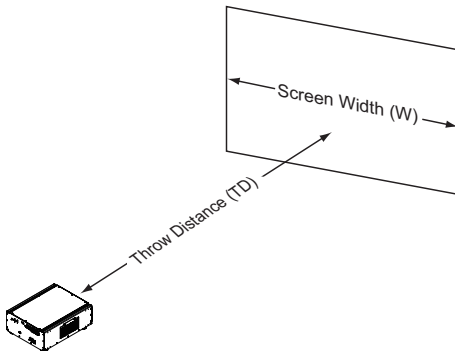

Coupled with the available projection lenses, the projector offers the following throw ratios:

- R9832740-RLD Lens (0.77 : 1)
- R9832741-RLD Lens (1.16 : 1)
- R9832742-RLD Lens (1.45 - 1.74: 1)
- R9832743-RLD Lens (1.74 - 2.17: 1)
- R9832744-RLD Lens (2.17 - 2.90: 1)
- R9832745-RLD Lens (2.90 - 4.34: 1)
- R9832746-RLD Lens (4.34 - 6.76: 1)

Note:

Projection lenses are optional accessories. Please contact your local dealer to acquire the projection lens that suits your need most.


Modes of installation

- Install the projector in an environment below 35°C (95°F). The projector should be kept clear from sources of heat and / or ventilation openings of air conditioner.
- The projector should be kept away from devices that emit electromagnetic energy, such as motor and transformer. Common devices that emit electromagnetic energy include slideshow system, speakers, power amplifiers and elevators.
- If you choose to install the projector on the ceiling, be sure to use the ceiling installation components manufactured by manufacturer-certified vendors. For details, please contact your local dealer.

Frontal projection - desktop installaion

Advantages: easy to install can be easily moved or adjusted easy to operate.

Disadvantage: occupies floor space and limits seating capacity.

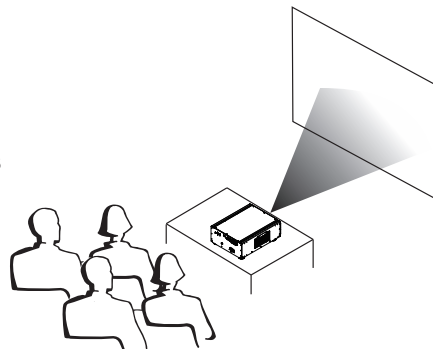


4 Installing the projector

Frontal projection - ceiling mode

Advantage: does not occupy floor space
does not draw attention to it.
Eliminates the possibility that
someone would accidentally
move the projector.


Disadvantage: stricter installation
requirements and conditions;
care should be taken during
the installation to ensure the
projector has been securely
mounted.
operation of the projector
becomes inconvenient without
the remote control.

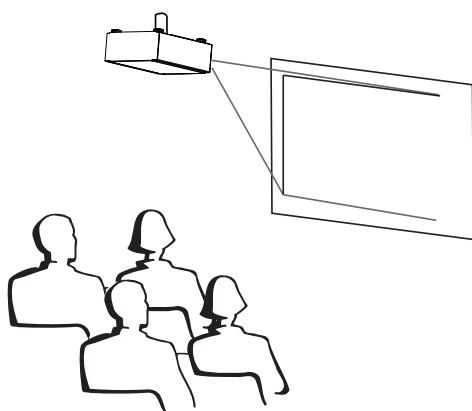

Rear projection - desktop installaion

Advantage: the projector is completely
hidden from plain view
the projector can be easily
operated this setup usually
offers better reduction of ambient
noise.


Disadvantage: requires an additional room
for installation relatively higher
costs for installation.

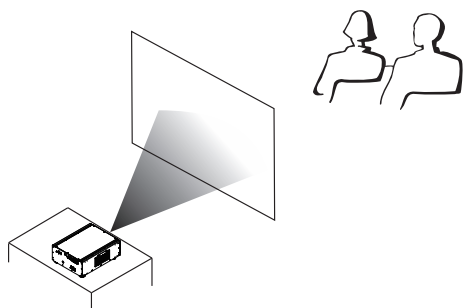

Rear projection - ceiling installation

Advantage: the projector is completely
hidden from plain view this setup
usually offers better reduction of
ambient noise.

Disadvantage: requires an additional room for
installation. Stricter installation
requirements and conditions;
care should be taken during
the installation to ensure the
projector has been securely
mounted. operation of the
projector becomes inconvenient
without the remote control.

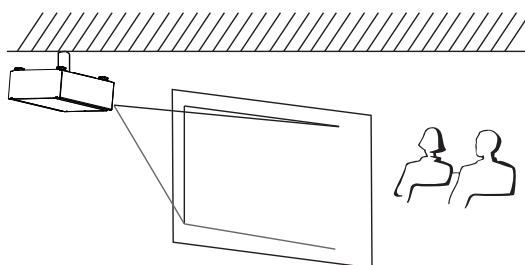


Rear projection - submersive installation

If you wish to have a rear projection setup
with limited space to the rear of the projector,
you can use a mirror to reflect the light
path. However, both the projector and the
mirror have to be precisely located. If you are
considering such installation, please contact
your dealer for assistance.

Advantage: the projector is completely hidden
from plain view
this setup usually offers better
reduction of ambient noise.

Disadvantage: requires an additional room for
installation relatively higher costs
for installation.

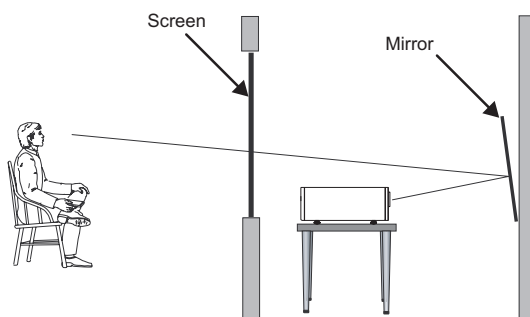


Horizontal and vertical lens shift


In addition to using the adjustable feet to adjust projection angle, you can also use the Lens Shift function to adjust the projected image.

Moving the lens vertically

The distance of vertical lens movement is 100% of half the screen height in both directions. For instance, if you are using a 80" × 50" screen, you will be able to move the image upwards or downwards by no more than 25" (0.635m).

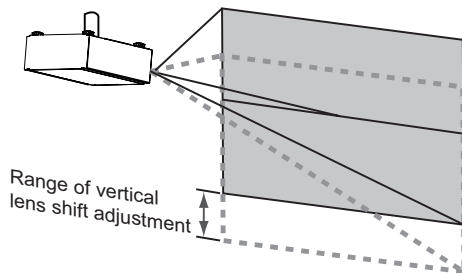


This illustration shows normal vertical lens shift without the use of special specification lens or projector.

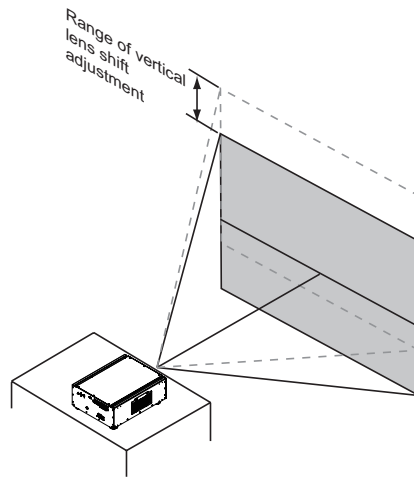

Moving the lens horizontally

The distance of horizontal lens movement is 30% of half the screen width in both directions. For instance, if you are using a 80" × 50" screen, you will be able to move the image left or right by no more than 12" (0.305m).

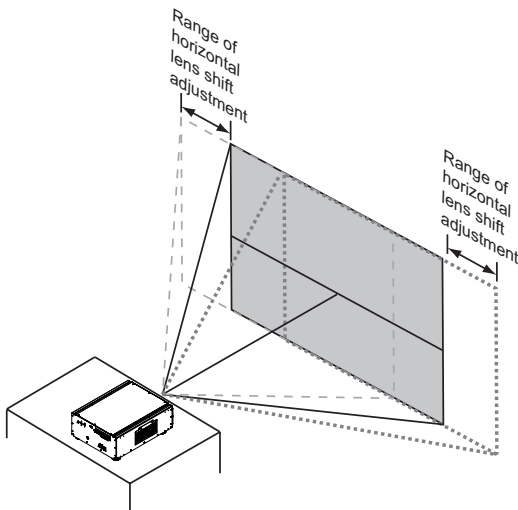

This illustration shows normal horizontal lens shift without the use of special specification lens or projector.


Note: when the lens is in the neutral position (i.e. without horizontal or vertical shift), the center of the projection should be aligned with the center of the screen.

4 Installing the projector

Connecting the projector to other devices

HDMI / DVI connection

Signals from image source offer the best projection image quality when sent through HDMI. Therefore, try to use input devices with HDMI output as the source of image.

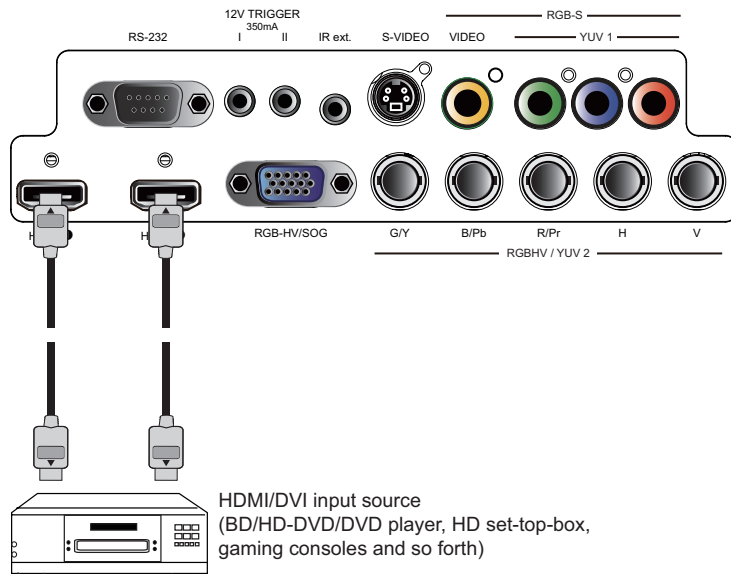


12V Trigger connection

If your home theatre system includes a projector screen, screen cover or other 12V Trigger equipment,



please connect such device/equipment to the projector's 12V Trigger output as illustrated. After you have done so,

Your screen will lower automatically whenever you turn on your projector for your convenience.

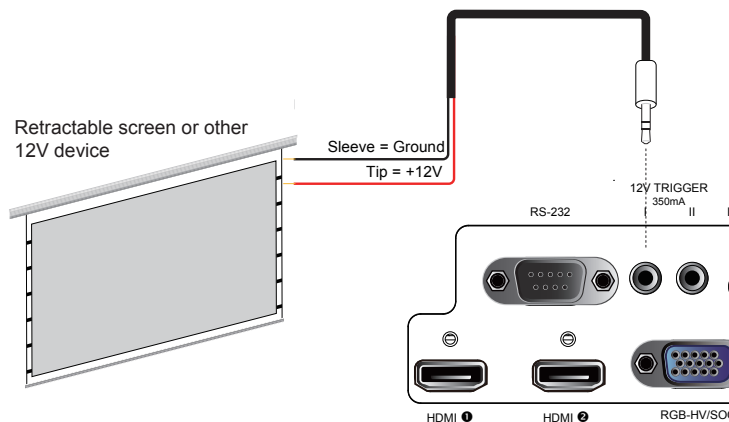

RGB connection


Connect your PC or other devices with RGB output to the RGB input connectors on the projector to be used as the source of image input.

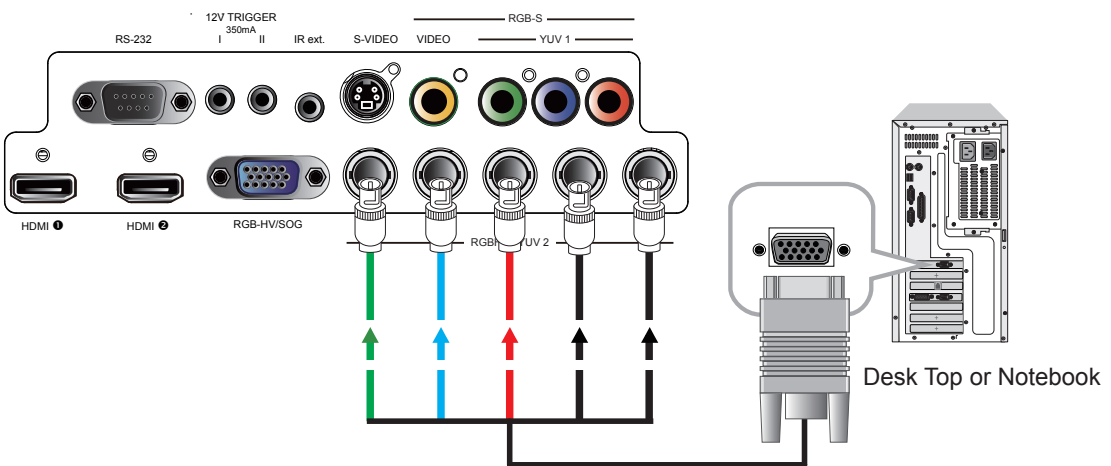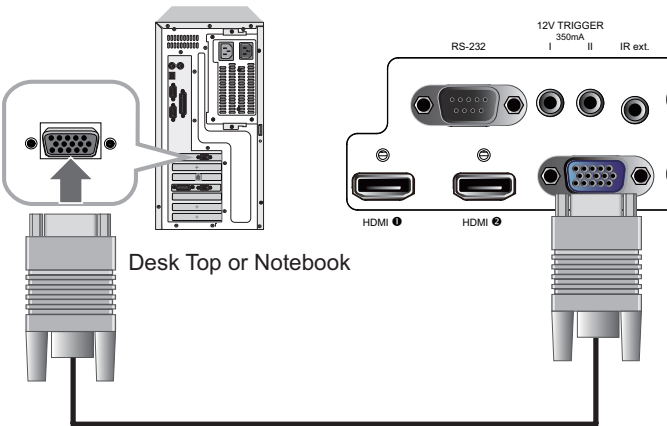

4 Installing the projector


RGBs connection

If the source equipment uses composite image synchronized connectors to output RGB, please connect the green, blue and red connectors to the Y, Pb, Pr jacks at the COMPONENT1/SCART inputs and the synchronized output to the VIDEO jack.

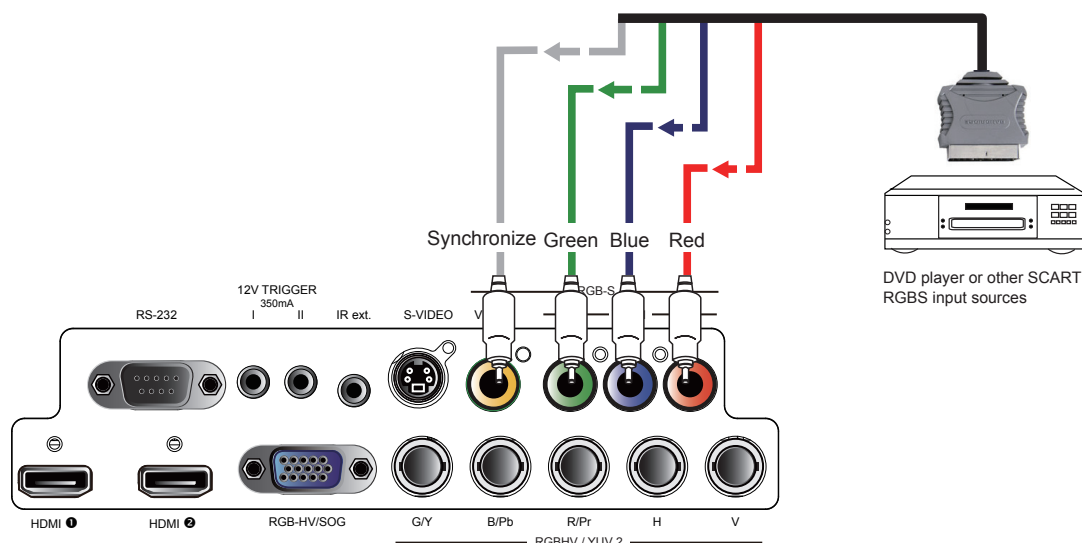


IR INPUT connection

If the projector is unable to pick up the IR signals from the remote control due to distance or obstacles (i.e. wall or cabinet doors), you can connect an external IR repeater to the projector's IR INPUT jack to extend the effective signal reception range.

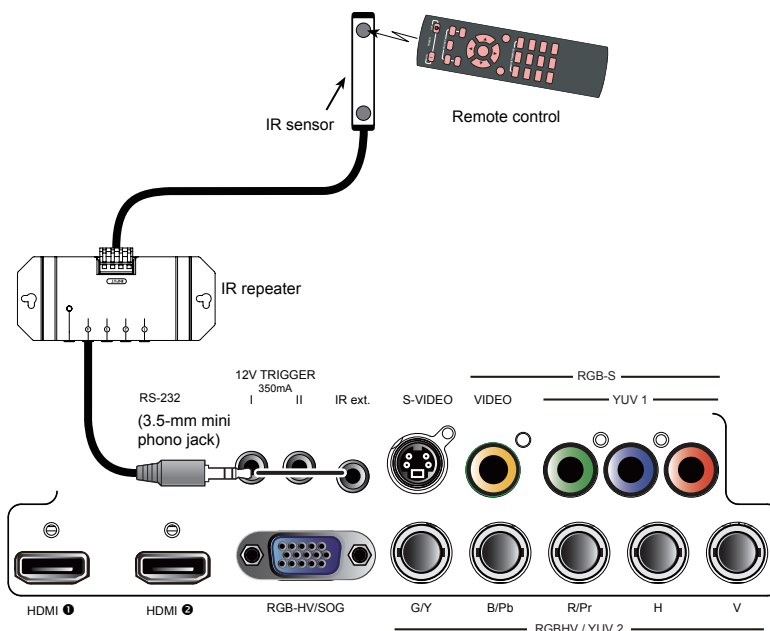


S-Video/Video connection

If the image input device offers both S-Video and Video connection, it is recommended that you choose S-Video to obtain better image quality. If both the S-Video and Video inputs are connected to the projector, the projector will prioritize S-Video signal input and image from the Video input will not be played.

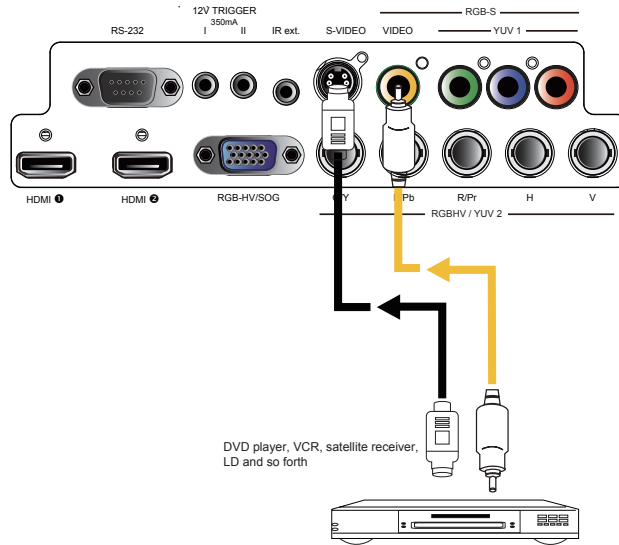

COMPONENT connection

Take the 3/5 cabled RGB component video connectors from the source equipment to the projector's COMPONENT1 SCART or COMPONENT2 jacks.

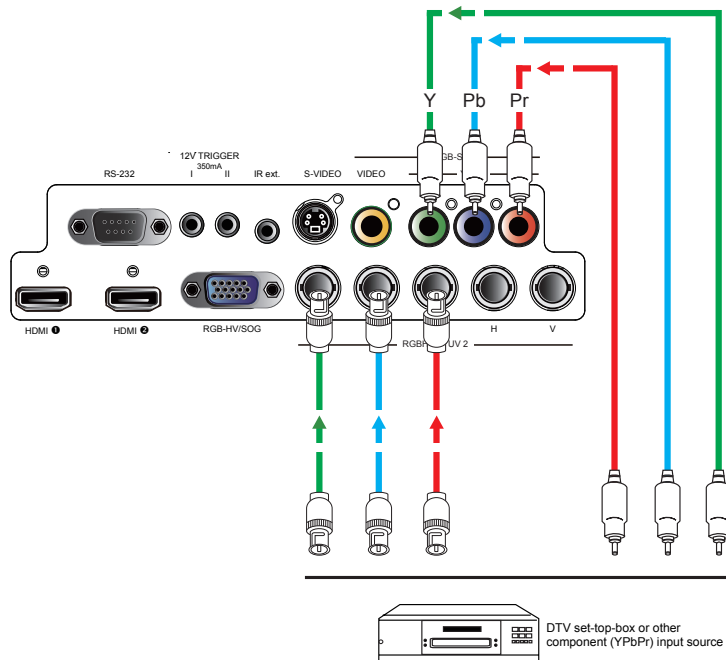

4 Installing the projector

Turning on the projector

Refer to the instructions covered in Chapter III on "Quick installation of the projector".

Changing OSD language

By factory default, the OSD menu of the projector is displayed in English. If you wish to switch to a different language, you can go to **MENU** → **CONTROL** → **Language** and choose the language you prefer for the OSD.

BARCO RLM W6						
INPUT	IMAGE	LAYOUT	LAMPS	ALIGNMENT	CONTROL	SERVICE
		Language		IR Address	< 1 >	
		■ English		Eco Network Power	< Off >	
				Projector Control	< Network >	
		Français		Network	Enter	
		Español		Menu Position	< Center >	
		Deutsch		Start Up Logo	< On >	
				Start Up Chime	< On >	
		Português		Button 1	Enter	
		简体中文		Button 2	Enter	
				Button 3	Enter	
		繁體中文		Button 4	Enter	
				Button 5	Enter	
		日本語		Trigger 1	< Auto >	
		한국어		Trigger 2	< 16:9 >	
				Auto Source	< On >	
				Language	Enter	

Adjusting screen orientation



By default, the projector is configured for "frontal projection - desktop installation". If you choose to install your projector in other setups, be sure to adjust the screen orientation to achieve the correct projection mode.

BARCO RLM W6						
INPUT	IMAGE	LAYOUT	LAMPS	ALIGNMENT	CONTROL	SERVICE
				Rear Projection	< Off >	
				Ceiling Mode	< Off >	
				Lens Control	Enter	
				Keystone	Enter	
				Dynamic Contrast	< Off >	
				Gamma	< 2.2 >	
				Internal Patterns	Enter	
				Color Space	< Native >	
				Lens To Midposition	Execute	

Frontal projection - ceiling mode

Press **MENU** → **ALIGNMENT** → **Ceiling Mode** and choose ON; the projector is now configured for "frontal projection - ceiling mode".

Correct Picture

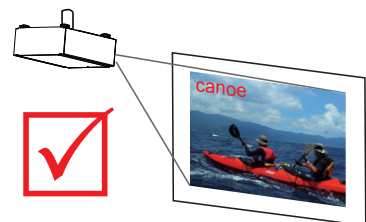
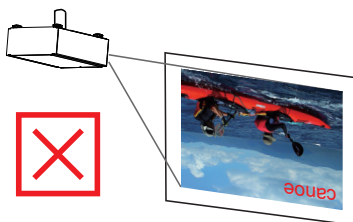


4 Installing the projector

Rear projection - desktop installaion

Press **MENU** → **ALIGNMENT** → **Rear Projection** and choose **ON**; the projector is now configured for "rear projection - desktop installation".



Correct Picture

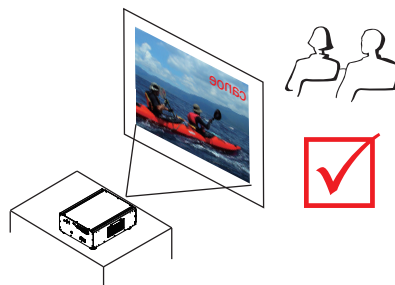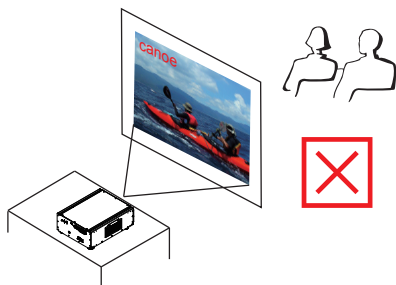

Rear projection - ceiling mode


Press **MENU** → **ALIGNMENT** → **Rear Projection** and choose **ON**;
press **MENU** once more → **ALIGNMENT** → **Ceiling Mode** and choose **ON**

Correct Picture

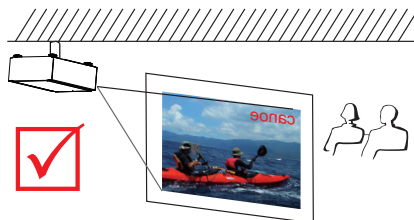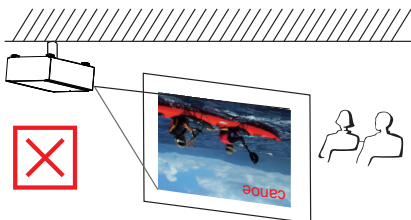

Adjusting the projector lens

Projector lens adjustment includes focus, zoom, horizontal/vertical image shift. Please refer to Chapter III on "Quick installation of the projector > Adjusting projector angle, Adjusting projector focus/zoom, Correcting keystoneing caused by projection angle" for detailed instructions.

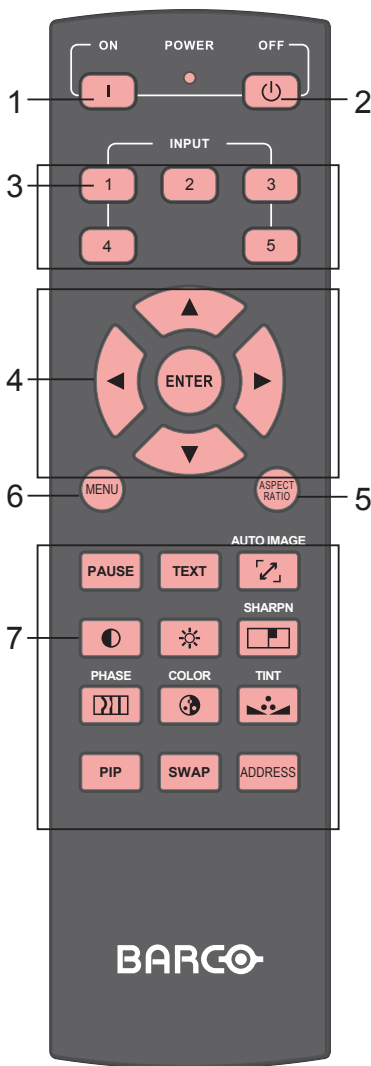

1. **ON**
This button is used to turn on the projector.
2. **OFF**
This button is used to turn off the projector.
3. **1 2 3 4 5**
These buttons on the remote control are the hotkeys for different image source. By factory default, these are:
1 = HDMI 1
2 = RGB D-15
3 = RGBHV/YUV2
4 = YUV1
5 = Composite Video

You can configure the input source that corresponds to each button in the OSD Menu. To do so:

When press **MENU** > **CONTROL** > Button 1~5; use the **▼ ▲** buttons to choose from different sources of input. You can choose from: HDMI 1, HDMI 2, RGB D-15, YUV 1, RGBHV/YUV 2, Composite Video, S-Video and RGB-S.

For example, if you have configured **1** as RGB D-15 in the OSD Menu, when you press **1** on the remote control, the projector will display the image from RGB D-15.

4. ▼ ▲ ◀ ▶

Use these buttons to make your selection or configure, adjust configuration or toggle between image displays.

ENTER

Use this button to select items in the menu or confirm the settings you have changed. When press ENTER, You also recall LENS ADJUST when menu is off.

5. ASPECT RATIO

You can scroll through different aspect ratios by pressing this button repeatedly. For more information, refer to Chapter VI (OSD Menu → Aspect Ratio).

6. MENU

Press this button to show or hide the OSD Menu.

Various image adjustment buttons

PAUSE PAUSE

Use this button to halt projection temporarily.

TEXT TEXT

When TEXT is set to ON, the user will be able to operate the OSD Menu normally. When TEXT is set to OFF, only ON, OFF, 1~5, SWAP, PIP, PAUSE will function normally; pressing any other buttons will not access the OSD Menu.

5 Using the remote control

AUTO IMAGE

This button is used to Resync the image; when the image signal becomes unstable or image quality deteriorates simply press this button and the projector will automatically adjust the screen dimension, phase, timing and so forth. (The adjustments also apply to PIP input).

CONTRAST

Adjust the level of white in the image to increase or decrease image contrast.

BRIGHTNESS

Adjust the level of black in the image to increase or decrease image brightness.

SHARPNESS

Adjust image sharpness and clarity.

PHASE

When the image flickers, doubles, distorts or appears to be wavy, press this button to adjust.

COLOR

Adjust the image's color saturation. When oversaturated, the colors in the image will appear to be very bright and vivid; on the other hand, if colors are undersaturated, the image will appear to be washed out.

TINT

This button only works for video signals input through the Video and S-video ports. By pressing this button, you can adjust the ratio of magenta and green in the image; lowering this setting will make the image appear more magenta, while increasing this setting will make the image appear more green.

PIP

Use this button to display or disable PIP.

SWAP

Use this button to switch the sources of image PIP display.

ADDRESS

Only 2 addresses are possible

Press and hold the **ENTER** button and press this button until the remote control panel flashes once (approximately 5 seconds) to change the receiving address of the remote control. If you use one remote control to operate two different projectors, you can assign different address for the two projectors so that when you operate projector A, projector B will not be affected.

OSD Menu Tree

Tree

INPUT	Input Selection	HDMI1 HDMI2 RGB D-15(RGB-HV/ SOG)YUV1(RGB-S) RGBHV/YUV2 Composite Video(Video) S-Video RGB-S
	Input Locking	Auto 48Hz, 50Hz, 60Hz
	Auto Power Off	On Off
	Auto Power ON	On Off
	No Signal	Logo Blue Black White
	Video Standard	Auto PAL, SECAM, NTSC
	Auto Image Adjust	Off, Auto Always
IMAGE	Contrast	0~200
	Brightness	0~200
	Saturation	0~200
	Tint	0~200
	Sharpness	0~200
	Noise Reduction	0~200
	Color Temperature	3200K, 5400K, 6500K, 9300K, Native
	Input Balance	Black Balance Offset Red Offset Green Offset Blue Offset White Balance Red Gain Green Gain Blue Gain
	Aspect Ratio	5:4 , 4:3, 16:10 16:9, 1.88, 2.35 Letterbox, Native
	Timings	H Total H Start H Phase V Start
	Auto Image	Execute

LAYOUT	Zoom	Off Crop Zoom
	Main Select	HDMI1 HDMI2 RGB D-15(RGB-HV/ SOG)YUV1(RGB-S) YUV2(RGBHV/YUV2) Composite Video(Video) S-Video RGB-S
	PIP Select	HDMI1 HDMI2 RGB D-15(RGB-HV/ SOG)YUV1(RGB-S) YUV2(RGBHV/YUV2) Composite Video(Video) S-Video RGB-S
	PIP Position	Top Left Top Right Bottom Left Bottom Right Split L-R
	PIP	On, Off
LAMPS	Mode	Eco Normal Power
	LAMPS	Single Dual
	High Altitude Mode	On Off
	Power	0~22
	Lamp1 Status	On Off
	Lamp2 Status	On Off
	Lamp1 Run Time	XX HRS
	Lamp2 Run Time	XX HRS

6 OSD Menu description

ALIGNMENT	Rear Projection	On Off
	Ceiling Mode	On Off
	Lens Control	Zoom/Focus Shift
	Keystone	Horizontal Keystone Vertical Keystone
	Dynamic Contrast	On (1~12 Pattern) Off (0 off)
	Gamma	1.8 2.0 2.2 2.35 2.5
	Internal Patterns	On Off
	Color Space	Native, EBU, SMPTE Custom
	Lens To Midposition	Execute
Control	IR Address	1 2
	Eco Network Power	On Off
	Projector Control	RS-232 Network
	Network	IP Address Subnet mask Gateway DHCP (these are read-only information)
	Menu Position	Top Left Top Right Bottom Left Bottom Right Center
	Start Up Logo	On Off
	Start Up Chime	On Off
	Button 1	HDMI1
	Button 2	HDMI2
	Button 3	RGB D-15(RGB-HV/ SOG)YUV1(RGB-S)
	Button 4	YUV2(RGBHV/YUV2)
	Button 5	Composite Video(Video) S-Video
	Trigger 1	5:4 , 4:3, 16:10
	Trigger 2	16:9, 1.88, 2.35 Letterbox, Native, Auto
	Auto Source	On Off

Control	Language	English French Spanish German Portuguese Chinese Simplified Chinese Traditional Japanese Korean
Service	Model	Read-only information
	Serial Number	
	Software Version	
	Active/PIP source	
	Pixel Clock	
	Signal Format	
	H/V Refresh Rate	
	Lamp1 Run Time	
	Lamp2 Run Time	
	Lamp Hour Reset	Lamp1 Hour Reset Lamp2 Hour Reset
	Projector Run Time	Read-only information
	Blue Only	On Off
	Factory Reset	The command will be executed after confirmation in the prompt dialog box

OSD Description

1. Press the MENU button on the remote control or on the back of the projector to bring up the OSD Menu.
2. You will see seven functional menus (Input, Image, Layout, Lamp, Alignment, Control and Service). Press ◀ or ▶ to select the desired sub menu.
3. Press ▲ or ▼ to select the desired sub menu.
4. Your current selection in each of the sub menu will be displayed in yellow text and highlighted in blue. Press ◀ or ▶ to access the configuration for the selected item or press ENTER to go to another sub menu.
5. Press **MENU** to return to the previous menu.
6. From the main menu, press **MENU** to close the OSD Menu.

INPUT

BARCO RLM W6						
INPUT	IMAGE	LAYOUT	LAMPS	ALIGNMENT	CONTROL	SERVICE
Input Selection		Enter				
Input Locking	<	Auto	>			
Auto Power Off	<	Off	>			
Auto Power On	<	Off	>			
No Signal	<	Logo	>			
Video Standard	<	Auto	>			
Auto Image Adjust	<	Always	>			

Input Selection

Use this function to specify the source of image connected to the rear of the projector. For instance, if you have connected your PC as the video input source, you can choose RGB D-15(RGB-HV/SOG) to be the input for image projection.

Options of input available on the projector include: **HDMI1**, **HDMI2**, **RGB D-15(RGB-HV/SOG)**, **YUV1(RGB-S)**, **YUV2(RGBHV/YUV2)**, **Composite Video(Video)**, **S-Video**, **RGB-S**.

Input Locking

Use this function to specify the frequency of the image input signal. You can let the projector determine the optimal projection frequency or force the projector to project image at the frequency you specify.

- **Auto**

The preset value for this function is **Auto**. If you specify vertical refresh frequency from the input device to be between 48~62Hz, the projector will automatically lock the frequency of the input signal so that both signal input and output will be refreshed at the same

6 OSD Menu description

frequency in order to achieve optimal image output. If the frequency of the input signal falls between 24~31Hz, the projector will automatically double the vertical refresh frequency. If the frequency of the input signal falls between 31~48Hz or exceeds 62Hz, the projector will automatically set the frequency to 60Hz.

- **50Hz**
Choose this option to set image output frequency at 50Hz.
- **60Hz**
Choose this option to set image output frequency at 60Hz.

Note: If you enable PIP, the projector will automatically synchronize the frequency of the PIP input signal with the main input signal.

Auto Power Off

The default value is **OFF**. If you set it to **ON**, the projector will automatically shut down after 20 minutes without input signal.

Auto Power ON

The default value is **Off**. If you set it to **ON**, the projector will automatically start up when it is connected to AC power. If you plug the projector's power cord into an AC socket with a switch, you can use this function to start up the projector using the socket's switch instead of the remote. If you do not need this function, please set it to **Off**.

No Signal

Use this function to specify the content or color to be displayed on the blank screen when no input signal is available. You can choose from **Logo**, **Blue**, **Black**, **White**. The default value is **Logo**.

Video Standard

Different countries may use different video signal formats. Please choose the video standard in your area.

- **Auto**
This is the default value. The projector will automatically determine the video standard used in your area.
- **PAL** (Phase Alternation By Line)
A video standard with 625 scan lines / 25 frames per second developed by Germany. The PAL system is used in Germany, Great Britain, South America, Australia, China and many Western European nations and Asian countries.
- **SECAM** (Sequential Color With Memory)
A video standard with 625 scan lines developed by France. Areas including former East Germany, Czechoslovakia, Egypt, Poland and etc. use the SECAM standard.
- **NTSC** (National Television Systems Committee)
A video standard with 525 scan lines per frame developed by the National Television Systems Committee of U.S.. The NTSC standard is primarily used in the U.S., Japan, Canada and Mexico.

Note: Generally speaking, the projector will be able to automatically detect the video standard used in your area. However, there are circumstance where the projector will fail to interpret the video standard used and the user will have to manually configure the video format. If you are unsure of the video standard used in your area, please contact a qualified personnel and inquire about the video standard used in your area.

Auto Image Adjust

You can configure the Auto Image Adjust function to one of the following three modes:

- **Off** =NEVER
- **Auto** =When not done before(or when done first time)
- **Always** =When new source selected or new source connected.

For more information on Auto Image Adjust, refer to Chapter VI → Image → Auto Image.

IMAGE

BARCO RLM W6						
INPUT	IMAGE	LAYOUT	LAMPS	ALIGNMENT	CONTROL	SERVICE
	Contrast	<	100	>		
	Brightness	<	100	>		
	Saturation	<	100	>		
	Tint	<	100	>		
	Sharpness	<	0	>		
	Noise Reduction	<	0	>		
	Color Temperature	<	Native	>		
	Input Balance		Enter			
	Aspect Ratio	<	Native	>		
	Timings		Enter			
	Auto Image		Execute			

Contrast

Use ◀▶ to adjust the contrast of the projected image. You can connect the projector to an external image source to display an image resembling the one shown below for adjustment. It is recommended that you adjust the projected image according to the results shown below so that the brightness of the spectrum remains constant throughout and achieve maximum contrast between black and white.



The following image illustrates the results of direct contrast adjustment using a random image:

◀ Lowered contrast



Original image



Enhanced contrast ▶



6 OSD Menu description


Brightness

Use ◀▶ to adjust the brightness of the projected image. You can connect the projector to an external image source to display an image resembling the one shown (PLUGE, Picture Line-Up Generation Equipment) for adjustment. Although there are numerous versions of PLUGE image, they are typically comprised of blocks of black, white and gray on top of a black background.

It is recommended that you adjust the image to the following status:

- The darkest black bar of the image should disappear into the background.
- The dark gray area should be barely visible.
- The light gray area should be clearly visible.
- The white area should appear real and mellow.
- The image should only display black, gray and white (with no other colors).

Contrast, Brightness, Saturation and Tint are interrelated options that affect one another; when you adjust one of them, you might have to fine tune other settings to get the best projection results.

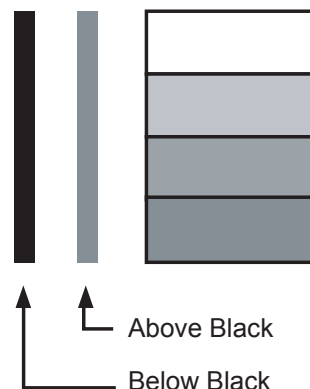

The following image illustrates the results of direct brightness adjustment using a random image:

◀ Reduced brightness



Original image



Enhanced brightness ▶



Saturation

Use ◀▶ to adjust the saturation of the projected image. If the color of the projected image seems to be overly bright and vivid, decrease color saturation; if the color seems white and washed out, increase color saturation.

◀ Reduced saturation



Original image



Enhanced saturation ▶



Tint

Use ◀▶ to adjust the tint (balance between magenta and green) of the projected image. Lowering the value will make the image appear redder; increasing the value will make the image appear greener.

◀ Reduced tint



Original image




Enhanced tint ▶



Sharpness

The adjustment of sharpness primarily changes the value of high frequency detail. You can connect the projector to an external image source to display an image resembling the one shown below to adjust the image sharpness.

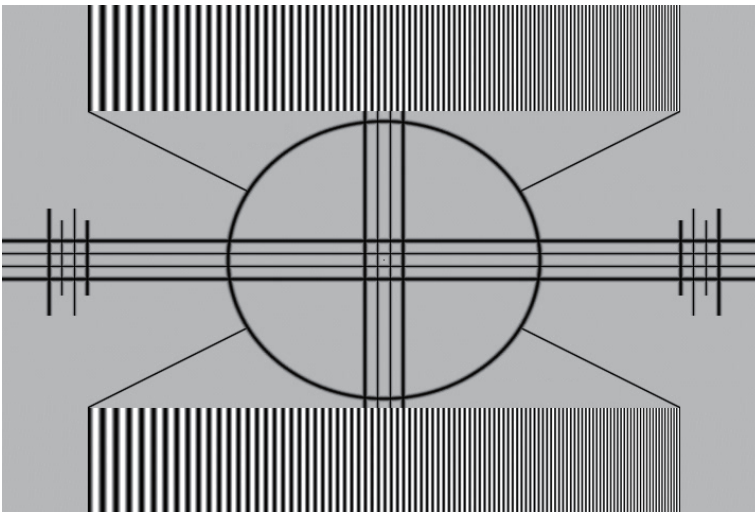

The following image illustrates the results of direct sharpness adjustment using a random image:

◀ Reduced sharpness



Original image




Enhanced sharpness ▶



6 OSD Menu description

Noise Reduction

Use ◀▶ to adjust the noise of the projected image. This function is suitable for the elimination of image noise from interleaving SD input. Generally speaking, reducing image noise will lower the value of high frequency detail and make the image appear more mellow.

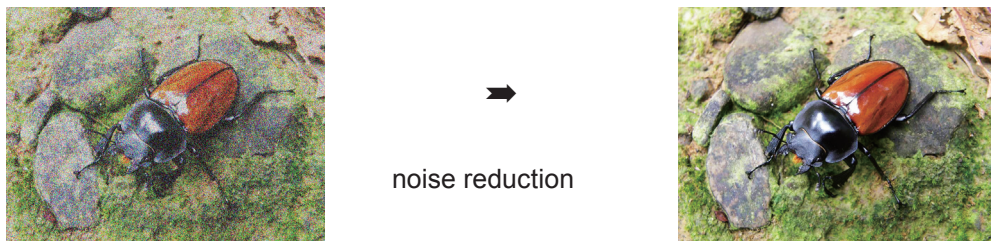

Color Temperature


You can choose from **3200K**, **5400K**, **6500K**, **9300K** and **Native**.

Color temperature refers to the change in light color under different energies that is perceived by the naked eye. The change of color temperature from low to high for visible light goes from orange red → white → blue.

The projector's default color temperature is set at 6500K and it is suitable for most situations. As color temperature rises, the image will appear to be more blue; as it decreases, the image will appear redder. When you choose "Native", the projector will disable the white adjustment function of the input device.

Input Balance

Regardless of the change in ambient light, the human eye is equipped with an automatic adjustment mechanism that makes a white object appears white and black object black. However, since no machine has such an incredible innate feature, you may need to make certain adjustments to the projector's settings when the ambient light changes so that the image will appear closer to the actual colors.

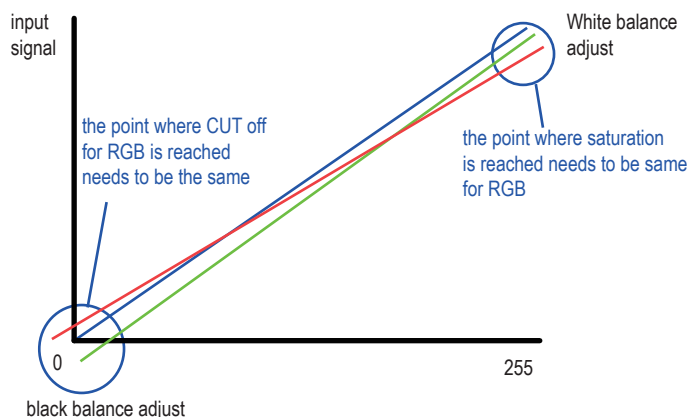

Offset

This refers to the control of color imbalance in the darker areas of the projected image. It is recommended that you use an external test image with many areas of dark and gray colors (i.e. an image of 30IRE-window). If you notice minimal amount of red, green or blue in the gray areas, adjust the offset of the corresponding color accordingly. This function will shift the entire color spectrum for the whole image and change its brightness.

Gain

This refers to the control of color imbalance in the brighter areas of the projected image. It is recommended that you use an external test image with many areas of white (i.e. an image of 80IRE-window). If you notice minimal amount of red, green or blue in the gray areas, lower the gain of the corresponding color accordingly. This function is used to increase or decrease the range of color input for the entire image.

Generally speaking, as gain increases, the contrast of the image will become lower. By increasing the offset, the image brightness will become lower.

- **Black Balance Offset**

This function involves the adjustment of the following red, green and blue offsets. The text itself is decorative.

- **Red Offset**

Press ◀▶ to adjust the offset of red in dark scales.

- **Green Offset**

Press ◀▶ to adjust the offset of green in dark scales.

- **Blue Offset**

Press ◀▶ to adjust the offset of blue in dark scales.

- **White Balance**

This function involves the adjustment of the following red, green and blue gains. The text itself is decorative.

- **Red Gain**

Press ◀▶ to adjust the gain of red in bright scales.

- **Green Gain**

Press ◀▶ to adjust the gain of green in bright scales.


- **Blue Gain**

Press ◀▶ to adjust the gain of blue in bright scales.


Aspect Ratio

Use this function to adjust the aspect ratio of the projected image. Use ◀▶ to adjust the ratio of image length and width.

The projector's full image size is 16:10 (1920×1200 dots). The following diagram illustrates the difference in various aspect ratio settings:

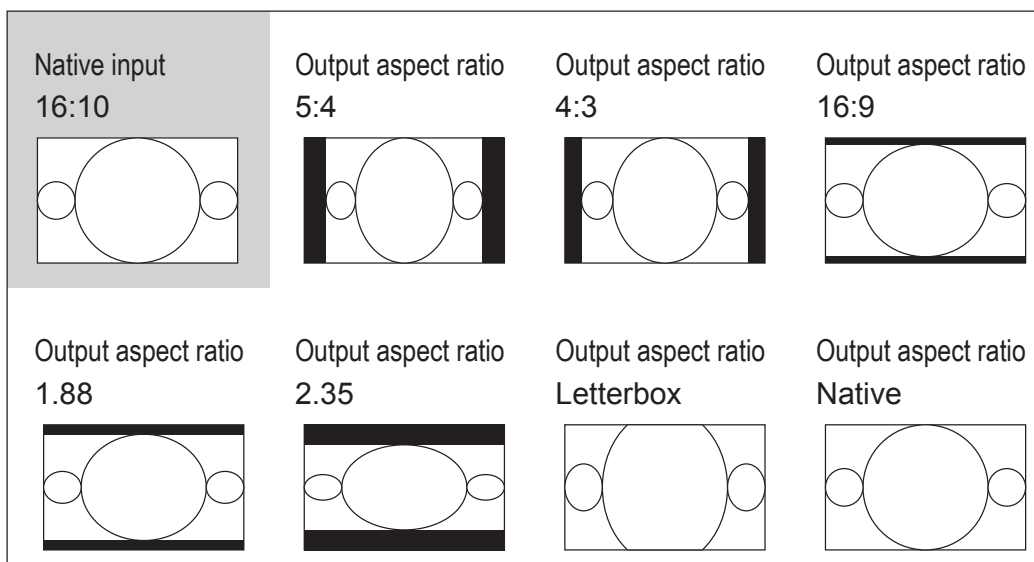

6 OSD Menu description

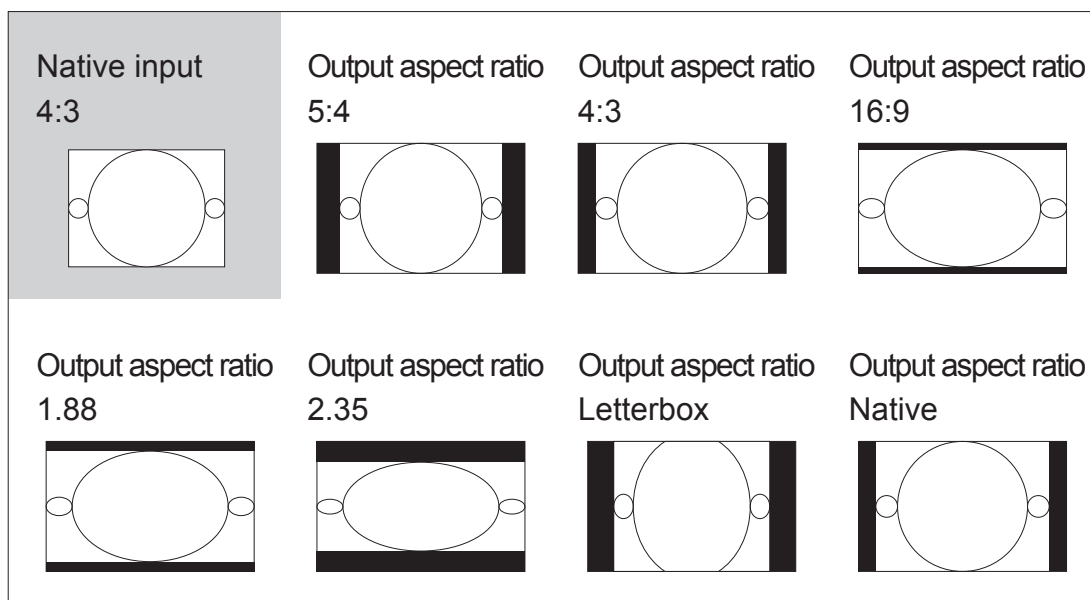

Note that when used for commercial purposes, including: projection of image in movie theatres, hotels, cafeteria and other public venues, compression or extension of image achieved through the change of aspect ratio may constitute copyright infringement to the rightful owner of the image. Please do so at your own discretion.


Timings

• H Total

Press ◀▶ to adjust the horizontal total.

Use this function to adjust the clock frequency of pixel sampling (horizontal pixel frequency of the analog input source generated by the ADC). If you notice flickering or verticle lines in the image, it means that the pixel sampling frequency is insufficient. You can use this function to adjust the frequency to achieve consistent image quality.

The following image is an example of test image from an external signal source:

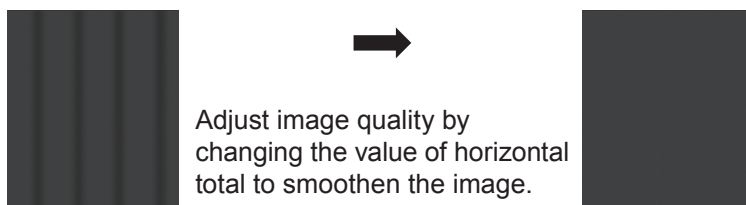


In order to adjust timings the pattern should be used is pixel (on/off)

• H Start


Use ◀▶ to adjust the projected image's horizontal position.

If the projected image is not at the center of the screen (i.e. shifted to right or left) and ends up being cropped, use this function to adjust the image's horizontal position. The following image is an example of test image from an external signal source:


Native picture



Skewed left



Skewed right



• H Phase

Use ◀▶ to adjust the projected image's phase.

Use this function to adjust the phase of pixel sampling clock (relative to input signal).


Should the image still flicker or show noise (i.e. edges on texts) after optimization, adjust phase accordingly.

• V Start


Use ◀▶ to adjust the projected image's vertical position.

If the projected image is not at the center of the screen (i.e. shifted up or down) and ends up being cropped, use this function to adjust the image's vertical position. The following image is an example of test image from an external signal source:


Native picture



Skewed down



Skewed Up



It is recommended that when adjusting the image, the horizontal total should be adjusted before the horizontal phase. However, if the image still flickers even after you have adjusted both, try lowering the image noise.

Auto Image

When Auto Image was selected in the OSD menu, press **ENTER** to execute the automatic image adjustment function.

By executing this function, the projector will resync the image. Use this function when the image source is unstable or when you notice deterioration in image quality and the projector will automatically adjust the image size, phase and timing. (The adjustment also applies to PIP input source).

This function is identical to the  button on the remote control. You can simply use the hot key on the remote control to execute this function.

6 OSD Menu description

LAYOUT


BARCO RLM W6						
INPUT	IMAGE	LAYOUT	LAMPS	ALIGNMENT	CONTROL	SERVICE
		Zoom		< Off >		
		Main Select		Enter		
		PIP Select		Enter		
		PIP Position		< Top Left >		
		PIP		< Off >		

Zoom

Due to the fact that some consumers may still be using older television systems, some TV programs may not display the edges of the image. Use this function to hide the image edge by choosing one of the following three options:

- **Off**
Setting it to off makes no change to the projected image.
- **Crop**
Setting it to "Crop" will add two "masks" equivalent to 3% of horizontal resolution on either side of the image and two similar masks above and below the projected image.
- **Zoom**
You can use this function to enlarge the image's horizontal resolution over the 106% of the default aspect ratio. Any portion that exceeds the original image will be cropped.

When you set aspect ratio to "Native", be sure to set Zoom to "Off" or "Crop".

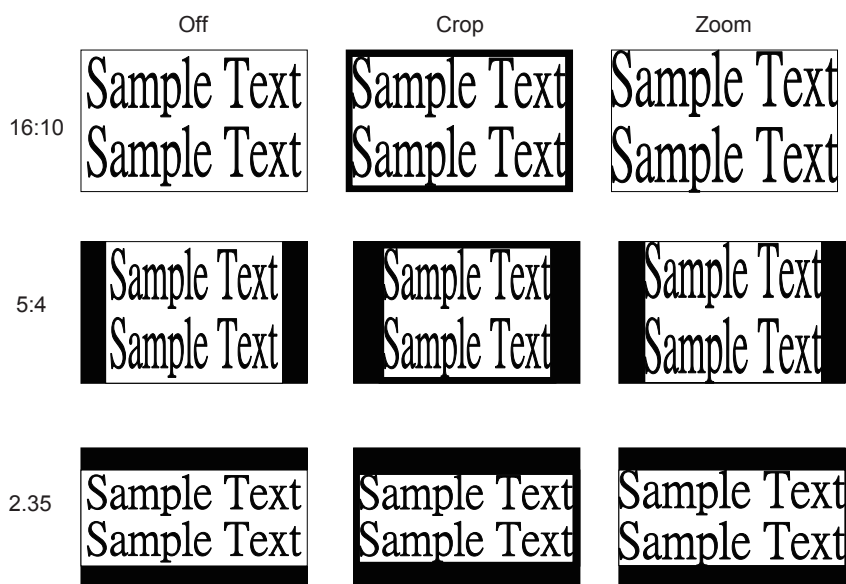

Main Select

When you want to project PIP image, use this function to specify the image source for the PIP image. This function is identical to Input Selection; for more information, please refer to the section on Input Selection.

PIP Select

Use this function to select the source for the sub window.

You can choose from HDMI1, HDMI2, RGB D-15(RGB-HV/SOG), YUV1, RGBHV/YUV2, Composite Video(Video), S-Video, RGB-S and so forth.

Sub picture Main picture



PIP Position

You can choose to display sub window in five different location over the main picture according to your preference.

Top Left



the

Top Right



Split L-R



Bottom Left



Bottom Right



PIP

If you wish to display PIP image, you can make the configuration here. By choosing "ON", you will see two windows on the projected image; the larger one is the primary image and the smaller one is the sub image. By choosing "OFF", the PIP function will be disabled and you will only see a single image window.

please refer to the following main and PIP source matrix for a valid main and PIP source selection when PIP is ON.

		Main Select							
		HDMI1	HDMI2	RGB D-15	YUV1	RGBHV/ YUV2	Composite Video	S-Video	RGB-S
PIP Select	HDMI 1		—	O	O	O	O	O	O
	HDMI 2	—		O	O	O	O	O	O
	RGB D-15	O	O		—	—	O	O	O
	YUV 1	O	O	—		—	O	O	—
	RGBHV/ YUV 2	O	O	—	—		O	O	—
	Composite Video	O	O	O	O	O		—	—
	S-Video	O	O	O	O	O	—		—
	RGB-S	O	O	O	—	—	—	—	

O mean Source Available ; — mean NA

LAMP

BARCO RLM W6						
INPUT	IMAGE	LAYOUT	LAMPS	ALIGNMENT	CONTROL	SERVICE
			Mode	<	Normal	>
			Lamps	<	Dual	>
			High Altitude Mode	<	Off	>
			Power	<	—	>
			Lamp1 Status :		On	
			Lamp2 Status :		On	
			Lamp1 Run Time :		1222HRS	
			Lamp2 Run Time :		1222HRS	

This chapter covers information on the projector lamp.

Mode

- ECO**

When set to Eco mode, the wattage of the lamp will be at 230W. If the surrounding environment is sufficiently dark or if you do not require intense brightness, you can set the lamp to Eco mode to prolong its usage life.

- Normal**

When set to Normal mode, the wattage of the lamp will be at 280W. If the projection environment requires brighter image, you can set the lamp to Normal for the highest projection brightness.

- Power**

If the image brightness at Eco mode is too dark for you and the Normal mode gets too bright, you can set it to Power to specify the power of the lamp yourself to make fine adjustments to the brightness of the projected image. you could encounter situations where the image from projector A being brighter than projector B. When this occurs, you can use this function you could encounter situations where the image from projector A being brighter than projector B. When this occurs, you can use this function to fine tune the brightness of the two projectors to achieve consistent image brightness. To access this function, go to the OSD Menu → LAMPS → Power and adjust accordingly.

LAMPS


Depending on the application condition, either single lamp or dual lamps can be selected via OSD menu. When the projector was switched from single lamp to dual lamps, an hourglass OSD will block the user from the further OSD operation for 7 seconds. When the projector was switched from dual lamp mode to single lamp, the lamps selection OSD will be blocked for 90 seconds for lamp cooling. The lamp power can be adjusted from 82% ~ 100%.

- Single**

When the projection environment is sufficiently dark that a single lamp could achieve the desired projection brightness, you can choose to use one single lamp. The projector will automatically determine the usage hours for lamp1 and lamp2 and choose the lamp with lower hours for the operation.

- Dual**

When you require brighter image from the projector, please operate the projector with Dual lamps.

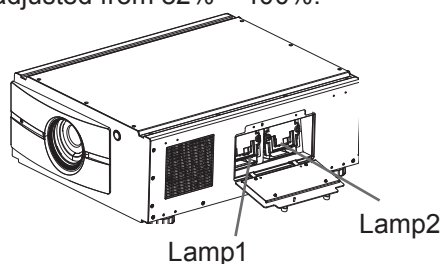

High Altitude Mode

Use this function to control the projector's cooling fan. You can set it to Off or On. The default setting is Off.

Under normal circumstances, the projector will operate normally with this function set to Off. By default, the projector will detect the temperature of the surrounding environment to regulate the speed of the cooling fan. When the ambient temperature rises, fan speed will increase (generates louder noise) to make sure the heat inside the projector gets discharged and keep the projector working normally.

However, if you were to operate the projector in environment of excessive heat or in areas of high altitude, the projector may automatically shut down. When this happens, you can enable this function by setting it to On to force the cooling fan to work at a higher speed to regulate the temperature inside the projector.

- High altitude region refers to area with elevation over 1500 meters (4900 feet).
- When operating in normal altitude environments, the projector will adjust the cooling fan according to the temperature of the working environment. When the temperature rises above 30C, the projector will automatically increase fan speed.
- According to the product specification, the maximum operating altitude for the projector is at 3000m@25C. This means that you should not be operating the projector in high altitudes when the working environment is over 25C. (Due to the air thinning substantially at high altitudes, the result of cooling achieved by the cooling fan is significantly reduced compared to operation on level ground. With low atmospheric pressure and high operating temperature, the cooling fan will not be able to disperse the heat adequately)

Power

This function will not be available if you have set the lamp to Eco or Normal modes (OSD Menu → LAMPS → Mode); you can only adjust this setting when the lamp has been set to "Power". You can specify the lamp power in the range of 82% ~ 100%. Generally speaking, the lower the power, the dimmer the image will be but the lamp will have longer lifecycle. In contrast, the higher the power, the brighter the image will be at the cost of shorter lamp lifecycle.

Lamp1 Status

This function is limited to display purposes to inform the user of Lamp1 status (On or Off).

Lamp2 Status

This function is limited to display purposes to inform the user of Lamp2 status (On or Off).

Lamp1 Run Time

This function is limited to display purposes to inform the user of Lamp1's total run time.

Lamp2 Run Time

This function is limited to display purposes to inform the user of Lamp2's total run time.

ALIGNMENT

BARCO RLM W6					
INPUT	IMAGE	LAYOUT	LAMPS	ALIGNMENT	CONTROL SERVICE
				Rear Projection	< Off >
				Ceiling Mode	< Off >
				Lens Control	Enter
				Keystone	Enter
				Dynamic Contrast	< Off >
				Gamma	< 2.2 >
				Internal Patterns	Enter
				Color Space	< Native >
				Lens To Midposition	Execute

Rear Projection

The default setting is Off.

When you have set up the projector for rear projection, please set it to ON. For more information on different modes of projection, refer to Chapter IV _ Projector installation.

Ceiling Mode

The default setting is Off.

When you have set up the projector for ceiling mode (hung from the ceiling in reverse), please set it to ON. For more information on different modes of projection, refer to Chapter IV _ Projector installation.

Lens Control

- **Zoom**
This function is identical to the one covered in previous sections. Refer to Chapter III → Installing the projector → Adjusting focus for more information.
- **Focus**
This function is identical to the one covered in previous sections. Refer to Chapter III → Installing the projector → Adjusting focus for more information.
- **Shift**
This function is identical to the one covered in previous sections. Refer to Chapter III → Installing the projector → Adjusting the lens' horizontal and vertical shift for more information.

Keystone

Use this function to correct keystone caused by projection angle.

- **Horizontal Keystone**
This function is identical to the one covered in previous sections. Refer to Chapter III → Installing the projector → Correcting horizontal keystone caused by projection angle for more information.
- **Vertical Keystone**
This function is identical to the one covered in previous sections. Refer to Chapter III → Installing the projector → Correcting vertical keystone caused by projection angle for more information.

* The summation of the absolute value of horizontal keystone and vertical keystone is limited to less than or equal to 350. *

Dynamic Contrast

Use this function to configure the projector to automatically adjust image contrast from the source upon start up or shut down. When activated, the projector will dynamically adjust the image contrast from the beginning of the projection until the content has ended.

Gamma

Different Gamma settings will affect viewers' perception of the image. Generally speaking, for images that are darker, it is recommended that Gamma be set higher to yield better image quality in darker regions by sacrificing details in brighter areas. In contrast, when projecting brighter images, you can set the Gamma lower to give up details in the darker areas to make the brighter areas (i.e. clouds) more visible.

You can choose from five different gamma settings (1.8, 2.0, 2.2, 2.35 and 2.5) on the projector. The projector's default gamma value is at 2.2.

Every setting has precisely defined phases to display all primary colors (red, green, blue) and secondary colors (yellow, cyan, magenta) in millions of pixels. Changing any number in the setting will change the resulting color and rearrange the color "triangle".

Internal Patterns

The projector comes with some standard built-in patterns for testers to calibrate the equipment. These include:

0 = Off	1 = Color Bars	2 = Hatch	3 = Burst	4 = Red
5 = Green	6 = Blue	7 = White	8 = Black	9 = TI-Red
10 = TI-Red	11 = TI-Blue	12 = TI-Ramp		

Color Space

Using different color space will create different color presentation in the projected image. You can choose from the following color gamma:

- **Native**
Choose this to apply the projector's native color gamut
- **EBU**
Choose this to apply the EBU color gamut; it is primarily suited for input devices using PAL, SECAM, 576i, 576p and so forth.
- **SMPTE**
Choose this to apply the SMPTE color gamut; it is primarily suited for input devices using NTSC, 480i, 480p and so forth.
- **Custom**
Choose this to customize the color gamut according to your preference through projector Toolset application.

Lens To Midposition

After series of lens shift operations, this function can be used to return the lens to the center position.

Control

BARCO RLM W6						
INPUT	IMAGE	LAYOUT	LAMPS	ALIGNMENT	CONTROL	SERVICE
				IR Address	< 1 >	
				Eco Network Power	< Off >	
				Projector Control	< Network >	
				Network	Enter	
				Menu Position	< Center >	
				Start Up Logo	< On >	
				Start Up Chime	< On >	
				Button 1	Enter	
				Button 2	Enter	
				Button 3	Enter	
				Button 4	Enter	
				Button 5	Enter	
				Trigger 1	< Auto >	
				Trigger 2	< 16:9 >	
				Auto Source	< On >	
				Language	Enter	

IR Address

Use this function to configure the projector's IR code receive commands from the remote control. The default value is 1. If you have other equipment in your home that could pick up the command from the projector's remote control, it is recommended that you set the remote control code to 2.

When you are running two projectors via serial connection, you can set the code on one projector as "1" and "2" for the other projector. By doing so, you will be able to control two projectors with the same remote control.

When you want to switch your remote control from code 1 projector to code 2 projector, press and hold the ENTER and ADDRESS buttons on the remote control simultaneously (for approximately 5 seconds); the backlight module on the remote control will blink to confirm the switch.

Eco Network Power

The projector can be connected to a network via its RS-232 port and 10/100 BASE-T port for remote operation with two separate boards to control the signal sources from RS-232 and 10/100BASE-T ports.

If you do not require remote operation of the projector over a network, it is recommended that you set this function to On to activate the ECO Network Power. This will turn off the power that is used to control the 10/100 BASE-T board. However, you will not be able to operate the projector remotely over a network as long as the function remains activated.


By setting it to Off, the function will be disabled. You won't be able to conserve power but you can control the projector remotely over a network.

Network

To control the projector via network, after connecting the network cables for a PC and the projector, you can use this OSD function to view the relevant network information (such as IP Address, Subnet Mask, Gateway and DHCP) of the projector. Please configure the PC to be connected to the projector with a proper IP address with the same subnet mask, gateway as the projector. The default IP address of the projector is 192.168.0.100. The network settings of the projector can only be changed through the web-page control or projector Toolset application.

Menu Position

You can use this function to designate which area on the image the OSD Menu will appear. As you can see from the diagram below, there are five positions where you can choose to have the OSD Menu displayed. The default setting is "Center".

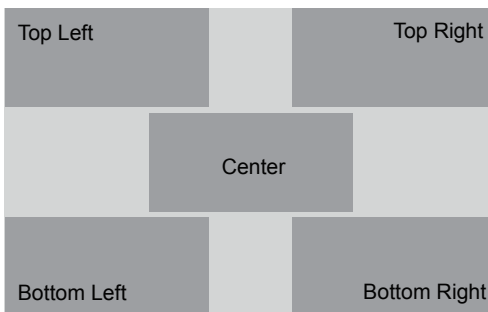

Start Up Logo

You can use this function to have the projector display the Barco logo in the start up screen. Set **On** to display the Barco logo during start up and **Off** to display a blank image.

Start Up Chime

Set it to On to have the projector play a sound effect during start up; when it is set to off, the projector will not play any sound effect to indicate start up.

Button 1~5

Use this function to designate the image source for each corresponding button.

For example, if you have assigned Button 1 as HDMI1 and Button 2 as RGB-S,

when you press  on the remote control, the projector will show the image from HDMI1.

when you press  on the remote control, the projector will switch to the image from RGB-S.

You can choose from eight different input sources on the projector, namely: HDMI1, HDM2, RGB D-15(RGB-HV/SOG), YUV1(RGB-S), YUV2(RGBHV/YUV2), Composite Video(Video), S-Video, and RGB-S.

6 OSD Menu description

Trigger1 ~2

The projector comes with two sets of Trigger output. You can configure two different devices connected to the projector via the trigger ports to be automatically turned on when the projector is on. There will be a 2-3 second delay prior to activation to prevent operation of this function when the user is choosing the desired aspect ratio.

5:4	Outputs 12V of power on Trigger1 or 2 when the user chooses the 5:4 aspect ratio.
4:3	Outputs 12V of power on Trigger1 or 2 when the user chooses the 4:3 aspect ratio.
16:10	Outputs 12V of power on Trigger1 or 2 when the user chooses the 16:10 aspect ratio.
16:9	Outputs 12V of power on Trigger1 or 2 when the user chooses the 16:9 aspect ratio.
1.88	Outputs 12V of power on Trigger1 or 2 when the user chooses the 1.88 aspect ratio.
2.35	Outputs 12V of power on Trigger1 or 2 when the user chooses the 2.35 aspect ratio.
Letterbox	Outputs 12V of power on Trigger1 or 2 when the user chooses the Letterbox aspect ratio.
Native	Outputs 12V of power on Trigger1 or 2 when the user chooses the native aspect ratio.
Auto	Outputs 12V of power on Trigger 1 or 2 when the projector is turned on.

Auto Source

Off: default setting. By enabling this function, the projector will automatically determine the source of input every time it is turned on so that the user will not have to make the selection on the OSD Menu.

Setting the function off will require the user to specify source of image input on the OSD Menu in order for the projector to display the intended image.

Language

You can use this function to select the language you wish for the OSD Menu to be displayed in. You can choose from the following nine languages:

English, French, Spanish, German, Portuguese, Simplified Chinese, Traditional Chinese, Japanese and Korean.

Service

BARCO RLM W6						
INPUT	IMAGE	LAYOUT	LAMPS	ALIGNMENT	CONTROL	SERVICE
					Model :	RLM W6
					Serial Number :	168886661220
					Software Version :	MP02-GP02-0001-00
					Active/PIP Source :	HDMI 1 / RGB D-15
					Pixel Clock :	153.97 MHz
					Signal Format :	1920x1200@60Hz
					H/V Refresh Rate :	H: 74.019 KHz V: 60 HZ
					Lamp1 Run Time :	122 HRS
					Lamp2 Run Time :	88 HRS
					Lamp Hour Reset	Enter
					Projector Run Time :	1268 HRS
					Blue only	< On >
					Factory Reset	Enter

Service

The functions covered in this unit relate to the display of some basic information about the projector.

Memory of the custom timing files will be erased in the Factory Reset operation.

- Model: the designated model number of the projector.
- Serial Number: the designated serial number of the projector.
- Software Version: the version of software installed on the projector.
- Active/PIP Source: displays the current PIP sources.
- Pixel Clock: displays the pixel clock of the current input signal.
- Signal Format: displays the format of the current input signal.
- H/V Refresh Rate: displays the horizontal and vertical refresh rates for the current image.
- Lamp1 Run Time: displays Lamp1's current run time.
- Lamp2 Run Time: displays Lamp2's current run time.

Notice! When a lamp's run time has reached 1500-2000 hours or when you notice the projected image to be noticeably dimmer, please replace the lamp.

- Projector Run Time: displays the projector's total operating hours.

Lamp Hour Reset

Use this function to reset the hours for lamp1 and lamp2 to zero.

After replacing the lamp, remember to reset the lamp hours to ensure the accuracy of lamp hours displayed in the OSD Menu.

Blue Only

Enabling this option will make the projector display only blue color to facilitate the process of image inspection for the service personnel. For detailed instructions on how to use this function, consult a qualified service personnel.

Factory Reset

Use this function to restore the configurations in the OSD Menu back to factory default.

Note that this function will not apply to items including no signal, network, Projector control, startup Logo, language, High Altitude mode and lamp hours.

When Factory Reset is executed, all source memories created by the projector (i.e. timings files) will be erased.

7 Lamp and filter maintenance

Lamp replacement


The lifecycle of ordinary projection lamp typically lasts for 1500-2000 hours before requiring replacement (different lamp configurations will affect lamp life). From the OSD Menu, you can go to LAMPS → Lamp1 or 2 Run Time to check how long a lamp has been used. You should also replace the lamp when the projected image gets noticeably darker. Contact your local dealer to purchase new certified lamps for your projector.

To replace the projector lamp


1. Turn off the projector and unplug the power cord. Let the projector cool for approximately 60 minutes before removing the lamp module for replacement.

When you turn off the projector, the lamp inside the projector will still be very hot (approximately 200 ~ 300°C). If you attempt to replace the lamp without allowing the projector to cool, you could risk scalding yourself. This is why you should wait for no less than 60 minutes for the lamp to cool down in order to perform the replacement safely.


2. Loosen the lamp cover.




3. Use a screw driver to loosen the screws as shown in the illustration.

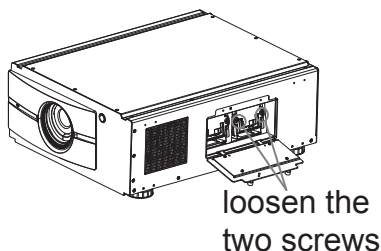



4. Grasp the metal rod on the lamp cover and pull the lamp out.



5. Insert the new lamp in the direction shown in the illustration into the lamp assembly; tighten the two screws using a screw driver and make sure the lamp is firmly secured to prevent the lamp from shaking or poor contact.



6. Replace the lamp cover and firmly secure the two screws on the lamp cover.




7. Reconnect power to the projector and reset the lamp usage timer. Refer to OSD Menu description → Service → Lamp1, 2 Run Time.

Cleaning the filter

In order to keep the interior of the projector clean, the projector is equipped with a filter to keep out dust and other small particles. It is recommended that you clean the projector's filter around 500 hours of projector operation. If you are operating the projector in a dusty environment, it is recommended that you clean the filter more often.


Dust clogs at the filter will prevent the projector from drawing cool air to lower the internal temperature. This could lead to overheating and cause the projector to malfunction or become damaged.

Use a vacuum cleaner to clean the ventilation slots.




To clean the filter at the ventilation slots, refer to the following illustration:

1. Loosen the two screws on the cover of the ventilation slot.




2. Remove the dirty filter; you can clean it directly using water. Leave it to dry before replacing it for further use. If the filter is broken, purchase a new one to replace it.




Take out the filter and clean it.

3. Insert the clean filter.




Put the clear filter inside the cover

4. Reattach the filter cover and tighten the two screws.



Close the filter cover



then fasten the 2 screws


8 Simple troubleshooting and definition of the LED indicators

The following table offers a list of common problems with projectors and how to troubleshoot. If the recommended solutions fail to resolve your problem, contact your local dealer to arrange for servicing; do not attempt to service the projector by yourself.

Problem	Possible cause	Solution
You cannot turn on the projector	1. The projector may be unplugged 2. Check the AC POWER SWITCH on the back of the projector and see if it is flipped to ON. 3. The AC socket may be faulty 4. The lens cover is not replaced properly	1. Plug the projector's power cord into a wall outlet 2. Flip the power switch to "I". 3. Make sure the AC socket is working properly. 4. Make sure the lens cover has been properly replaced.
You cannot turn on the projector after turning it off	1. You will not be able to turn on the projector within two minutes after you have just turned it off. This feature is designed to protect the lamp.	1. Wait for the projector to cool down completely before starting it up again (the projector's STAND BY indicator will turn blue)
The remote control does not operate normally	1. The battery might have run out 2. You might have inserted the batteries in the wrong orientations 3. You may be operating the remote control too far away from the projector's IR sensor or exceeded the maximum angle of signal reception ; there might be an obstacle between the projector and the remote control or there might be a source of intense light near the IR receiver. 4. Ø 3.5mm A wired remote connector might be connected to the projector's 3.5mm port. 5. The remote control's address is not consistent with the projector's address.	1. Replace new batteries 2. Make sure the batteries are inserted in the right orientation. 3. Adjust the distance/angle between the projector and the remote control and try again; if there are obstacles between the projector and the remote or source of intense light near the IR sensor resolve these situations and try again. 4. Remove the wired remote cable or operate the projector using wired remote. 5. Press the ENTER button on the remote control followed by the Address button until the panel of the remote control flashes once (approximately 5 seconds) and try again.
You are able to turn on the projector and access the OSD Menu but no picture appears.	1. The projector may not be turned on properly or you have not selected the correct input source. 2. You might not have connected the source device correctly or the source might not be connected to the projector at all.	1. Make sure the projector is turned on properly and select the correct input source. 2. Check the connection between the projector and the input device.
You have connected the projector to a DVD player as the input source but the image appears broken or split in halves.	The DVD player is connected to the projector through component cables (RGB-S or RGBHV/ YUV2) and you have set it to progressive scan.	Disable the progress scanning function on the DVD player.
The picture looks dim	1. The image brightness, contrast, color and tint might need proper adjustment. 2. The lamp is due for replacement.	1. Adjust the image brightness, contrast, color and tint. 2. Replace the projector lamp.
The image is too bright or the bright areas are blurry	The contrast might have been set too high.	Lower contrast settings.
The image appears washed out or the dark areas appear too bright	The image brightness might have been set too high.	Lower brightness settings.
The image is blurry	1. The lens may not be in focus. 2. The temperature or humidity of the projector's working environment may have changed in mid operation (i.e. going from cold to warm or dry to humid), leading to condensation of moisture inside the projector.	1. Adjust lens focus. 2. Turn of the projector first and wait for the moisture in the projector to evaporate.
The color of the image looks pale	The input signal type (RGB-S/RGBHV/YUV2) might not have been connected properly	Check to make sure that the connections between the projector and the input device are correct.
The image flashes occasionally	1. The cables might not have been properly connected or the input device itself may be faulty. 2. If the problem persists, it may also mean the lamp might be faulty.	1. Make sure the connector and the input device have been properly connected; check to see if the input device is in normal working order. 2. Replace the projector lamp.
The colors of the projected image are out of place (i.e. displaying red as blue)	The G/Y, R/Pr, B/Pb cables from the input might have been incorrectly connected to the input.	Please make sure the input source has been correctly connected to the projector.
The noise from the cooling fan suddenly grew louder	The temperature inside the projector might have risen.	When the temperature inside the projector rises, the cooling fan will operate at a higher speed to discharge the internal heat more rapidly.
The LED indicator on the projector's rear panel is blinking in red	The lamp or the cooling fan could be faulty.	Refer to the definition of LED status.

- The lamp has reached the end of its service life; please replace it.

LED STATUS

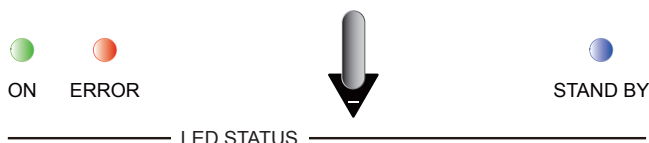

STAND BY

Turns blue

Indicates that the projector is in standby mode; this also means the projector has not been turned on by pressing the **SOFT POWER** button but has been connected to power.

The indicator is off

This indicates that the projector has either been turned on and is working normally or the projector is not connected to power.

ON

Turns green

This indicates that the projector has been turned on and is working normally.

Flashes in green

This indicates that the projector is currently warming up or cooling down and will not respond to button operations.

The indicator is off

This indicates that the projector is currently in stand by mode.

ERROR

Flashes **once** in red

The projector lamp is faulty; check to see if the lamp is damaged or if it hasn't been properly installed.

Flashes **twice** in red

The lamp cover is not properly replaced.

Flashes **three** times in red














The cooling fan inside the projector is not working;
seek assistance from a qualified service personnel.

Flashes **four** times in red

The projector temperature is too high; try cleaning the ventilator slots or unplugging the power cord to resolve the issue.

Flashes **five** times in red

The projector filter might not have been inserted properly; check the ventilation slot and make sure the filter has been properly replaced and inserted.

	Blue (STAND BY)	Green (ON)	Red (ERROR)
Standby			
Cooling / Warm up			
Power on / Normal			
			
Lamp fail			 repeat
Lamp door open			 repeat
Fan fail			 repeat
Over Temperature			 repeat
Svstem Error			

Specifications

Description	Specifications
Brightness - Standard	5400 ANSI lumens
Resolution	1920 × 1200 (Native)
Micro display	3 × DLP 0.67" DMD
Contrast - Standard	1800 : 1 Full view
Luminence uniformity - Standard	85%
Lamp	2 × 280W UHP
Projection lens - projection ratio	Zoom lens: 1.45~1.74 1.74~2.17 2.17~2.90 2.90~4.34 4.34~6.76 Fix lens: 0.77 1.16
Input/Output ports	1 × YUV1 1 × Video 1 × S-Video 2 × HDMI 1 × RGBHV/YUV2 1 × 10/100 BASE-T 1 × RS-232 2 × 12V Trigger 1 × IR ext.
Primary voltage range	100V - 240V (±10%)
Power consumption (110V)	750W
Maximum input resolution	1920 × 1200
Operating temperature	0~40°C Note 1: The normal operating temperature of the DMD is between 10~65°C Note 2: The DMD may operate normally for approximately 10 minutes under 0~10°C short operation under such temperature will not result in DMD damage.
Noise level under normal operation	< 40 dB
Noise level under Eco mode	< 37 dB
Weight	28 kg

Signal Type	Resolution	Frame Rate	Video	S-Video	SCART (RGB-S)	Y-Pr-Pb (YUV1)	HD15, BNC - RGBHV	HD15, BNC - YUV	HDMI - RGB	HDMI - YUV	References
PC	640×480	59.94					x		x		VESA DMT, CEA-861D Format 1
	640×480	74.99					x		x		VESA DMT
	640×480	85					x		x		VESA DMT
	800×600	60.32					x		x		VESA DMT
	800×600	75					x		x		VESA DMT
	800×600	85.06					x		x		VESA DMT
	848×480	47.95					x		x		VESA CVT
	848×480	59.94					x		x		VESA CVT
	1024×768	60					x		x		VESA DMT
	1024×768	75.03					x		x		VESA DMT
	1024×768	85.03					x		x		VESA DMT
	1280×720	47.95					x		x		VESA GTF
	1280×1024	60.02					x		x		VESA DMT
	1280×1024	75.02					x		x		VESA DMT
	1280×1024	85.02					x		x		VESA DMT
	1400×1050	60					x		x		VESA CVT
	1600×1200	60					x		x		VESA DMT
	1920×1080	47.95					x		x		VESA CVT
	1680×1050	59.94					x		x		VESA CVT
	1920×1200	50.00					x		x		PCLK = 158.25MHz
	1920×1200 RB	59.94					x		x		VESA CVT, PCLK=153.75MHz
	1920×1200 RB	60					x		x		VESA CVT, PCLK=154MHz
Apple Mac	640×480	66.59					x		x		VESA DMT
	832×624	74.54					x		x		VESA DMT
NTSC	NTSC (M, 4.43)	59.94	x	x							ITU-R BT.1700, SMPTE 170M
PAL	PAL (B,G,H,I)	50	x	x							ITU-R BT.1700
	PAL (N)	50	x	x							ITU-R BT.1700
	PAL (M)	59.94	x	x							ITU-R BT.1700
SECAM	SECAM (M)	50	x	x							ITU-R BT.1700
SDTV	RGBS	50			x						RS-170, SCART, ITU-R BT.656
	1440x480i	60							x	x	CEA-861-D Format 6 & 7
	1440x576i	50							x	x	CEA-861-D Format 21 & 22
	480i	59.94				x					SMPTE 125M
	576i	50				x					ITU-R BT.601
EDTV	480p	59.94				x	x	x	x	x	SMPTE 293M, CEA-861-D Format 2 & 3
	576p	50				x	x	x	x	x	ITU-R BT.1358, CEA-861-D Format 17 & 18
HDTV	1035i	60				x	x	x	x	x	SMPTE 260M
	1080i	50				x	x	x	x	x	SMPTE 274M, CEA-861-D Format 20
	1080i (Aus)	50				x	x	x	x	x	SMPTE 295M
	1080i	59.94				x	x	x	x	x	SMPTE 274M, CEA-861-D Format 5
	1080i	60				x	x	x	x	x	SMPTE 274M, CEA-861-D Format 5
	720p	50				x	x	x	x	x	SMPTE 296M, CEA-861-D Format 19
	720p	59.94				x	x	x	x	x	SMPTE 296M, CEA-861-D Format 4,
	720p	60				x	x	x	x	x	SMPTE 296M, CEA-861-D Format 4
	1080p	23.98				x	x	x	x	x	SMPTE 274M, CEA-861-D Format 32
	1080p	24				x	x	x	x	x	SMPTE 274M, CEA-861-D Format 32
	1080p	25				x	x	x	x	x	SMPTE 274M, CEA-861-D Format 33
	1080p	29.97				x	x	x	x	x	SMPTE 274M, CEA-861-D Format 34
	1080p	30				x	x	x	x	x	SMPTE 274M, CEA-861-D Format 34
	1080p	50				x	x	x	x	x	SMPTE 274M, CEA-861-D Format 31
	1080p	59.94				x	x	x	x	x	SMPTE 274M, CEA-861-D Format 16
	1080p	60				x	x	x	x	x	SMPTE 274M, CEA-861-D Format 16

9 Projector specifications

