

# 8785

## ImagePro 8785 Portable LCD Projector



*The ImagePro 8785 is a light (4.1 lbs), networkable/wireless portable projector ideal for classroom or conference room.*

### 8785 FEATURES

- 2000 Lumens Brightness
- XGA Resolution
- 3 Polysilicon Active-Matrix LCDS
- Network functionality
- Wireless connectivity
- Security Transition Detector
- Vertical Keystone correction  $+/-30^\circ$
- Easy to transport, only 4.1 lbs.
- Remote mouse control
- Blackboard and Whiteboard mode

**Wireless 802.11 b/g operation via an included SD card or network connection via a RJ-45 port**

THE ALL NEW

# DUKANE

**Education. Presentation. Inspiration.**

[www.dukcorp.com](http://www.dukcorp.com)




ConVA by Dukane delivers control of classroom audio visual assets in sync with our Student Response System. Experience tomorrow's classroom today with ConVA. Visit [www.convasystems.com](http://www.convasystems.com).

**Call Dukane: 800-676-2485**

# ImagePro 8785

## Portable LCD projector

### Back Panel Connections

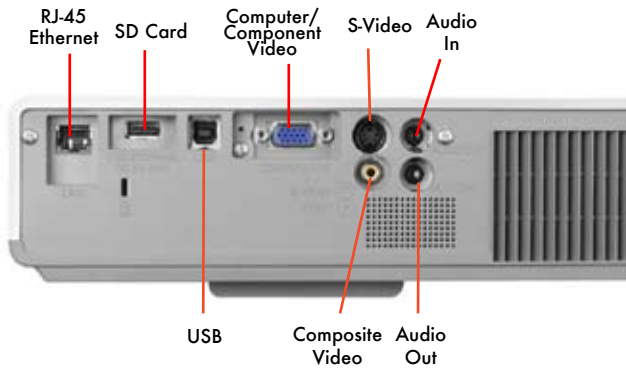

### Key features:

- XGA (1024 x 768) resolution
- 2000 lumen brightness
- 3 Polysilicon Active-Matrix LCDs
- Wide angle lens
- Network/wireless connectivity
- PIN Security Transition Detector
- Vertical keystone correction +/- 30°
- Easy to transport, only 4.1 lbs.
- Remote mouse control
- Blackboard and whiteboard mode
- Five Year Warranty and One Year Peace of Mind Service

### 8785 Projection Table

Image Size 4:3		Throw Distance	
Diagonal	Width	Min.	Max.
Inches	Inches	Feet	Feet
30	24	2.5	3.0
60	48	5.1	6.1
80	64	6.8	8.1
100	80	8.5	10.2
120	96	10.2	12.3
150	120	12.8	15.3
200	160	17.0	20.4

# DUKANE

Dukane Corporation  
 Audio Visual Products Division  
 2900 Dukane Drive  
 St. Charles, Illinois 60174  
 800-676-2485  
 630-584-5156  
 avsales@dukcorp.com  
 www.dukcorp.com/av



toll-free  
 fax  
 e-mail

ImagePro is a registered trademark of Dukane Corporation  
 #11700-L-06

### Specifications 8785

Image Element	0.63" polysilicon active-matrix TFT x3
Brightness	2000 ANSI lumens (1600 lumens in Whisper Mode)
Resolution	1024 x 768 pixels (H X V), XGA
Contrast	500:1
Scanning Frequency	fh 15 -106 kHz, fv 50-120 Hz
Lens	Manual zoom (F1.7 - 1.9), 1.2X
Lens Throw Ratio	1.3 -1.5:1 throw distance to image width
Keystone Correction	Digital, vertical +/-30 deg
Aspect Ratio	4:3, 16:9 selectable
Computer	VGA, SVGA, XGA, SXGA, SXGA+, UXGA
Compatibility	Compressed PC and MAC13" and MAC16"
Video Compatibility	NTSC, NTSC4.43, PAL, SECAM, PAL-M, PAL-N,
Component Video,	HDTV (1080i, 720p, 576i, 480i)
Image Control	Freeze function, electronic magnification and pan
Mouse Control	Using USB
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	160W UHB
Lamp Life	2000 hours (typical) 3000 hours (whisper mode)
Audio	1 speaker 1 watt
Throw Distance	30" to 368"
Screen Size, diagonal	30" to 300"
Inputs, Video	(1) Component, Shared on 15 pin D-Sub (1) S-video, Mini DIN 4-pin (1) Composite video, RCA x 1
Inputs, Computer	(1) RGB, 15 pin D-sub
Inputs, Audio	(1) Stereo mini jack
Outputs, Audio	(1) Stereo mini jack
Outputs, Monitor	RGB, 15 pin D-sub
Outputs, Control	USB Mouse control
Other, Options	SD Card, USB 2.0 Memory Reader
Wireless	Wireless 802.11 b/g
Ethernet	Ethernet Rj-45 port/100 Base T
Security	Kensington lock slot
Closed Captioning	CC
Fan Level	35dB, ultra quiet 29dB in Whisper Mode
Operating Temperature	41-95 deg F
Power	AC 100-120V, AC 220-240V 50/60 Hz, 250 watt
Size (WxHxD)	10.8" x 2.3" x 8.1"
Weight	4.1 lbs.
Shipping Weight	14 lbs.
Carton Size	16" x 14" x 12"
Accessories Included	Remote control, batteries, power cord, RGB cable, SD Wireless Card, operators manual and soft carry case.
Safety	UL/C-UL, FCC Class B, CE
Optional Accessories	Lamp 456-8770 Ceiling Mount, Universal; RPA-U

Five (5) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 1 year Peace-of-Mind Loaner Program.

# 5YR