


ImagePro 8917H

Portable LCD projector

Back Panel

Connections

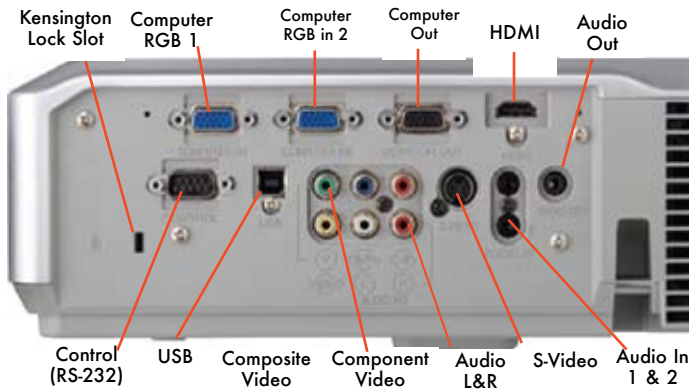

Key features:

- WXGA (1280 x 800) resolution
- 3000 ANSI lumens of brightness
- New 16 to 10 format
- Easy maintenance in ceiling mount with lamp access on top & 2000 hour filter with side access
- Monitor loopthrough & remote mouse control
- Powerful 10W Speaker
- Built-In Anti-theft security, Transition detector
- Audio passthrough for sound when projector is off
- Auto Vertical keystone correction
- HDTV ready, HDMI input
- Lock slot, security bar and transition detector
- Five Year Warranty and One Year Peace of Mind

8917H Projection Table

Image Size 16:10		Throw Distance	
Diagonal	Width	Min.	Max.
Inches	Inches	Feet	Feet
30	25	3.0	3.7
40	51	6.2	7.4
50	68	8.2	9.9
60	85	10.3	12.4
80	102	12.4	14.9
100	127	15.5	18.7
200	170	20.7	24.3
300	254	31.7	37.4

Throw Ratio (distance to width) 1.5 to 1.8



Dukane Corporation
 Audio Visual Products Division
 2900 Dukane Drive
 St. Charles, Illinois 60174
 800-676-2485
 630-584-5156
 avsales@dukcorp.com
 www.dukcorp.com/av

toll-free
 fax
 e-mail



ImagePro is a registered trademark of Dukane Corporation
 #11700-L-06

Specifications 8917H

Image Element 0.6" polysilicon active-matrix TFT x3
 Brightness 3000 ANSI lumens (2400 lumens in Whisper Mode)
 Resolution 1280 x 800 pixels (H X V), WXGA
 Contrast 400:1
 Scanning Frequency fh 15 -106 kHz, fv 50-120 Hz
 Lens Manual zoom (F1.6 - 1.8), 1.2X
 Lens Throw Ratio 1.5 -1.8 :1 throw distance to image width
 Keystone Correction Digital, vertical +/-30 deg
 Aspect Ratio Native 16:10, 4:3, selectable
 Computer SVGA, VGA, XGA, SXGA, UXGA
 Compatibility MAC13" and MAC16"
 Video Compatibility NTSC, NTSC4.43, PAL, SECAM, PAL-M, PAL-N,
 Component Video, HDTV;1080i/p, 720p, 576i, 480i/p)
 Image Control Freeze function, electronic magnification and pan
 Mouse Control Using USB
 Projection Modes Front/rear/ceiling
 Color Reproduction 24 bit (16.7 million)
 Lamp 230W UHB
 Lamp Life 2000 hours (typical) 3000 hours (whisper mode)
 Audio 1 speaker 10 watt
 Throw Distance 36" to 423"
 Screen Size, diagonal 30" to 300"
 Inputs, Video (1) Component, RCA x 3
 (1) S-video, Mini DIN 4-pin
 (1) Composite video, RCA x 1
 Inputs, Computer (2) RGB, 15 pin D-sub
 Input, Digital (1) HDMI
 Inputs, Audio (2) Stereo mini jack: for PC/Access.
 (1) RCA x 2 (for video)
 Outputs, Audio (1) Stereo mini jack, adjustable
 Outputs, Monitor RGB, 15 pin D-sub
 Inputs, Control RS-232, 9 pin D-sub
 USB (Mouse control)
 Security Kensington lock slot & Security Bar
 Fan Level 39dB, ultra quiet; 34dB WhisperMode
 Closed Caption CCI, CC2, CC3, CC4, T1,T2,T3,T4
 Operating Temperature 41-95 deg F
 Power AC 100-120V, AC 220-240V
 50/60 Hz, 320 watt
 Size (WxHxD) 13.4" x 3.9" x 10.6"
 Weight 7.7 lbs.
 Shipping Weight 17 lbs.
 Carton Size 16" x 14" x 12"
 Accessories Included Remote control, batteries, power cord, RGB cable, RCA video cable, operators manual and soft carry case.
 Safety UL/C-UL, FCC Class B
 Optional Accessories Lamp 456-8755H
 Ceiling Mount, Universal; RPM-U Filter; MU05611

Five (5) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 1 year Peace-of-Mind Loaner

