


ImagePro 8917H

Portable LCD projector

Back Panel

Connections

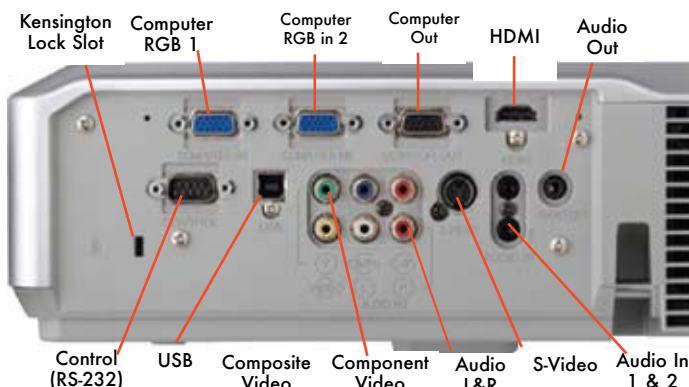

Key features:

- WXGA (1280 x 800) resolution
- 3000 ANSI lumens of brightness
- New 16 to 10 format
- Easy maintenance in ceiling mount with lamp access on top & 2000 hour filter with side access
- Monitor loopthrough & remote mouse control
- Powerful 10W Speaker
- Built-In Anti-theft security, Transition detector
- Audio passthrough for sound when projector is off
- Auto Vertical keystone correction
- HDTV ready, HDMI input
- Lock slot, security bar and transition detector
- Five Year Warranty and One Year Peace of Mind

8917H Projection Table

Image Size 16:10		Throw Distance	
Diagonal	Width	Min.	Max.
Inches	Inches	Feet	Feet
30	25	3.0	3.7
40	51	6.2	7.4
50	68	8.2	9.9
60	85	10.3	12.4
80	102	12.4	14.9
100	127	15.5	18.7
200	170	20.7	24.3
300	254	31.7	37.4

Throw Ratio (distance to width) 1.5 to 1.8

DUKANE

Dukane Corporation
Audio Visual Products Division
2900 Dukane Drive
St. Charles, Illinois 60174
800-676-2485
630-584-5156
avsales@dukcorp.com
www.dukcorp.com/av

toll-free
fax
e-mail



ImagePro is a registered trademark of Dukane Corporation
#11700-L-06

Specifications 8917H

Image Element	0.6" polysilicon active-matrix TFT x3
Brightness	3000 ANSI lumens (2400 lumens in Whisper Mode)
Resolution	1280 x 800 pixels (H X V), WXGA
Contrast	400:1
Scanning Frequency	fh 15 -106 kHz, fv 50-120 Hz
Lens	Manual zoom (F1.6 - 1.8), 1.2X
Lens Throw Ratio	1.5 -1.8 :1 throw distance to image width
Keystone Correction	Digital, vertical +/-30 deg
Aspect Ratio	Native 16:10, 4:3, selectable
Computer Compatibility	SVGA, VGA, XGA, SXGA, UXGA
Video Compatibility	MAC13" and MAC16"
Component Video, Image Control	NTSC, NTSC4.43, PAL, SECAM, PAL-M, PAL-N, HDTV;1080i/p, 720p, 576i, 480i/p) Freeze function, electronic magnification and pan
Mouse Control	Using USB
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	230W UHB
Lamp Life	2000 hours (typical) 3000 hours (whisper mode)
Audio	1 speaker 10 watt
Throw Distance	36" to 423"
Screen Size, diagonal	30" to 300"
Inputs, Video	(1) Component, RCA x 3 (1) S-video, Mini DIN 4-pin (1) Composite video, RCA x 1
Inputs, Computer	(2) RGB, 15 pin D-sub
Input, Digital	(1) HDMI
Inputs, Audio	(2) Stereo mini jack: for PC/Access. (1) RCA x 2 (for video)
Outputs, Audio	(1) Stereo mini jack, adjustable
Outputs, Monitor	RGB, 15 pin D-sub
Inputs, Control	RS-232, 9 pin D-sub USB (Mouse control)
Security	Kensington lock slot & Security Bar
Fan Level	39dB, ultra quiet; 34dB WhisperMode
Closed Caption	CCI, CC2, CC3, CC4, T1,T2,T3,T4
Operating Temperature	41-95 deg F
Power	AC 100-120V, AC 220-240V 50/60 Hz, 320 watt
Size (WxHxD)	13.4" x 3.9" x 10.6"
Weight	7.7 lbs.
Shipping Weight	17 lbs.
Carton Size	16" x 14" x 12"
Accessories Included	Remote control, batteries, power cord, RGB cable, RCA video cable, operators manual and soft carry case.
Safety	UL/C-UL, FCC Class B
Optional Accessories	Lamp 456-8755H Ceiling Mount, Universal; RPM-U Filter; MU05611

Five (5) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply).Includes Dukane's FREE 1 year Peace-of-Mind Loaner

5YR