

8921H

ImagePro 8921H Portable LCD Projector



The ImagePro 8921H is a light (8.8lbs), easy-to-install portable LCD projector ideal for classroom or conference room.

8921H FEATURES

- 2600 Lumens Brightness
- XGA Resolution
- Lamp access on top
- High performance (2000 HR) hybrid filter with easy side access
- Lightweight, long life operation
- Monitor Loophrough
- Built-in Anti-theft security
- Audio "passthrough" permits use of sound system to play CDs on the PC when projector is off



NEW SIDE-LOADING HYBRID FILTER GIVES 2000 HOURS OF PROJECTOR PERFORMANCE

THE ALL NEW
DUKANE
Education. Presentation. Inspiration.

www.dukcorp.com




Convey by Dukane delivers control of classroom audio visual assets in sync with our Student Response System. Experience tomorrow's classroom today with Convey.

Visit www.convasystems.com.

Call Dukane: 800-676-2485

ImagePro 8921H Portable LCD projector

Back Panel Connections

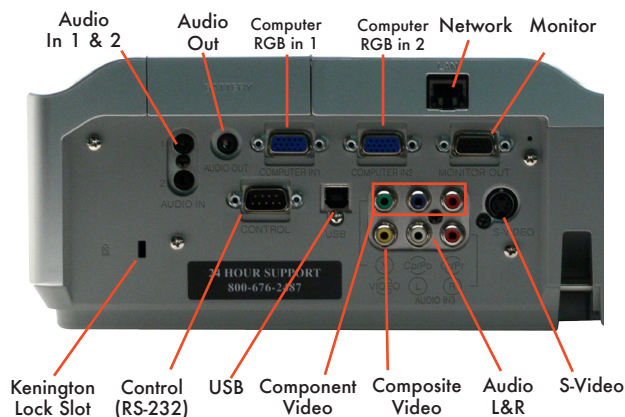

8921H Projection Table

- XGA (1024 x 768) resolution
- 2600 ANSI lumens of brightness
- Whiteboard & Blackboard Modes
- Easy maintenance in ceiling mount with lamp access on top & 2000 hour filter with side access
- Monitor loopthrough & remote mouse control
- Remote control with "My Buttons"
- Built-In Anti-theft security
- Audio passthrough for sound when projector is off
- Auto Vertical keystone correction
- HDTV ready
- Lock slot, security bar and transition detector
- Five Year Warranty and One Year Peace of Mind

8921H Projection Table

Image Size 4:3		Throw Distance	
Diagonal	Width	Min.	Max.
Inches	Inches	Feet	Feet
30	24	2.8	3.4
60	48	5.8	7.0
80	64	7.8	9.3
100	80	9.8	11.7
120	96	11.7	14.1
150	120	14.7	17.6
200	160	19.5	23.5
300	240	29.3	35.3

Throw Ratio (distance to width) 1.46 1.75

DUKANE

Dukane Corporation
Audio Visual Products Division
2900 Dukane Drive
St. Charles, Illinois 60174
800-676-2485
630-584-5156
avsales@dukcorp.com
www.dukcorp.com/av



toll-free
fax
e-mail

ImagePro is a registered trademark of Dukane Corporation
#11700-L-06

Specifications

8921H

Image Element	0.63" polysilicon active-matrix TFT x3
Brightness	2600 ANSI lumens (2100 lumens in Whisper Mode)
Resolution	1024 x 768 pixels (H X V), XGA
Contrast	500:1
Scanning Frequency	fh 15 -106 kHz, fv 50-120 Hz
Lens	Manual zoom (F2.3 - 2.5), 1.2X
Lens Throw Ratio	1.46 - 1.75:1 throw distance to image width
Keystone Correction	Digital, vertical +/-30 deg
Aspect Ratio	4:3, 16:9 selectable
Computer Compatibility	SVGA, VGA, XGA, SXGA, UXGA MAC13" and MAC16"
Video Compatibility	NTSC, NTSC4.43, PAL, SECAM, PAL-M, PAL-N, HDTV (1080i, 720p, 576i, 480i/p)
Component Video, Image Control	Freeze function, electronic magnification and pan
Mouse Control	Using USB
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	220W UHB
Lamp Life (whisper mode)	3000 hours (typical) 4000 hours
Audio	1 speaker 7 watt
Throw Distance	34" to 423"
Screen Size, diagonal	30" to 300"
Inputs, Video	(1) Component, RCA x 3 (1) S-video, Mini DIN 4-pin (1) Composite video, RCA x 1
Inputs, Computer	(2) RGB, 15 pin D-sub
Inputs, Audio	(2) Stereo mini jack: for PC/Access. (1) RCA x 2 (for video)
Outputs, Audio	(1) Stereo mini jack, adjustable
Outputs, Monitor	RGB, 15 pin D-sub
Outputs, Control	RS-232, 9 pin D-sub USB (Mouse control)
Network Connection	LAN Port, RJ-45
Security	Kensington lock slot & Security Bar
Fan Level	39dB, ultra quiet; 34dB Whisper Mode
Closed Caption	CCI, CC2, CC3, CC4, T1,T2,T3,T4
Operating Temperature	41-95 deg F
Power	AC 100-120V, AC 220-240V 50/60 Hz, 320 watt
Size (WxHxD)	13.4" x 3.9" x 10.6"
Weight	8.8 lbs.
Shipping Weight	18 lbs.
Carton Size	19" x 14" x 10"
Accessories Included	Remote control, batteries, power cord, RGB cable, RCA video cable, operators manual and soft carry case.
Safety	UL/C-UL, FCC Class B
Optional Accessories	Lamp 456-8755H Ceiling Mount, Universal; RPM-U Filter; MU05611

Five (5) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 1 year Peace-of-Mind Loaner Program.

5YR