

8954H

ImagePro 8954H Portable LCD Projector



The ImagePro 8954H features a high light output for brighter images. Ideal for conference or classroom use.

8954H FEATURES

- 4000 Lumens Brightness
- XGA Resolution
- Lamp access on top
- High performance (5000 HR) hybrid filter with easy side access
- 16 Watt Speaker Output
- Built for long life operation
- Monitor Loophrough
- Built-in Anti-theft security
- Audio "passthrough" permits use of sound system to play CDs on the PC when projector is off

NEW SIDE-LOADING HYBRID FILTER GIVES 5000 HOURS OF PROJECTOR PERFORMANCE

THE ALL NEW
DUKANE
Education. Presentation. Inspiration.
www.dukcorp.com




Convey by Dukane delivers control of classroom audio visual assets in sync with our Student Response System. Experience tomorrow's classroom today with Convey. Visit www.conveyclassrooms.com.
Call Dukane: 855.280.4298

ImagePro 8954H

Portable LCD projector

Back Panel

Connections

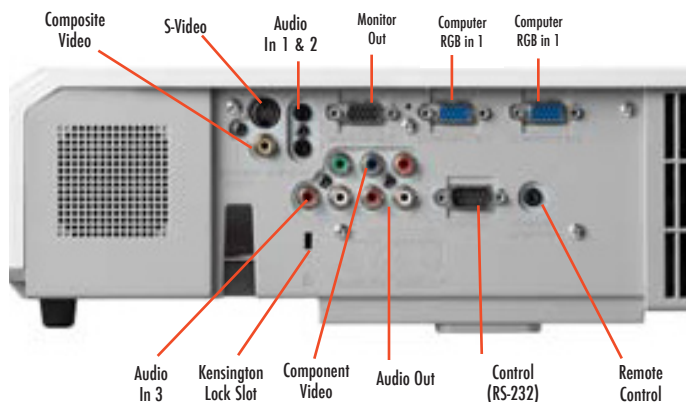

Key features:

- XGA (1024 x 768) resolution
- 4000 ANSI lumens of brightness
- Whiteboard & Blackboard Modes
- Easy maintenance in ceiling mount with lamp access on top & 5000 hour filter with side access
- Monitor loophrough & remote mouse control
- Remote control with "My Buttons"
- Built-In Anti-theft security
- Audio passthrough for sound when projector is off
- Auto Vertical keystone correction
- HDTV ready
- Lock slot, security bar and transition detector
- Five Year Warranty and One Year Peace of Mind Service

8954H Projection Table

Image Size 4:3		Throw Distance	
Diagonal	Width	Min.	Max.
Inches	Inches	Feet	Feet
30	24	2.8	3.4
60	48	5.8	7.0
80	64	7.8	9.3
100	80	9.8	11.7
120	96	11.7	14.1
150	120	14.7	17.6
200	160	19.5	23.5
300	240	29.3	35.3

Throw Ratio (distance to width) 1.5 1.8

DUKANE

Dukane Corporation
 Audio Visual Products Division
 2900 Dukane Drive
 St. Charles, Illinois 60174
 800-676-2485
 630-584-5156
 avsales@dukcorp.com
 www.dukcorp.com/av

ImagePro is a registered trademark of Dukane Corporation
 #09082 - 8954H



Specifications 8954H

Image Element	0.63" polysilicon active-matrix TFT x3
Brightness	4000 ANSI lumens (3500 lumens in Whisper Mode)
Resolution	1024 x 768 pixels (H X V), XGA
Contrast	2000:1 with active iris
Scanning Frequency	fh 15 -106 kHz, fv 50-120 Hz
Lens	Manual zoom (F1.6 - 1.8), 1.2X
Lens Throw Ratio	1.5 - 1.8:1 throw distance to image width
Keystone Correction	Digital, vertical +/-40 deg
Aspect Ratio	4:3, 16:9 selectable
Computer	SVGA, VGA, XGA, SXGA, UXGA
Compatibility	MAC13" and MAC16"
Video Compatibility	NTSC, NTSC4.43, PAL, SECAM, PAL-M, PAL-N, Component Video, HDTV (1080i/p, 720p, 576i, 480i/p)
Image Control	Freeze function, electronic magnification and pan
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	260W UHB
Lamp Life	2000 hours (typical) 4000 hours (whisper mode)
Audio	2 speaker 16 watt
Throw Distance	34" to 423"
Screen Size, diagonal	30" to 300"
Inputs, Video	(1) Component, RCA x 3 (1) S-video, Mini DIN 4-pin (1) Composite video, RCA x 1
Inputs, Computer	(2) RGB, 15 pin D-sub
Inputs, Audio	(2) Stereo mini jack: for PCI & 2. (1) RCA x 2 (for video)
Outputs, Audio	(1) RCA X 2, adjustable
Outputs, Monitor	RGB, 15 pin D-sub
Outputs, Control	RS-232, 9 pin D-sub USB (Mouse control)
Security	Kensington lock slot & Security Bar
Fan Level	35dB, ultra quiet; 29dB Whisper Mode
Closed Caption	CCI, CC2, CC3, CC4, T1,T2,T3,T4
Operating Temperature	41-95 deg F
Power	AC 100-120V, AC 220-240V 50/60 Hz, 390 watt
Size (WxHxD)	15.7" x 4.5" x 12.5"
Weight	9.2 lbs.
Shipping Weight	19 lbs.
Carton Size	18" x 12" x 15"
Accessories Included	Remote control, batteries, power cord, RGB cable, RCA video cable, operators manual and security label.
Safety	UL/C-UL, FCC Class B
Optional Accessories	Lamp 456-8954H Ceiling Mount, Universal; RPM-U Filter; MU06641

Five (5) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 1 year Peace-of-Mind Loaner Program.

5YR