




105S

1:5 s-Video Distribution Amplifier



The Kramer **105S** is a high-performance s-Video (Y/C) distribution amplifier. It takes one input, provides correct buffering and isolation, and distributes the signal to five identical outputs.

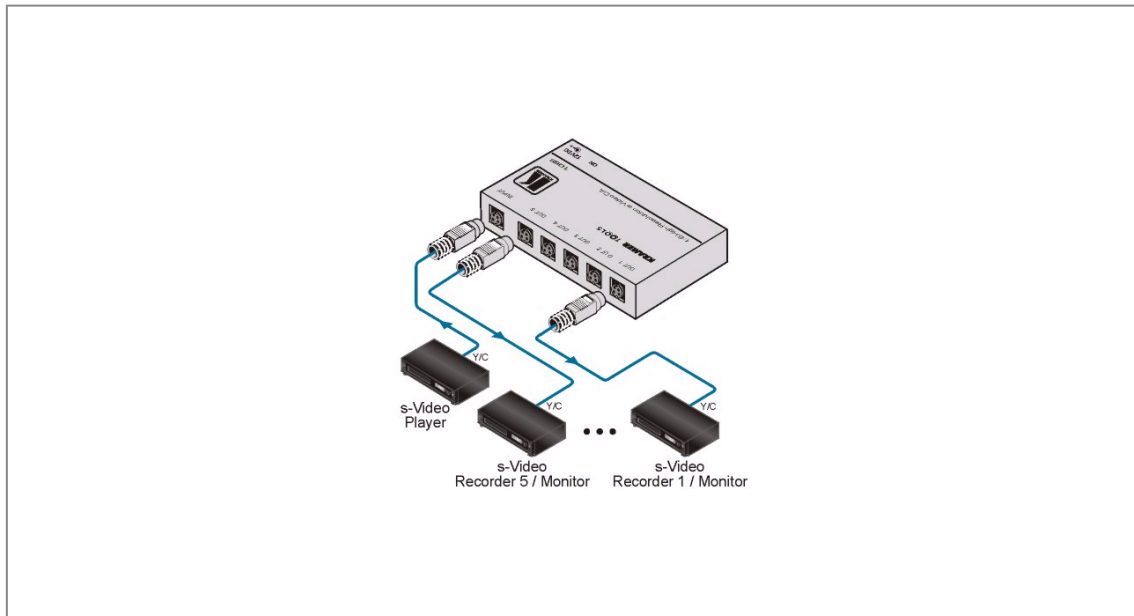



105S

FEATURES

- Bandwidth (Y) - 230MHz (-3dB).
- Compact Kramer TOOLS™3 units can be rack mounted side-by-side in a 1U rack space with the optional RK-3T rack adapter.

TECHNICAL SPECIFICATIONS

INPUT:	1 s-Video: 1Vpp/75Ω (Y), 0.3Vpp/75Ω (C), on a 4-pin connector.
OUTPUTS:	5 s-Video: 1Vpp/75Ω (Y), 0.3Vpp/75Ω (C), on 4-pin connectors.
MAX. VIDEO OUTPUT:	2Vpp (Y).
VIDEO BANDWIDTH	230MHz (Y).
(-3dB):	
DIFF. GAIN:	0.08%.
DIFF. PHASE:	0.12Deg.
K-FACTOR:	<0.05%.
S/N RATIO:	72dB.
COUPLING:	AC.
POWER SOURCE:	12V DC, 100mA.
DIMENSIONS:	12cm x 7.5cm x 2.5cm (4.7" x 2.95" x 0.98") W, D, H.
WEIGHT:	0.28kg (0.62lbs) approx.
ACCESSORIES:	Power supply, mounting bracket.
OPTIONS:	RK-3T 19" rack adapter.