




ELECTRONIC - 5X1 STEREO-AUDIO SWITCHER

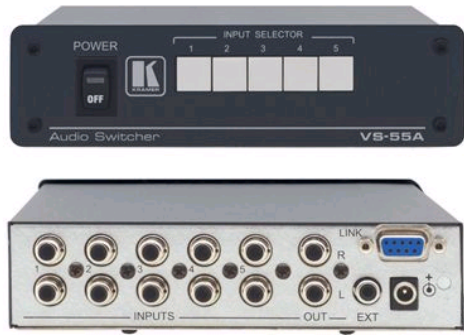

SPECIFICATIONS

INPUTS:	5 audio stereo - 1Vpp/50 kΩ on RCA connectors.
OUTPUT:	1 audio stereo - 1Vpp/100Ω on RCA connectors.
MAX AUDIO OUTPUT:	3 Vpp/100Ω.
AUDIO BANDWIDTH (-3DB):	100kHz.
GAIN RANGE:	60dB (via underside accessible trimmers).
AUDIO S/N RATIO:	Better than 78dB.
CONTROL:	5 front-panel touch switches, contact closure via the link connector.
THD:	Less than 0.08%.
POWER SOURCE:	12VDC, 100mA.
DIMENSIONS:	16.5cm x 12cm x 4.5cm (6.5" x 4.7" x 1.8", W, D, H.).
WEIGHT:	0.62kg. (1.4 lbs.) approx.
ACCESSORIES:	12VDC power supply.
OPTIONS:	RK-50RN, 19 inch rack adapter.

DESCRIPTION

The VS-55A is high performance switcher for unbalanced stereo audio signals. It switches any one of five signals to a single output.

- S/N Ratio - > 78dB.
- Control - Front panel & contact closure (via link connector).
- Desktop Size - Compact size. Two units can be rack mounted side-by-side in a 1U rack space with the optional RK-50RN adapter.

