



## 8X2:3 IN-CTRL™ STEREO AUDIO COMPANION SWITCHER FOR THE VP27(XL) DUAL SCALER SEAMLESS SWITCHER

---




### DESCRIPTION

The Kramer VP-727A is a high performance audio switcher for unbalanced stereo audio signals. The unit switches unbalanced stereo audio to the selected preview and program outputs.

- Stand alone or VP-727(xl) companion switcher.
- Inputs - 8 stereo audio on RCA connectors.
- Outputs - 1 preview output on dual RCA (stereo audio) connectors and 3 program outputs on dual RCA (unbalanced stereo), terminal block (balanced stereo) and a single RCA (S/PDIF) connectors.
- Headphone Output - Program or preview (selectable).
- Level Control - Each input and output.
- Take Button - For executing preview to program switching (with the option to either CUT or FADE (mix) between the audio sources).
- Front Panel Lockout.
- Preview & Program Mute Buttons.
- Audio-Follow-Video - When connected to the VP-727(xl).
- Proc Amp - Base, treble, balance & delay (per input).
- Flexible Control - Front Panel, RS-232 and RS-485 (to connect to VP-727(xl) and VP-727T T-Bar controller).
- Worldwide Power Supply - 100-240V AC.
- Standard 19" Rack Mount Size - 1U. Rack "ears" included.

**VP-727A**

**8X2:3 IN-CTRL™ STEREO AUDIO COMPANION SWITCHER FOR THE VP27(XL) DUAL SCALER SEAMLESS SWITCHER**

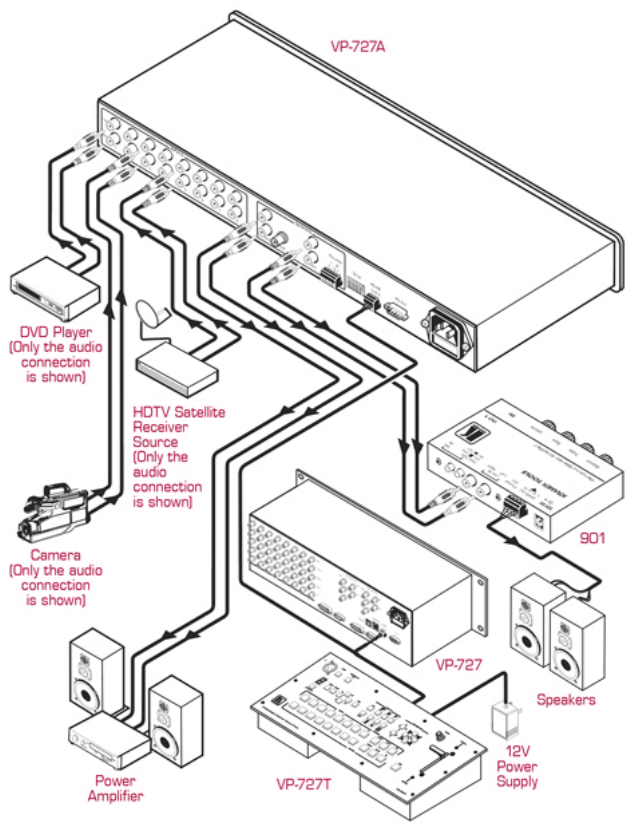

**SPECIFICATIONS**

INPUTS:	8 unbalanced stereo on RCA connectors
OUTPUTS:	1 Program and 1 Preview stereo unbalanced outputs on RCA connectors 1 Program balanced output on a 5-pin terminal block connector 1 Headphone output on a 6.5mm jack 1 Program S/PDIF output on an RCA connector
MAX. OUTPUT LEVEL:	>4.5Vpp
BANDWIDTH (-3DB):	>22kHz
S/N RATIO:	>85dB
CROSSTALK @1KHZ (ALL HOSTILE):	Program: <-88dB Preview: <-92dB Balanced: <-88dB Phones (Preview): <-82dB Phones (Program): <-80dB
CONTROLS:	Preview level: <-72dB to 62dB in and out Program level: <-73dB to 45dB in and out Program bass: 0dB to 27dB @100kHz Program treble: 0dB to 11dB @10kHz Program balance: -18dB to 0dB Program balanced (+/-) level: <-80db to 47dB Phones level (preview and program level): <-80dB to 57dB
COUPLING:	AC, input and output
AUDIO THD + NOISE:	Program: 0.02%; Preview: 0.002%; Program phones: 0.034%; Preview phones: 0.018%
AUDIO 2ND HARMONIC:	Preview phones: 0.03%; Program phones: 0.04%; Preview: 0.04%; Program balanced: 0.04%
POWER SOURCE:	100-240 VAC, 50/60 Hz; 10VA
DIMENSIONS:	19-inch (W), 7-inch (D) 1U (H) rack-mountable
WEIGHT:	2.7kg (6lbs.) approx.
ACCESSORIES:	Power cord, Null modem adapter, Windows®-based Kramer control software