


## Fully Loaded High-Definition

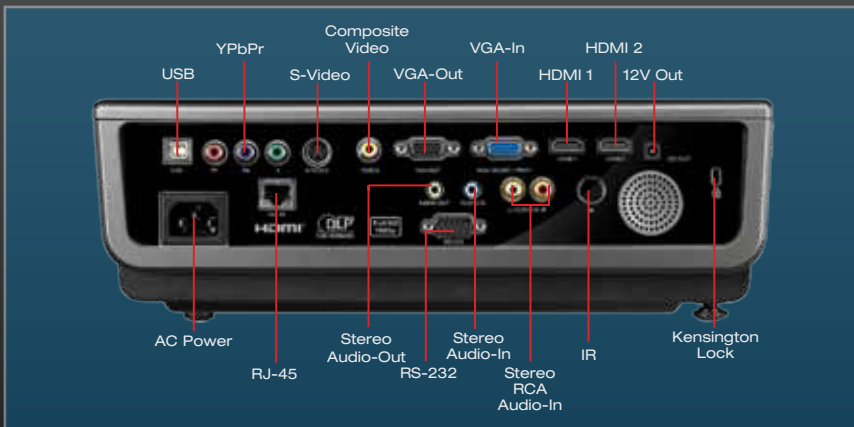

The Optoma TH1060P, a native 1080p high-definition DLP projector, delivers clear widescreen images to ensure that your audience experiences the full impact of your message. Bright enough for use in large conference rooms and classrooms, the Optoma TH1060P includes a wide range of analog and digital connectivity options for your high-resolution sources. With the Crestron RoomView® user-friendly interface, you can easily monitor, manage and control the Optoma TH1060 remotely via RJ45 connectivity.

### TH1060P FEATURES


- ❑ HD Native (1920X1080) DLP® by Texas Instruments with BrilliantColor™ Technology
- ❑ Bright images and high contrast ratio – 4500 ANSI lumens and 2500:1 contrast ratio (full on/full off)
- ❑ Presentation-friendly IR remote with USB mouse function and laser pointer
- ❑ Crestron RoomView® for projector management and control via RJ45 connection
- ❑ Environmentally-friendly – consumes <1 watt of power in standby mode
- ❑ Includes closed captioning

# TH1060P | HD 1080p Projector

## Projection Distance/Image Size

Projection Distance (Feet)	Maximum Diagonal (Inches)	Minimum Diagonal (Inches)
6	52	43
8	69	58
10	87	72
12	104	87
14	121	101
16	139	115
18	156	130

## Control Panel

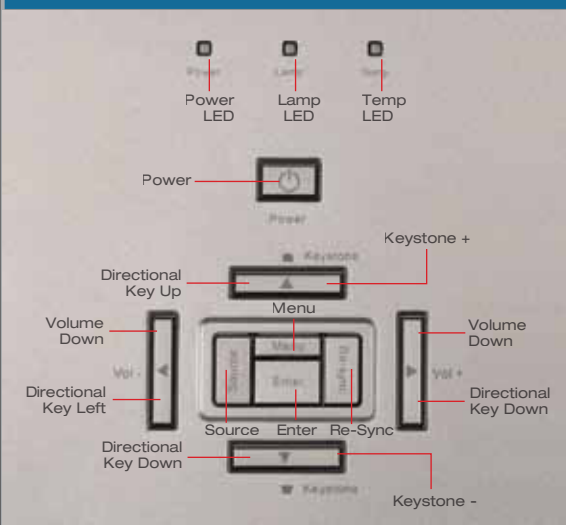

## Optional Accessories

Lamp:	BL-FS300C
Mount:	BM-5001U
Remote:	BR-5033L
Carrying Case:	BK-4013
HDMI Cable (7.5m):	BC-DDHMX08
HDMI Cable (5m):	BC-HMHMX05
Component to VGA Adapter:	BC-CRVGYX00
Component Cable (2m):	BC-CRCRXX02
Composite Cable (2m):	BC-COCOXX02
92" 16:9 Manual Pull-Down Screen:	DS-9092PMG+
Power Cord (11m):	BC-PUPIXY11


## Specifications

Display Technology:	Single 0.65" DC2 DMD DLP® Technology by Texas Instruments
Resolution:	HD (1920 x 1080)
Brightness (Typical):	4500 ANSI Lumens
Contrast Ratio:	2500:1 (Full On/Full Off)
Lamp Type:	300W P-VIP
Lamp Life (STD/Bright)*:	Estimated at 3000/2000 Hours
Throw Ratio:	1.59 to 1.91:1 (Distance/Width)
Image Size (Diagonal):	23.6" to 300" (0.6 to 7.62 m)
Projection Distance:	3.28' to 32.8' (1.0 to 10 m)
Noise Level (STD/Bright):	28dB/30dB
Remote Control:	IR Remote Mouse with Laser Pointer
Computer Compatibility:	HD, UXGA, WXGA, SXGA+, SXGA, XGA, SVGA, VGA Resized, VESA, PC and Macintosh Compatible
Video Compatibility:	NTSC, PAL, SECAM, SDTV (480i), EDTV (480p), HDTV (720p, 1080i/p)
Aspect Ratio:	16:9 Native, 4:3 & 16:10 Compatible
Projection Lens:	F=2.5-2.76, f=23.5-28.2 mm, 1.2x Manual Zoom & Focus
Offset:	115%
Loop Through:	Monitor: D-Sub 15-Pin VGA Output (Functional in Both Normal and Standby Modes)
Audio:	3-Watt Stereo Speaker
Keystone Correction:	± 15° Vertical
Vertical Refresh Rate:	50 to 85 Hz
Horizontal Scan Rate:	15, 31 - 90 KHz
Power Supply:	AC Input 100-240V, 50-60 Hz, Auto-Switching
Power Consumption:	380 Watts Max (Bright), 320 Watts (STD) <1 Watt (Standby)
Weight:	7.8 lbs (3.53 kg)
Dimensions (W x H x D):	12.8" x 4.29" x 10.19" (326 x 109 x 259 mm)
Operating Temperature:	41° to 104°F (5° to 40°C), 85% Max Humidity, Adjustable Fan Speed for High Altitude Application
Displayable Colors:	1.07 Billion
Projection Method:	Front, Rear, Ceiling Mount, Table Top
Uniformity:	85%
Security:	Kensington® Lock and Keypad Lock
I/O Connectors:	Two HDMI, VGA-In, VGA-Out, Component, S-Video, Composite Video, Stereo RCA Audio-In, Stereo Audio-In, Stereo Audio-Out, +12V Trigger, USB, RS-232 and RJ45
Standard Accessories:	AC Power Cord, VGA to VGA Cable, Remote Control, Batteries for Remote, Carrying Case, Lens Cap, Multilingual CD-ROM User's Manual, Quick Start Card and Warranty Card
Optional Accessories:	HDMI Cable, Ceiling Mount, VGA to Component Cable, S-Video Cable, Composite Video Cable, RS-232 Cable and Panoview™ Series Screens
Warranty:	Three-Year Optoma Express Replacement Service, One-Year on Lamp
UPC:	796435 41 719 2

[www.optoma.com](http://www.optoma.com)

\*Lamp life is dependent upon many factors, including lamp mode, display mode, usage, environmental conditions and more. Lamp brightness can decrease over time.

**Optoma**



All Specifications are subject to change without notice. ©2011 Optoma Technology, Inc. DLP® and the DLP logo are registered trademarks of Texas Instruments. All other names mentioned herein are property of their respective owners.