


TX779 | Multimedia Projector

Projection Distance/Image Size

Projection Distance (Feet)	Maximum Diagonal (Inches)	Minimum Diagonal (Inches)
6	50	43
8	67	57
10	83	71
12	100	86
14	117	100
16	133	114
18	150	129

Control Panel

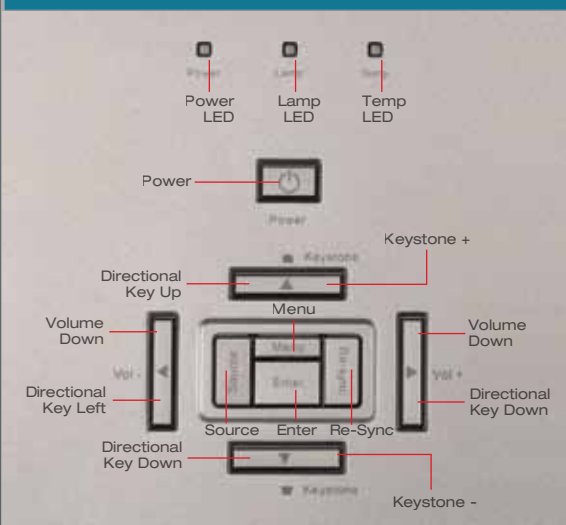

Optional Accessories

Lamp:	BL-FP280E
Mount:	BM-5001U
Wireless Module:	BI-EXTGB
Remote:	BR-5033L
Carrying Case:	BK-4013
HDMI Cable (7.5m):	BC-DDHMXX08
HDMI Cable (5m):	BC-HMHMXX05
Component to VGA Adapter:	BC-CRVGYX00
Component Cable (2m):	BC-CRCRXX02
Composite Cable (2m):	BC-COCOXX02
100" 4:3 Manual Pull-Down Screen:	DS-3100PMG+
Power Cord (11m):	BC-PUPIXY11

Specifications

Display Technology:	Single 0.7" DC3 DMD DLP® Technology by Texas Instruments
Native Resolution:	XGA (1024 x 768)
Brightness (Typical):	4500 ANSI Lumens
Contrast Ratio:	3000:1 (Full On/Full Off)
Lamp Type:	280W P-VIP
Lamp Life (STD/Bright)*:	Estimated at 3000/2000 Hours
Throw Ratio:	1.8 to 2.1:1 (Distance/Width)
Image Size (Diagonal):	23.4" to 300" (0.59 to 7.62 m)
Projection Distance:	3.28' to 32.8' (1.0 to 10 m)
Noise Level (STD/Bright):	28dB/30dB
Remote Control:	IR Remote Mouse with Laser Pointer
Computer Compatibility:	HD, UXGA, WXGA, SXGA+, SXGA, XGA, SVGA, VGA Resized, VESA, PC and Macintosh Compatible
Video Compatibility:	NTSC, PAL, SECAM, SDTV (480i), EDTV (480p), HDTV (720p, 1080i/p)
3D Compatibility:	120Hz Frame Sequential 3D for Resolutions Up to 720p, 60Hz Field Sequential 3D for Resolutions Up to 480i
Aspect Ratio:	4:3 Native, 16:9 Compatible
Projection Lens:	F=2.6-2.81, f=26.9-29.8 mm, 1.15x Zoom & Focus
Offset:	112%
Monitor Loop Through:	D-Sub 15-Pin VGA Output (Functional in Both Normal and Standby Modes)
Audio:	3-Watt Speaker
Keystone Correction:	± 30° Vertical
Vertical Refresh Rate:	50 to 120 Hz
Horizontal Scan Rate:	15, 31 - 90 KHz
Power Supply:	AC Input 100-240V, 50-60 Hz, Auto-Switching
Power Consumption:	360 Watts Max (Bright), 290 Watts (STD) <1 Watt (Standby)
Weight:	7.8 lbs (3.53 kg)
Dimensions (W x H x D):	12.8" x 4.29" x 10.19" (326 x 109 x 259 mm)
Operating Temperature:	41° to 104°F (5° to 40°C), 85% Max Humidity, Adjustable Fan Speed for High Altitude Application
Displayable Colors:	1.07 Billion
Projection Method:	Front, Rear, Ceiling Mount, Table Top
Uniformity:	85%
Security:	Kensington® Lock and Keypad Lock
I/O Connectors:	HDMI, Two VGA-In, VGA-Out, DVI-D, S-Video, Composite Video, Stereo RCA Audio-In, Stereo Audio-In, Stereo Audio-Out, +12V Trigger, USB, RS-232 and RJ45
Standard Accessories:	AC Power Cord, VGA to VGA Cable, Remote Control, Batteries for Remote, Carrying Case, Lens Cap, Multilingual CD-ROM User's Manual, Quick Start Card and Warranty Card
Optional Accessories:	HDMI Cable, Ceiling Mount, VGA to Component Cable, S-Video Cable, Composite Video Cable, RS-232 Cable and Panoview™ Series Screens
Warranty:	Three Years Optoma Express Replacement Service, One Year on Lamp
UPC:	796435 11 271 4

www.optoma.com

*Lamp life is dependent upon many factors, including lamp mode, display mode, usage, environmental conditions and more. Lamp brightness can decrease over time.

Optoma



All Specifications are subject to change without notice. ©2010 Optoma Technology, Inc. DLP® and the DLP logo are registered trademarks of Texas Instruments. All other names mentioned herein are property of their respective owners.