


# Redefining Versatility and Functionality

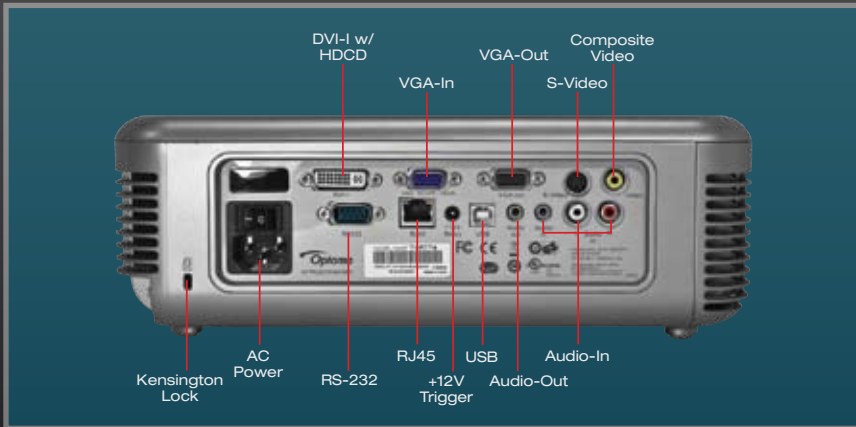

## TXR774 FEATURES

- ❑ Native XGA resolution, HD compatible
- ❑ Exceptional brightness at 4300 lumens
- ❑ Presentation friendly IR remote with laser pointer
- ❑ Features a DLP chipset and BrilliantColor technologies from Texas Instruments
- ❑ Extensive connectivity such as DVI, VGA, s-video, composite, RS-232, USB and RJ45
- ❑ Manage the projector via network connection
- ❑ Includes closed captioning


With a brightness level of 4300 lumens, as well as a DLP® chipset and BrilliantColor™ technologies from Texas Instruments, the Optoma TXR774 delivers exceptionally bright and crisp images. The Optoma TXR774 features networking options and extensive connectivity options which make it an ideal projection product for demanding environments. The TXR774 redefines versatility.

# TXR774 Multimedia Projector

## Projection Distance/Image Size

Projection Distance (Feet)	Maximum Diagonal (Inches)	Minimum Diagonal (Inches)
3.3	26.0	22.6
11.2	88.5	76.8
18	143.2	124.2
25.3	200.5	173.8
32.8	260.4	225.8

## Control Panel

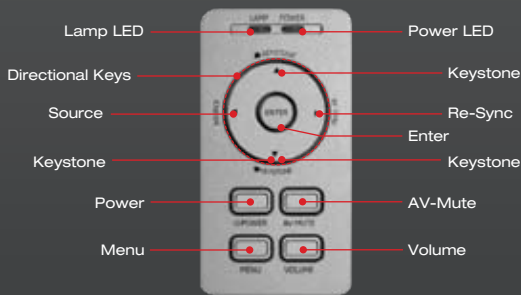

## Optional Accessories

Lamp:	BL-FU280A
Remote:	BR-5022L
VGA to VGA Cable (2m):	BC-VGVGXX02
Power Cord (1m):	BC-PUPIX01
S-Video Cable (2m):	BC-SVSVXX02
Composite Cable (1.8m):	BC-COCOX02
VGA to Component Cable (2m):	BC-VGCRXX02
DVI Cable (2m):	BC-DIDIX02
DVI to HDMI Adapter:	BC-DIHMXY00
Carrying Case:	BK-4016
Minijack to RCA Audio Adapter:	BC-MJADXY00
100" 4:3 Manual Pull-Down Screen:	DS-3100PM

## Specifications

Display Technology:	Single 0.7" DarkChip3™ DMD™ DLP Technology by Texas Instruments
Resolution:	Native XGA (1024 x 768)
Maximum Resolution:	UXGA (1600 x 1200)
Brightness (Typical):	4300 ANSI Lumens
Contrast Ratio:	3000:1 (Full On/Full Off)
Lamp Type:	280W UHP
Lamp Life (STD/Bright):	Estimated at 3000/2000 Hours
Throw Ratio:	1.8 to 2.1:1 (Distance/Width)
Image Size (Diagonal):	24" to 306" (0.60 to 7.77 m)
Projection Distance:	3.3' to 36.7' (1.0 to 11.1 m)
Noise Level (STD/Bright):	30dB/32dB
Remote Control:	Fully Featured Remote with Mouse and Laser Pointer
Monitor Loop Through:	D-Sub 15 VGA Output (Functional in Both Normal and Standby Modes)
Computer Compatibility:	VGA, SVGA, XGA, SXGA+, UXGA, VESA, PC and Macintosh Compatible
Video Compatibility:	NTSC, PAL, SECAM, SDTV (480i), EDTV (480p), HDTV (576i/p, 720p, 1080i/p)
Aspect Ratio:	4:3 Native, 16:9 Compatible
Projection Lens:	F=2.6-2.81, f=26.01-29.84 mm, 1.15x Manual Zoom and Focus
User Controls:	Complete On Screen Menu Adjustments in 22 Languages
Audio:	One 3-Watt Speaker
Keystone Correction:	± 30° Vertical
Vertical Refresh Rate:	50 to 85 Hz
Horizontal Scan Rate:	15 kHz, 31 to 90 kHz
Power Supply:	AC Input 100 - 240V, Auto-Switching
Power Consumption:	350 Watts (Maximum), <6 Watts (Standby)
Weight:	8.2 lbs (3.7 kg)
Dimensions (W x H x D):	11.8" x 3.9" x 9.6" (300 x 100.5 x 244 mm)
Operating Temperature:	41-104°F (5-40°C) (85% Humidity), Adjustable Fan Speed for High Altitude Application
Displayable Colors:	134.2 Million
Projection Method:	Front, Rear, Ceiling Mount, Table Top
Uniformity:	85%
Security:	One Kensington® Lock Port
I/O Connectors:	DVI-I w/HDCP, Composite Video, VGA-In, S-Video, Two Audio-In, USB, VGA-Out, Audio-Out, RJ45, +12V Trigger, RS-232
Standard Accessories:	AC Power Cord, VGA to VGA Cable, Composite Video Cable, USB Cable, Remote Control, Batteries for Remote, Carrying Case, Quick Start Guide, Warranty Card and CD-ROM User's Manual
Optional Accessories:	Ceiling Mount, S-Video Cable, VGA to Component Cable, DVI to DVI Cable, DVI to HDMI Adapter and PanoView™ Series Screens
Warranty:	3 Years Optoma Express Replacement Service, 1 Year on Lamp
UPC:	796435 11 117 5

[www.OptomaUSA.com](http://www.OptomaUSA.com)



All Specifications are subject to change without notice. ©2009 Optoma Technology, Inc. DLP® and the DLP logo are registered trademarks of Texas Instruments. All other names mentioned herein are property of their respective owners.