

MULTIMEDIA PROJECTOR

X605



BRILLIANT PRESENTATIONS WITH MAXIMUM INSTALLATION FLEXIBILITY



Bright crystal clear images for large venue applications



Unsurpassed color accuracy for the most impactful presentations



Vertical and horizontal lens shift for ease of installation



Optional lenses for maximum installation flexibility

PRO|SCENE



The Optoma X605 was designed to deliver extraordinary performance and superior reliability to satisfy your large venue projector install needs. Its powerful 6000 lumens bright output combined with a remarkable 2000:1 contrast ratio deliver amazingly bright, color-rich presentations with sharp, clear text and graphics. The Optoma X605 features one the most comprehensive input panels and most advanced feature set its class to ensure the projector will satisfy your current and future needs. HDMI, display port and DVI for digital connectivity, 2 VGA inputs and one VGA out for analog content, vertical and horizontal lens shift, discrete audio inputs, 12 volt trigger for maximum installation convenience. Just a few of the many outstanding features on this remarkable product.

LENS THROW OPTIONS

| | Short Throw | Standard Throw | Long Throw |
|------------------------------|--------------------------------|----------------------------------------------------------|--------------------------------------------------------|
| Optoma Part Number | BX-DL080 | BX-DL200 | BX-DL300 |
| Throw Ratio (Distance/Width) | 0.8:1 | 1.6 to 2.0:1 | 2.0 to 3.0:1 |
| Projection Distance | 1.6' to 9.8' (0.5 to 3m) | 4.9' to 23.0' (1.5 to 7m) | 6.6' to 65.6' (2 to 20m) |
| Image Size (Diagonal) | 28.0" to 171" (0.71 to 4.34m) | 34.2" to 200" (0.87 to 5.08m) | 30.6" to 457" (0.78 to 11.6m) |
| Projection Lens | F=2.5, f=11.5 mm, Manual Focus | F=2.46-2.56, f=22.8-28.5 mm, 1.25x Manual Zoom and Focus | F=2.5-3.1, f=28.5-42.75 mm, 1.5x Manual Zoom and Focus |
| Weight w/ Projector | 19.1 lb (8.6 kg) | 18.9 lb (8.6 kg) | 18.9 lb (8.6 kg) |

MULTIMEDIA PROJECTOR — X605

OPTICAL/TECHNICAL SPECIFICATIONS

| | |
|---------------------------------|-----------------------------------------------------------------------------------------|
| Display Technology | Single 0.55" DarkChip3™ DLP® Technology by Texas Instruments™ |
| Native Resolution | XGA (1024 x 768) |
| Maximum Resolution | WUXGA (1920 x 1200) |
| Brightness (Typical) | 6000 lumens |
| Contrast Ratio | 2000:1 (full on/full off) |
| Displayable Colors | 1.07 Billion |
| Lamp Life* and Type | 3500/1500 Hours (STD/bright), 330W P-VIP |
| Projection Method | Front, rear, ceiling mount, table top |
| Keystone Correction | ±30° Vertical |
| Uniformity | 85% |
| Aspect Ratio | 4:3 native, 16:9 compatible |
| Lens Shift (Telecentric) | Horizontal ±10% offset Vertical: -20~100% offset |
| Audio | Two 3-Watt speakers |
| Noise Level (STD) | 37dB |
| Remote Control | Fully-featured IR remote with the option to hardwire to the projector |
| Operating Conditions | 41–113°F (5–45°C), 85% max humidity, adjustable fan speed for high altitude application |
| Power Supply | AC Input 100–240V, 50–60Hz, auto-switching |
| Power Consumption | 480W max (bright), 330W (STD), <0.5W (standby) |

COMPATIBILITY SPECIFICATIONS


| | |
|-------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Computer Compatibility | WUXGA, UXGA, SXGA+, WXGA, SXGA, XGA, SVGA, VGA resized, VESA, PC and Mac compatible |
| Video Compatibility | NTSC, PAL, SECAM, SDTV (480i/576i), EDTV (480p/576p, HDTV (720p, 1080i/p) |
| 3D Compatibility[†] | Supports all HDMI 1.4a mandatory 3D formats (Frame pack, side-by-side, top-bottom) and up converts frame rate from 60Hz to 120Hz or 24Hz to 144Hz (i.e 60 or 72 frames per eye). 3D glasses are needed and are sold separately. Refer to user manual for details. |
| Vertical Scan Rate | 24–85kHz, 120Hz |
| Horizontal Scan Rate | 15–91kHz |
| User Controls | Complete on-screen menu adjustments in 26 languages |
| I/O Connection Ports | Display port, HDMI, DVI-D with HDCP, two VGA-in, VGA-out, S-video, composite video, component video, five BNC (RGBHV/YPbPr), two stereo mini jack audio-in, two RCA stereo audio-in, audio-out, 3D VESA port, wired remote, USB-A charging port, RS-232C, RJ45, and 12V trigger |
| Monitor Loop Through | <i>Monitor:</i> D-Sub 15 pin VGA output (functional in both normal and standby modes) <i>Audio:</i> VAO audio out, HDMI VAO audio out supported (VAO in normal mode, fixed in Standby) |

PHYSICAL SPECIFICATIONS

| | |
|-------------------------------|---------------------------------------------------|
| Security | Kensington® lock port, security bar & keypad lock |
| Weight | 18.6 lb (8.4 kg) w/o lens |
| Dimensions (W x D x H) | 16.9" x 7.1" x 13.4" (430 x 181 x 340 mm) |



1. Power LED Indicator
2. HDMI
3. DVI-D
4. Display Port
5. RJ45
6. 3D SYNC Out (5V)
7. USB Charging Port
8. VGA-In
9. Audio-In (VGA-1)
10. VGA 2-In
11. Audio-In (VGA-2)
12. VGA-Out
13. Audio-Out
14. BNC (RGBHV/YPbPr)
15. Component
16. RCA Audio-In
17. RS-232C
18. S-Video
19. Composite Video
20. RCA Audio-In
21. Wired Remote
22. 12V Trigger
23. Power

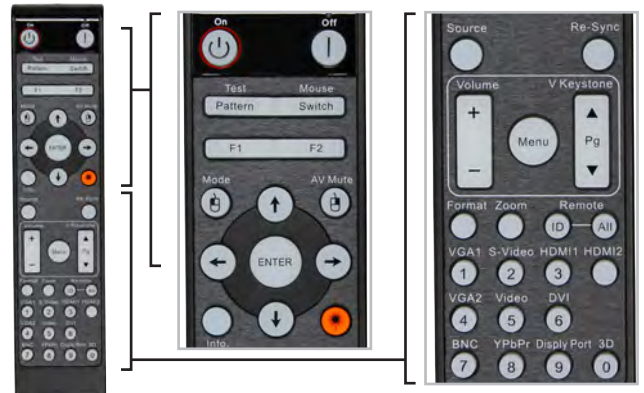

Warranty

3-Year Optoma Express Service, 1-Year on Lamp

In the Box

X605 projector, AC power cord, VGA to VGA cable, remote control, batteries for remote, CD-ROM user's manual, quick start card and warranty card (lens is not included)

Optional Accessories

Three optional lenses, wireless dongle, universal ceiling mount, HDMI cable, Optoma screen, RF 3D glasses, RF 3D emitter, DLP® Link™ 3D glasses, wireless HDMI system and single Cat6 HDBaseT kit

Accessory Part Numbers

| | |
|----------------------------------------------------------|-------------------------------------|
| Lamp: BL-FP370A | Wireless VGA Dongle: BI-EXTBG03 |
| Remote: BR-3070L | DLP® Link™ 3D glasses: ZD302 |
| RF 3D emitter: BC300 | RF 3D glasses: ZF2300GLASSES |
| Wireless HDMI system: WHD200 | Single-Cat6 HDBaseT kit: EVBMN-M110 |
| Universal ceiling mount: BM-5001U | Universal ceiling mount: OCM818W-RU |
| Universal ceiling mount (with extensional pole): OCM815W | |

UPC 796435 41 827 4

www.OptomaUSA.com

Optoma
Projector Expert

*Lamp-life is dependent on many factors, including lamp mode, display mode, usage, environmental conditions and more. Lamp brightness can decrease over time.

†3D content can be viewed with either RF or DLP Link active shutter glasses when projector is used with a compatible 3D player. RF 3D glasses require the use of an RF 3D emitter and a projector with a 3D VESA port. Please visit www.OptomaUSA.com for more information.

Copyright © 2014 Optoma Technology, Inc. DLP® and the DLP logo are registered trademarks of Texas Instruments™. All other trademarks are the property of their respective owners. All specifications subject to change at any time. 141007