



PowerLite® Pro G5200WNL

Astounding quality and reliability.

Lens not included

Designed with your installation needs in mind, the widescreen Epson PowerLite Pro G5200WNL offers the perfect solution for any auditorium, classroom or boardroom. With 4200 lumens and WXGA resolution, this powerful performer ensures amazing presentations. Engineered to interface and integrate more easily with sophisticated programming and controller applications — both IP and RS-232 — this product works with modules and drivers for industry-leading systems that can include touch-panel screens and multiple content devices.

Engineered to integrate with complex presentation systems, the PowerLite Pro G5200WNL includes a full feature set that makes installation easy and affordable. And, Epson monitoring software gives system administrators the power to monitor and control the projector remotely.

Add to that the easy maintenance features and you've got everything you need for brilliant presentations and a better bottom line. With one-touch filter removal and easy lamp access, the PowerLite Pro G5200WNL offers a low cost of ownership and added peace of mind. It even includes a closed captioning decoder, so there are no added costs to accommodate the hearing impaired. The Epson PowerLite Pro G5200WNL is the ideal choice for both executive boardrooms and educational institutions, with the value, power and performance for all your presentation needs.

Features/Benefits

- Amazing presentations in any classroom or boardroom — 4200 lumens, WXGA resolution (1280 x 800)
- Industry-leading system support — advanced connectivity: two computer RGB inputs, three component connections (5 BNC and HD15) and an HDMI digital port with HDCP
- Greater positioning flexibility — centered lens design, vertical/horizontal lens shift mechanism and standard lens with 1.8x wider zoom (lens sold separately)
- Closed captioning capabilities without any added costs — built-in decoder
- Direct On and Direct Off — power installed projectors off and on with the flip of an outlet switch
- Superior color and detail — 800:1 contrast ratio
- Greater installation flexibility with optional bayonet lenses — five easily exchangeable Epson lenses available; standard lens for ceiling-mounted applications (lens sold separately)
- Easy image setup — convenient Quick Corner® function
- Easy monitoring and control — RJ-45 with Epson monitoring software included
- Simple off-axis installation — 30-degree tilt operation
- Convenient maintenance features — fast, easy filter cleaning and replacement, easy side access to the lamp




G5200WNL Top



G5200WNL Remote



G5200WNL Front

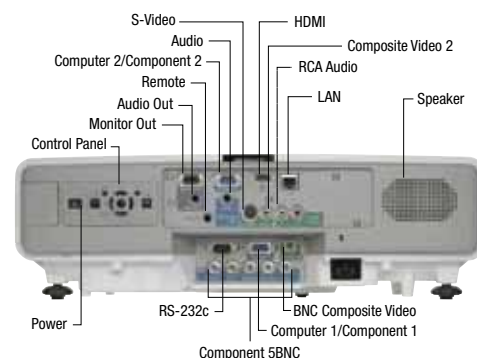

G5200WNL Back

Epson PowerLite Pro G5200WNL Specifications

Projection System

High-aperture Epson 3-chip 3LCD technology

Projection Method

Front/rear/ceiling mount

LCD

Driving Method

Epson Poly-silicon TFT Active Matrix

Pixel Number

1,024,000 pixel x 3 LCDs (1280 x 800)

Native Resolution

WXGA (1280 x 800)

Aspect Ratio

Supports 16:10, 4:3, 16:9

Pixel Arrangement

Cross stripe

Projection Lens

Type

Manual focus/zoom

F-number

1.64 – 2.5 (standard lens), lens not included

Focal Length

21.27 mm – 37.93 mm (standard lens)

Zoom Ratio

Optical zoom 1.0 – 1.8

Lamp

Type

275 W

Lamp Life*

2000 hours (High Brightness Mode)

3000 hours (Low Brightness Mode)

Screen

Throw Ratio Range

1.64" – 2.5"

Size (projected distance)

30" – 300"

Lens Shift

Vertical: ±60 degrees

Horizontal: ±10 degrees

Keystone Correction

Vertical: -40 degrees to +40 degrees

Horizontal: -20 degrees to +20 degrees

Brightness (High Brightness Mode)

Light output — white: up to 4200 lumens (ISO 21118)

Light output — color: up to 4200 lumens

Contrast Ratio (High Brightness, Game Mode)

Up to 800:1

Brightness Uniformity (typical)

86%

Color Reproduction

16.7 million colors

Dimensions (W x D x H)

Including Feet (with standard lens)

18.5" x 13.26" x 5.94"

Excluding Feet, Lens

18.5" x 12.27" x 5.31"

Weight

14.81 lb

Effective Scanning Frequency Range

Pixel Clock

13.5 MHz – 162 MHz (up to UXGA 60 Hz)

Horizontal

15 KHz – 99 KHz

Vertical

50 Hz – 120 Hz

Remote Control

Features

Source search selection, power, aspect resize, color

mode, volume, e-zoom, A/V mute, freeze, menu,

page up and down, help, auto, mouse functions, ID

Operating Angle

Right/left ± 60 degrees

Upper/lower ± 20 degrees

Rear ± 30 degrees

Operating Distance

40 ft

Display Performance

Native

1280 x 800

Resize

640 x 480

800 x 600

1280 x 1024

1400 x 1050

1600 x 1200

Video I/O

Display Performance

NTSC: 560 line

PAL: 560 line

(depends on observation of the multi-burst pattern)

Input Signal

NTSC/NTSC4.43/PAL/M-PAL/N-PAL/PAL60/

SECAM

SDTV: 480i, 480p; HDTV: 720p, 1080i

Pixel works: video chip

3D Y/C separation, noise reduction motion

compensated

Interface-Progressive conversion (2 – 2,

3 – 2 film detection)

Interfaces

Computer/component video: mini D-sub HD 15 pin x 2

5BNC component x1

HDMI x1

Hardwire remote jack x1

S-video: mini DIN x 1

Composite video RCA x 1, composite x 1 BNC

Audio in (RCA (L & R) x 1, mini stereo x 1)

Variable audio out: mini stereo x 1

LAN networking: RJ-45 x 1

Serial: RS-232c x 1

Monitor out: mini D-sub 15 pin x 1

Other Features

Audio Output

7 W monaural

Audio Signal

500 m Vrms/47K ohm

Operating Temperature

32 ° to 104 °F (0 ° to 40 °C)

Power Supply Voltage

100 – 240 V ±10%, 50/60 Hz AC

Power Consumption

423 W (Operation)

0.6 W standby (network off)

Fan Noise

37 dB (High Brightness Mode)

30 dB (Low Brightness Mode)

Security

Kensington®-style lock provision, anchor (metal) bar

for security lock or cable

Support — Epson Connection™

Pre-sales support

U.S. and Canada

800-463-7766

Internet website

www.epson.com

Projector resources available at

presentersonline.com

Service Programs

Three-year limited warranty, 90-day lamp warranty,

Epson Road Service Program and Epson PrivateLine®

dedicated toll-free support (U.S. and Canada only)

Contents

Power cable, computer cable, projector remote

control, batteries, cable cover, user manual CD, Easy

Management™ software CD, Quick Setup Sheet,

PrivateLine support card, password protection sticker

Accessory Part Numbers

Standard zoom lens <1.64 – 2.5> V12H004S03

Long throw zoom lens <1.84 – 2.32> V12H004L06

Middle throw zoom lens 1 <1.83 – 2.45> V12H004M04

Middle throw zoom lens 2 <1.83 – 2.53> V12H004M05

Rear projection wide lens <2.03> V12H004R03

Wireless mouse receiver for

remote control (ELPST16) V12H007T16

Air filter V13H134A17

Replacement lamp V13H010L46

Hardware remote control cable set V12H005C28

Replacement remote control 1485872

Advanced projector ceiling mount

with precision gear ELPMBPRG

High security projector ceiling mount ELPMBATA

Adjustable suspended ceiling channel kit ELPMBP01

False ceiling plate kit ELPMBP02

Structural round ceiling plate ELPMBP03

Adjustable extension column (pipe) 6" – 9" ELPMBP01

Kensington security lock ELPSC01

50-inch portable screen (4:3 aspect ratio) ELPSC06

60-inch portable pop-up screen

(4:3 aspect ratio) ELPSC07

80-inch portable pop-up screen

(4:3 aspect ratio) ELPSC08

Duet™ portable projector screen

(4:3/16:9 combination) ELPSC80

Component to VGA video cable ELPKC19

S-video cable ELPDV01

Distribution amplifier ELPDA01

Image presentation camera (ELPDC05) V12H162020

Projector Part Number

PowerLite Pro G5200WNL V11H298920

(Lens not included)

* Lamp life results will vary depending upon mode selected, environmental conditions and usage. Lamp brightness decreases over time.

Packaging Specifications

PowerLite Pro G5200WNL

Dimensions 19.9" x 25.3" x 12.2" (W x D x H)

Weight 23.3 lb

Replacement Lamp

Dimensions 6.3" x 5.6" x 5.6" (W x D x H)

Weight 0.97 lb

Master Carton

Dimensions 28.4" x 13.1" x 6.8" (W x D x H)

Weight 11.7 lb

Units Per Master Carton 10

Replacement Air Filter

Dimensions 11.14" x 3.59" x 1.73" (W x D x H)

Weight 0.21 lb

Master Carton

Dimensions 19.17" x 11.78" x 4.84" (W x D x H)

Weight 3.09 lb

Units Per Master Carton 10



Epson America, Inc.
3840 Kilroy Airport Way, Long Beach, CA 90806

Epson Canada, Ltd.
3771 Victoria Park Avenue, Toronto, Ontario M1W 3Z5

www.epson.com
www.epson.ca