




640R HDMI Over Coax Receiver



The **640R** is a high-performance receiver for HDMI and IR signals. The 640T converts an HDMI and IR signal to five coax signals and the **640R** converts them back into an HDMI and IR signal.

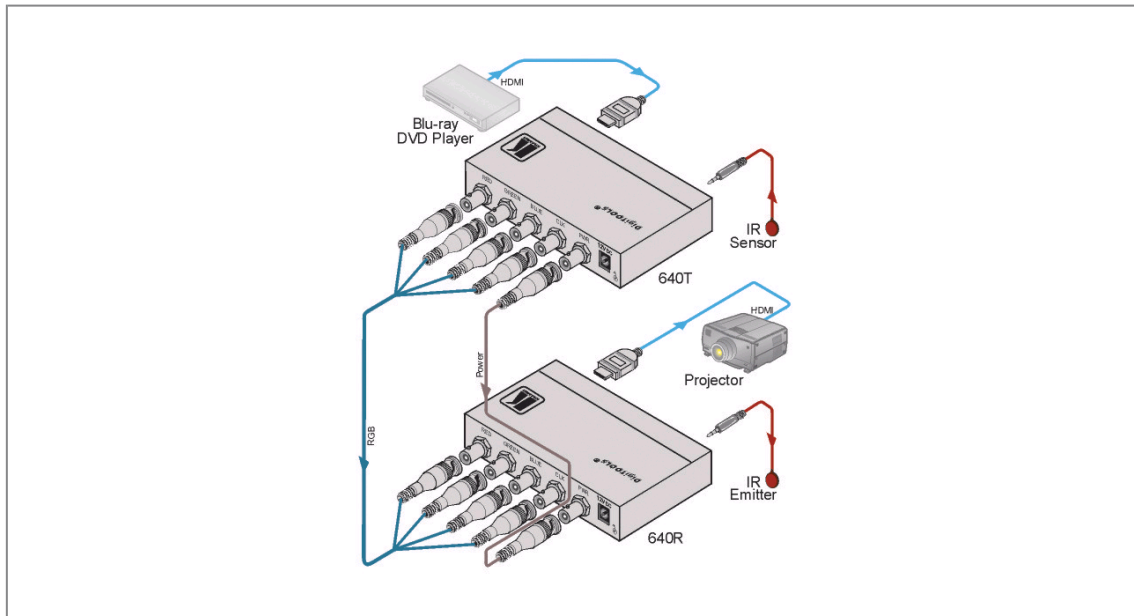



640R

FEATURES

- Max Data Rate - 3.4Gbps per channel.
- HDTV Compatible.
- HDCP Compliant
- Upgrades Legacy RGBHV Cabling to HDMI Signals.
- IR Transmission and Bi-directional Support for Remote IR Device.
- System Range - Up to 150m (500ft) when using 5xRG6 cables.
- Power Connect™ System Only one unit in a system, the transmitter or receiver needs to be connected to a power source.
- Compact DigiTOOLS® - 3 units can be rack mounted side-by-side in a 1U rack space with the optional RK-3T rack adapter.
-

TECHNICAL SPECIFICATIONS

INPUTS:	5 BNC connectors, IR on 3.5mm mini jack.
OUTPUT:	1 HDMI connector, IR on 3.5mm mini jack.
BANDWIDTH:	Supports up to 3.4Gbps bandwidth per graphic channel.
COMPLIANCE WITH HDMI STANDARD:	Supports HDMI 1.3 up to 10.2Gbps for all channels and HDCP.
POWER SOURCE:	12V DC, 330mA.
DIMENSIONS:	12.1cm x 7.2cm x 2.4cm (4.7" x 2.8" x 1.0") W, D, H.
WEIGHT:	0.3kg (0.7lbs) approx.
ACCESSORIES:	Power supply.