
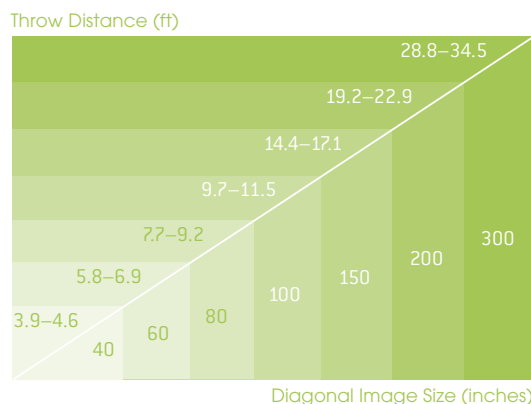
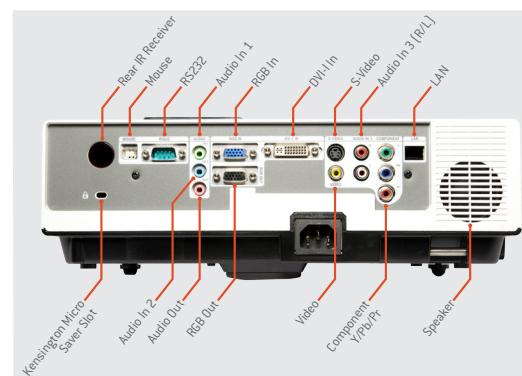


| | |
|-----------------------------|--|
| Model | SEATTLE X26N |
| Technology | .63" 3LCD  |
| Brightness | 2600 Lumen [Standard] 1700 [economy mode] |
| Native Resolution | 1024 x 768 [XGA] |
| Supported Resolution | up to 1600 x 1200 [UXGA] |
| Brightness Uniformity | 78%< |
| Projection Methods | Desktop front/rear, Ceiling front/rear |
| Colors | 16.7 million true color |
| Contrast Ratio | 500:1 |
| Aspect Ratio | Native 4:3; Compatible 16:9 |
| Image Size | 40"–300" |
| Projection Distance | 5' to 30' |
| Lens Shift | N/A |
| Throw Ratio | 1.45~1.73 [manual zoom and focus] |
| Zoom Ratio | 1.2:1 |
| Digital Zoom | 4x zoom with Pan function |
| Keystone Correction | Vertical +/- 30 degrees |
| Horizontal Scan Rate | 31 to 92 kHz |
| Vertical Scan Rate | 48 to 120 Hz |
| Audio Output | 1 x 8W mono |
| Lamp | 200W |
| Lamp Life | 3000/4000 [standard/economy] |
| Remote Control | Full Function IR remote with Laser Pointer |
| Noise Level | >33dB eco mode |
| Power Supply | Universal AC Input 100–240V at 50–60Hz |
| Power Consumption | 285W <2.6W standby mode |
| Safety Certifications | FCC-B, UL, cUL,TUB, CD, CE, CCC |
| Computer Compatibility | UXGA, SXGA+, SXGA, XGA, SVGA, VGA Resized; VESA Standards; PC and Macintosh Compatible |
| Video Compatibility | EDTV [480p], HDTV [576i/p, 720p, 1080i], NTSC/NTSC 4.43, PAL B/G/H/I/M/N 60, SECAM |
| Connectivity | VGA, DVI-I, Composite Video with 2 RCA [R/L] audio-in, Component Video, S-video, Audio 3.5mm-in x2, LAN, RS232, USB port for mouse control, VGA and 3.5 mm outputs |
| Service and Network Control | RS232, RJ45 |
| Weight | 7.3 lbs |
| Dimensions [W x H x D] | 12.8" x 10.24" x 3.8" |
| Operating Temperature | N/A |
| Security | Kensington® Lock Port, Keypad lock, Anchor security bar |
| Standard Accessories | AC power cord, VGA cable, USB cable, Remote Control with batteries, User manual [cd], Carrying Case |
| Optional Accessories | Replacement lamp, replacement remote, ALLINONE ceiling mount, USB-Booster, short throw lens attachment |



Key Features

Designed for tough environment
 Side changing lamp
 Side changing filter
 Quick off/on
 Advanced Anti-theft features, Kensington® lock, Keypad lock, Security Anchor bar
 Five auto features [Auto Search, Auto Sync, Auto Ceiling, Auto Keystone and Auto Filter Alert]
 Seven display modes [Natural, Cinema, Daylight, Green board, White Board, Black Board and User]
 Built-in 8W Mono Speaker
 Logo capture
 Image freeze function
 Digital zoom adjustment up to 4x
 Built in Network Control software via RJ45 [LAN] connection
 Multi Language OSD [On-Screen Display]
 Powerful 8W speaker



Outstanding Technical Support 24/7/365

And, of course, all **BOXLIGHT** products all come with free lifetime technical support. Speak with a hands-on, in-house, ISF Certified® technician ready to service your projector should the need arise.

© 2010 BOXLIGHT, Inc. Specifications subject to change without notice.
 Helps meet ADA Section 508 compliance
 BOXLIGHT NE 151 Highway 300, Suite A PO Box 2609 Belfair, WA 98528