

P7 WX32N



Standard Throw Interactive Projector


Power, Connect, Interact

Use the included LightPens to control your mouse and emulate touch features, using up to 5 pens at one time!

KEY FEATURES

- Standard throw wide screen (WXGA) projector
- Networkable
- Auto keystone
- Multiple display modes
- Variable iris
- Blank screen hot key
- Freeze function
- Closed captioning
- Multiple anti-theft features
- 10 second start up
- 60 second cool down
- Wired interactive projector

Diagonal Image Size (inches)

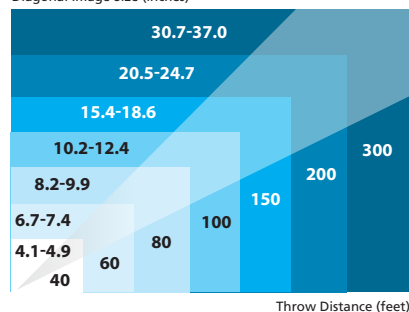

Model	P7 WX32N
Technology	.59" 3 x TFT LCD Panels
Brightness	3200 lumens (standard) / 2250 lumens (economy)
Native Resolution	WXGA (1280 x 800)
Supported Resolution	up to 1600 x 1200 (UXGA)
Brightness Uniformity	85%<
Projection Methods	Desktop front/rear, Ceiling front/rear
Optical Offset	9:1
Contrast Ratio	4000:1
Aspect Ratio	Native 16:10; Compatible 4:3
Image Size	40 in ~ 300 in
Projection Distance	Wide: 46 in ~ 352 in / 1.174 m ~ 8.943 m Tele: 55 in ~ 422 in / 1.413 m ~ 10.737 m
Throw Ratio	1.45 ~ 1.73:1 *allow 3-5% variance on all throw ratios
Speaker	1 x 7W
Zoom Ratio	1.2:1
Digital Zoom	1/4 ~ 16
Keystone Correction	Auto +/- 30 degrees
Horizontal Scan Rate	15 ~ 100 kHz
Vertical Scan Rate	48 ~ 85 Hz
Lens Type	Manual zoom / focus
Lamp	Ushio 230W
Lamp Life	4000 hr (standard) / 6000 hr (economy)
Remote Control	Multi-function remote with battery
Noise Level	36db@1m (standard) / 32db@1m (economy)
Power Supply	100 ~ 240V AC @ 50 ~ 60Hz
Power Consumption	280W (standard) <.5W in standby mode
Safety Certifications	CE, CCC, CB, CECp, cTUVus, CE, FCC
Computer Compatibility	UXGA, SXGA, XGA, SVGA, VGA PC and Macintosh compatible
Video Compatibility	PAL, SECAM, NTSC 4.43, PAL-M, PAL-N 480i/p, 576i/p, 720p, 1080i

Colors	1.07 billion
Inputs	S-video x 1, component x 1, video x 1 (share with component video), VGA x 2 (2nd VGA is optional in/out), 3.5mm audio x 1, RCA (L/R) x 2, HDMI x 1, mini-USB (for interactivity only)
Outputs	VGA x 1 (optional in/out), 3.5mm audio x 1
Service and Network Control	RS232, RJ45
Weight	6.4 lbs / 2.9 kg
Dimensions (W x H x D)	12.9 in x 9.5 in x 3.4 in / 327 mm x 241 mm x 87 mm
Operating Conditions	5°C ~ 35°C, Storage (-10°C ~ 60°C)
Security	Kensington® lock port, anti-theft bar, key pad lock
Standard Accessories	AC power cord, VGA cable, remote control with battery, user manual (CD), lens cover with string
Optional Accessories	Replacement lamp, replacement remote, Lamps for Life

Award Winning Technical Support 24/7/365

BOXLIGHT products come with free lifetime technical support. Speak with a hands-on, in-house, ISF Certified® technician ready to service your projector should the need arise.

www.boxlight.com
phone: 360-464-2119
text 'p7' to 51555

P7 WX32N

Standard Throw

Interactive Projector



Bargain priced enthusiasm.

Sometimes, all you need is basic, but Brilliant. These projectors produce sharp, bright images. They are built to work reliably in years of real classroom use. And for the exceptional performance and quality, you just can't beat price.



Present, Collaborate & Poll

Each P7 WX32N includes OKTOPUS interactive software. OKTOPUS is a collection of interactive teaching tools designed to enhance teaching and boost learning outcomes.

OKTOPUS is designed to work live over the top of digital content or web browser whether it is on a PC, MAC or interactive whiteboard.

Be Brilliant.

Basic, no compromise Brilliance.



You've never sounded so Brilliant.

SoundLite is presentation sound, done the BOXLIGHT way. Compact, easy to install, with a potent Class D amplifier. SoundLite 30W adds a high fidelity wireless microphone that automatically defers to the presenter's voice, over music, or other audio. Better sound, better understanding. Brilliant.



Brilliance, guaranteed.

Never worry about expensive bulb replacement again. Lamps For Life is a BOXLIGHT exclusive: a managed, one time fee, bulb replacement program. \$99.00 for education users, \$299.00 for corporate customers.* That's it, for as long as you own your BOXLIGHT.

* Some conditions apply.

24/7/365

US-based technical support