




Key Features

- It's an "interactive whiteboard" in a projector bag
- Use the mouse function to interact with any other interactive software, as well as web pages, the onscreen keyboard, and any mouse applications
- Write on the images or text with included colors and highlighting tools
- Save your drawings/images/edits to a image folder on your PC for later viewing
- Any flat surface becomes an interactive surface with the ProjectoWriteDX25NU. Interactive surface can be as large as you would like, as long as calibration points can be hit with interactive tools
- Image freeze function
- Multi Language OSD (On-Screen Display)
- Set up and interact in less than 5 minutes
- Small software package
- Built in Network Control software via RJ45 (LAN) connection
- Top changing lamp for easy access when ceiling mounted
- Ships with both a LightPenII and wand for interaction with the image
- Ultra Short throw lens allows for 60" image from 30" away from screen
- Bright, Eco, and Normal lamp modes
- Green Power Saving Mode
- Filter Free
- Portable

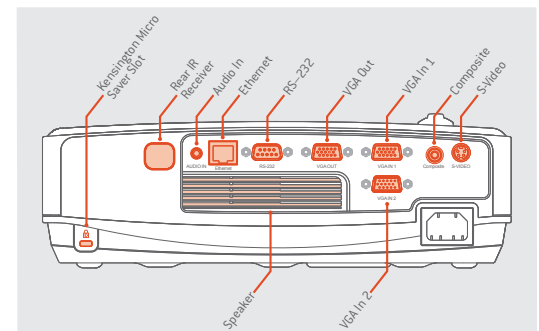

Throw Distance (ft)



Diagonal Image Size (inches)

Model	ProjectoWriteDX25NU
Technology	0.55" DMD DLP 
Brightness	2500 Lumen
Native Resolution	1024 x 768 (XGA)
Pixels/Scan Lines	786,432 Pixels/768 Lines
Supported Resolution	Compressed Max 1280x800 (WXGA)
Brightness Uniformity	78%<
Projection Methods	Front, Ceiling and Rear
Projection Distance	1.2'-12'
Contrast Ratio	1600:1 (Full Field)
Color Depth	8 Bit/1.67 Billion Colors
Aspect Ratio	Native 4:3; Compatible 16:9
Image Size	40"-300"
H-Sync Range	15-82kHz
V-Sync Range	50-85Hz
Throw Ratio	0.62:1
Lamp	230W/180W (standard/economy)
Lamp Life	2000/3000 (standard/economy)
Noise Level	ECO mode 34dB
Power Supply	100 240V/AC (Full Range)
Power Consumption	260W normal mode
Power Standby	Under 1W
Computer Compatability	VGA, SVGA, XGA, SXGA, WXGA
Video Compatability	NTSC/PAL/SECAM, 480i, 480p, 720p, 1080i
Input Terminals	RGB:D-Sub 15 pin x 2, Video: RCA x 1,S-Video; Audio: Mini Jack x 1, RS232 x 1
Output Terminals	RGB: D-Sub 15 pin x 1
Speaker	Mono 2W x 1
System Requirement	USB 2.0
OS Required	Microsoft Windows XP (SP2)/Vista/Windows7, Macintosh
Processor Type	Intel Core Duo or Above
RAM size	512 MB or Above
Min. HDD Space	30 MB
Lens Options	N/A
Standard Lens	Fixed Zoom and Manual Focus, F=2.6
Lens Offset	104% 109%
Packing Information	
Dimensions (W x H x D)	11.2 x 3.7 x 9.7 inches, 284 x 94 x 237 mm
Net Weight	6.9 lbs, 3.1 kg
Included Standard Accessories	Computer Cable, Power Cable, USB Cable, Remote Control, Light Pen with AAA Batteries, Pointer with AA Batteries, CD Wizard (User manual, Interactive software-LightPenII)
Optional Accessories	USB extender
Regulations	FCC, CE, UL and CB

Outstanding Technical Support 24/7/365

And, of course, all **BOXLIGHT** products all come with free lifetime technical support. Speak with a hands-on, in-house, ISF Certified® technician ready to service your projector should the need arise.

© 2010 BOXLIGHT, Inc. Specifications subject to change without notice.
Helps meet ADA Section 508 compliance
BOXLIGHT NE 151 Highway 300, Suite A PO Box 2609 Belfair, WA 98528