Seattle WX25N

The Wide-Eyed Wonder

The Seattle WX25N is a one-of-a kind widescreen LCD projector. With 2500 ANSI lumens of brightness, generous input panel, and easy installation features - this unit is a popular bundle with a digital whiteboard.







Seattle WX25N

Specifications



BRIGHTNESS

2500 Lumens (Standard) 1650 Lumens (Economy)

RESOLUTION

1280x800 WXGA (Native) 1600x1200 UXGA (Compatible)

DISPLAY TYPE

0.59" LCD x 3

CONTRAST RATIO

500:1

ASPECT RATIO

16:10 Native 4:3 Compatible

THROW RATIO

1.54 ~ 1.85 (x screen width)

PROJECTION LENS

Manual Zoom & Focus

ZOOM RATIO

1.2:1

DIAGONAL IMAGE SIZE

40" - 300" 101.6cm - 762cm

THROW DISTANCE

3.33' - 25' 1.01m - 7.62m

KEYSTONE

+/- 30° Vertical

LAMP

230 watt UHP

LAMP LIFE

2000 (Standard) 3000 (Economy)

INPUTS

VGA DVI-I Composite S-Video

Component RCA Audio (R/L) Audio (3.5mm) x 2

OUTPUTS

VGA

Audio (3.5mm)

PROJECTOR CONTROLS

USB

RS232 (9-pin)

RJ45 LAN Connection

COMPATIBILITY

VGA, SVGA, XGA, SXGA, UXGA,

EDTV / SDTV / HDTV

480i/p, 576i/p, 720p, 1080i

FCC CERTIFICATION

FCC-B, UL, cUL, TUV, CD, CE, CCC

VIDEO COMPATIBILITY

NTSC, NTSC 4.43, PAL M/N/60, SECAM

AUDIO

1 x 8w Mono Speaker

DECIBEL RATING

33 dB (Standard) / 30 dB (Economy)

H-REFRESH RATE

31-92 kHz

V-REFRESH RATE

48-120 Hz

POWER SUPPLY

AC 110 ~ 240 Volts 50-60Hz (Auto ranging)

POWER CONSUMPTION

312 Watts <5w standby

DIMENSIONS (WxDxH)

12.8" x 10.24" x 3.8" 32.5cm x 26cm x 9.7cm

WEIGHT

7.3 lbs 3.3 kg

WARRANTY

3 year parts & labor / 90 day lamp

Special features of the Seattle WX25N include:

Widescreen Model— Replicate exactly what you see on your widescreen laptop or desktop computer. 16:10 aspect ratio.


LAN Connectivity— For network installation. Manage your projectors through a web-based platform.


Quick Start Up and Shut Down—

Set up and present quickly, and only a 10 second cool down cycle when you finish.

Side Changing Lamp and Filter-

Easy lamp installation and projector maintenance. No need to remove the projector from ceiling mount position.



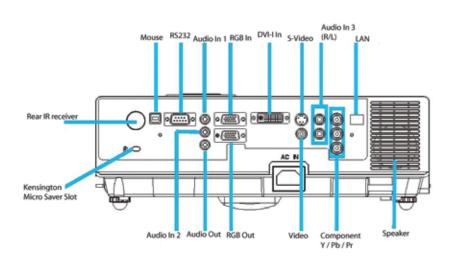



www.boxlight.com 360.464.2119