


LCD Lift

Bomb bay doors and a slim cross-section distinguish the LCD LIFT. Most popular projectors fit easily inside this unit, which is available in two sizes—MODEL A and MODEL B. Bomb bay style closure doors are standard, but flat ceiling closure panel is also available.

Aluminum plenum housing comes standard as well. Contains internal switched duplex receptacle, 115V AC, which is powered when the unit is fully down. The LCD LIFT contains an innovative current sensor that delays closing of the unit until the projector lamp has shut off. Lifting capacity 65 lbs.

System Options

- **Ceiling Closure Panel**—Universal steel ceiling closure in a white finish or recessed to accept ceiling tile.
- **Ceiling Access Door**—A 2' x 2' hinged door to access lift above a finished ceiling for maintenance or repairs without having to damage the ceiling. Available with a white painted finish or recessed to accept ceiling tile.
- **Low Profile Mount**—For projectors weighing less than 26 pounds. Details on page 5.
- **Factory Installed Cables**—for Video and Projector Control.
- **Controls**—Includes 1 wall switch. Visit website for other control options at www.draperinc.com/go/LCDLift.htm.

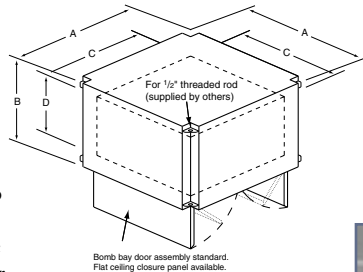

	Model A	Model B
A	24"	29"
B*	17 ³ / ₄ "	22 ³ / ₄ "
C	18"	23"
D	11"	16"

* Flat Ceiling closure panel adds ³/₄" to dimension B.



LCD Lift Model A with standard bomb bay closure located at Manitowoc Beverage Equipment, Sellersburg, IN. Installation by ISSG and photography © Kenneth Hayden, both of Louisville, KY.

AeroLifts

Three models to lift up to 25, 50 or 150 lbs. With a simplified design, AEROLIFTS install in even the tightest spots. They offer a different look than the mechanical one of scissor lifts.

All three models are powered by strong tubular motors for a simplified design, and feature a stabilizing arm which can be used for cable management. Built-in adjustability allows you to deal with job site conditions quickly and easily, like slightly out of square or irregularly spaced joists. Projector can be mounted flush to bottom pan, or with Low PROFILE MOUNT. UNIVERSAL BRACKET enables instant registration of projected image.

Note: The AEROLIFT 25, 50 and 150 can also be used to recess speakers, security cameras, videoconferencing cameras or document cameras.

Dimensions & Data ¹	AeroLift 25 w/Small Plenum and Closure	AeroLift 25 w/Large Plenum and Closure	AeroLift 50	AeroLift 150 ¹
Height of lift in closed position ²	4"	4"	6 ¹ / ₄ "	6 ¹ / ₄ "
Max. Overall lift dims (W x L)	22 ¹ / ₄ " x 14"	22 ¹ / ₄ " x 14"	28 ³ / ₄ " x 15"	31 ¹ / ₄ " x 15 ⁷ / ₈ "
Ceiling opening (with closure W x L)	14 ¹ / ₁₆ " x 23 ³ / ₈ "	24" x 24"	29 ¹ / ₂ " x 29 ¹ / ₂ "	29" x 39 ¹ / ₂ "
Optional plenum housing (W x L)	14 ⁹ / ₁₆ " x 23 ⁷ / ₈ "	25" x 25"	30 ¹ / ₂ " x 29 ³ / ₈ "	31 ³ / ₄ " x 39 ³ / ₈ "
Max. projector size (W x L) ⁴	8 ³ / ₄ " x 18"	20" x 20"	18 ³ / ₄ " x 25 ¹ / ₂ "	24 ³ / ₄ " x 35"
Max. down travel	20"	20"	32"	32"
Approx. travel time to lowest position	14 sec.	14 sec.	23 sec.	23 sec.
Total Capacity (lbs.) ⁵	25	25	50	150
Net weight of lift (lbs.) ⁶	20	20	28	32
Amperes	1.2	1.2	1.2	1.2

¹ Additional AEROLIFT specifics at: www.draperinc.com/go/AeroProjectorlifts.htm.

System Options

- **Ceiling Closure Panel**—Universal steel ceiling closure in a white baked enamel finish or recessed to accept ceiling tile.
- **Plenum Housing**—Height varies according to choice of projector. Includes ceiling trim ring. Does not include ceiling closure panel.
- **Ceiling Finish Kit**—Ceiling closure panel and ceiling trim ring to finish ceiling opening.
- **Control Options**—Operated by one 115V rocker switch. For more options, visit our website.

