

DRAPER

www.draperinc.com
draper@draperinc.com

411 South Pearl St.
Spiceland, Indiana
U.S.A. 47385-0425
Tel. 765/987-7999
Fax 765/987-7142

KS-3 3-Position Key Switch

Technical Data Sheet

USES: The KS-3 replaces the standard single-station control switch for all products (screens, shades or projector lifts) where the directional functions (Up and Down) need to be combined with the security of a key switch.


COMPATIBILITY: KS-1 Power Supply Key Switch.
The KS-3 is intended as the sole control station, and cannot be used as a multiple station control. It can, however, be used with the KS-1 power supply key switch, although having two key switches is redundant. It is not intended for use with any other control.

CONTACTS: Two cam-operated Single-Pole, Single-Throw contact blocks (On-Off), wired to emulate Single-Pole, Double-Throw, Center Off (On-Off-On). Maintained action.

RATING: 600 Volts, UL recognized, CSA recognized.

DESCRIPTION: 3-position key operator.
Cover plate is stainless steel.
Four 6" wire leads: black, black, red and blue (2 commons, down and up).
2-3/4" x 4-1/2" cover plate fits a single-gang box.

ILLUSTRATION:

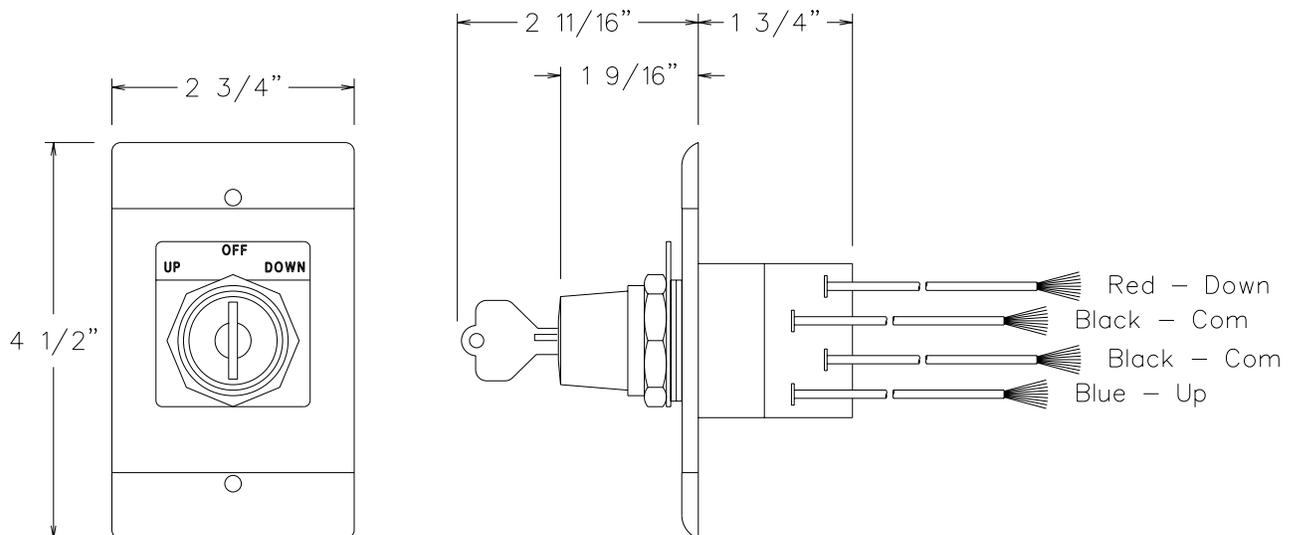

ISSUED: 5-12-98