

# 8100

## ImagePro 8100 Ultra Short Throw LCD Projector




**CEILING MOUNT**

*The ImagePro 8100 features a short throw distance to allow placement where user shadow does not affect image viewing*

### FEATURES

- 2500 Lumens Brightness
- XGA Resolution
- Large filter with side access
- Ultra short 4 to 31 inch throw
- Monitor Loopthrough
- Built-in Anti-theft security
- Dynamic room-filling sound from 7-watt speaker
- No shadow/No glare

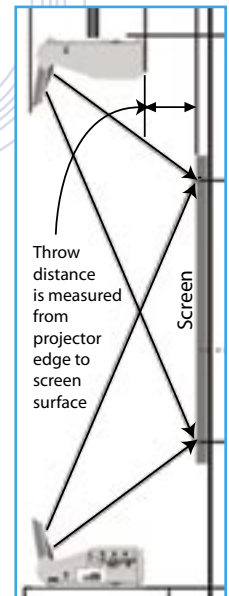

**FLOOR MOUNT**

THE ALL NEW

# DUKANE

**Education. Presentation. Inspiration.**

[www.dukcorp.com](http://www.dukcorp.com)




ConVA by Dukane delivers control of classroom audio visual assets in sync with our Student Response System. Experience tomorrow's classroom today with ConVA. Visit [www.convashsystems.com](http://www.convashsystems.com).

**Call Dukane: 800-676-2485**

# IMAGEPRO 8100 ULTRA SHORT THROW LCD PROJECTOR

## Back Panel

## Connections

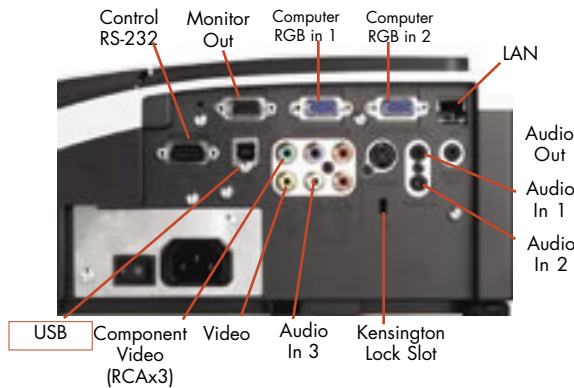

## FEATURES

- Ultra Short (4 to 31 inch) throw distance
- XGA (1024 x 768) resolution
- 2500 ANSI lumens of brightness
- Large filter with side access
- Monitor Loophrough
- Built-In Anti-theft security
- Room-filling sound from 7W speaker
- Ceiling or floor mount
- No shadow /No glare



DIAGONAL	WIDTH	THROW DISTANCE	VERTICAL OFFSET
INCHES	INCHES	INCHES	INCHES
60	48	4	11
70	8	7	13
80	64	10	14
90	72	13	15.5
100	80	16	17
120	96	22	20
150	120	31	24

# DUKANE

Dukane Corporation  
Audio Visual Products Division  
2900 Dukane Drive  
St. Charles, Illinois 60174  
800-676-2485  
630-584-5156  
avsales@dukcorp.com  
www.dukcorp.com/av

ImagePro is a registered trademark of Dukane Corporation  
#11700-L-06



toll-free  
fax  
e-mail

## Specifications 8100

Image Element 0.63" polysilicon active-matrix TFT x3  
 Brightness 2500 ANSI lumens  
 (2000 lumens in Whisper Mode)  
 Resolution 1024 x 768 pixels (H X V), XGA  
 Contrast 500:1  
 Scanning Frequency fh 15 -106 kHz, fv 50-120 Hz  
 Lens Fixed  
 Lens Throw Ratio SEE TABLE THIS PAGE  
 Keystone Correction Digital, vertical +/-5 deg  
 Aspect Ratio 4:3, 16:9 selectable  
 Computer Compatibility SVGA, VGA, XGA, SXGA, UXGA  
 Video Compatibility MAC13" and MAC16"  
 NTSC, NTSC4.43, PAL, SECAM,  
 PAL-M, PAL-N,  
 HDTV (1080i, 720p, 576i, 480i/p)  
 Component Video, Image Control Freeze function, electronic  
 magnification and pan  
 Mouse Control Using USB  
 Projection Modes Front/rear/ceiling  
 Color Reproduction 24 bit (16.7 million)  
 Lamp 220W UHB  
 Lamp Life 2000 hours (typical) 3000 hours  
 (whisper mode)  
 Audio 1 speaker 7 watt  
 Throw Distance 4" to 31"  
 Screen Size, diagonal 60" to 150"  
 Inputs, Video (1) Component, RCA x 3  
 (1) S-video, Mini DIN 4-pin  
 (1) Composite video, RCA x 1  
 Inputs, Computer (2) RGB, 15 pin D-sub  
 Inputs, Audio (2) Stereo mini jack: for PC/Access.  
 (1) RCA x 2 (for video)  
 Outputs, Audio (1) Stereo mini jack, adjustable  
 Ethernet RJ-45 Port/100 Base-T  
 Outputs, Monitor RGB, 15 pin D-sub  
 Outputs, Control RS-232, 9 pin D-sub  
 USB (Mouse control)  
 Security Kensington lock slot & Security Bar  
 Fan Level 39dB, ultra quiet; 34dB Whisper Mode  
 Operating Temperature 41-95 deg F  
 Power AC 100-120V, AC 220-240V  
 50/60 Hz, 320 watt  
 Size (WxHxD) 15.6" x 5.2" x 14.0"  
 Weight 12.8 lbs.  
 CARTON (WxHxD) 22" X 9.5" X 19"  
 Shipping Weight 24 lbs.  
 Accessories Included Remote control, batteries, power cord,  
 RGB cable, RCA video cable and  
 operators manual.  
 Safety UL/C-UL, FCC Class B  
 Optional Accessories Lamp 456-8100  
 Ceiling Mount, Universal; RPM-U  
 Filter; QD60122

Five (5) year limited warranty on parts and labor in North America,  
 lamp excluded (for other locations, local warranties apply). Includes  
 Dukane's FREE 1 year *Peace-of-Mind Loaner Program.*

# 5YR