

8103H

ImagePro 8103H Ultra Short Throw LCD Projector




CEILING MOUNT

The ImagePro 8103H features a short throw distance to allow placement where user shadow does not affect image viewing

FEATURES

- 3000 Lumens Brightness
- XGA Resolution
- Large hybrid filter with side access
- Ultra short 4 to 31 inch throw
- Monitor Loopthrough
- Built-in Anti-theft security
- Dynamic room-filling sound from 7-watt speaker
- No shadow/No glare/Perfect fit
- Hybrid 2000 hour filter

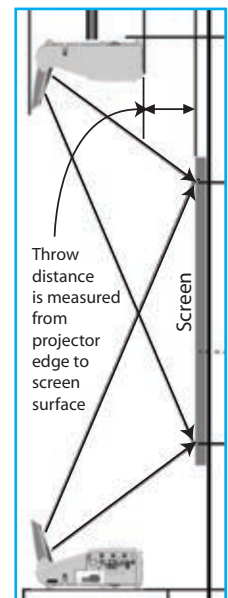

FLOOR MOUNT

THE ALL NEW
DUKANE
Education. Presentation. Inspiration.




Convey by Dukane delivers control of classroom audio visual assets in sync with our Convey AClick Student Response System. Experience tomorrow's classroom today with Convey. Visit www.conveyclassrooms.com.

Toll-free: 866-280-4298 • Web: www.dukane.com/av
Fax: 630-584-5156 • E-mail: avsales@dukane.com

Call Dukane: 866.280.4298

IMAGEPRO 8103H ULTRA SHORT THROW LCD PROJECTOR

Back Panel Connections

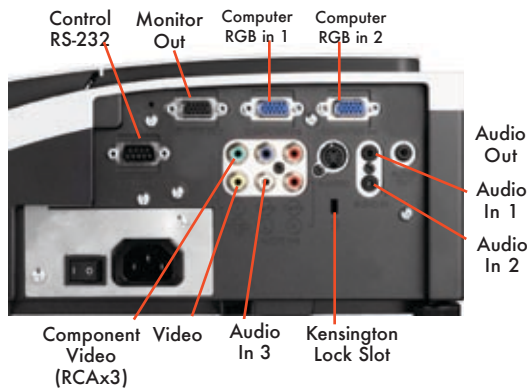


Specifications

8103H

Image Element	0.63" polysilicon active-matrix TFT x3
Brightness	3000 ANSI lumens (2000 lumens in Whisper Mode)
Resolution	1024 x 768 pixels (H X V), XGA
Contrast	500:1
Scanning Frequency	fh 15 -106 kHz, fv 50-120 Hz
Lens	Fixed
Lens Throw Ratio	SEE TABLE THIS PAGE
Keystone Correction	Digital, vertical +/- deg
Aspect Ratio	4:3, 16:9 selectable
Computer Compatibility	SVGA, VGA, XGA, SXGA, UXGA MAC13" and MAC16"
Video Compatibility	NTSC, NTSC4.43, PAL, SECAM, PAL-M, PAL-N, HDTV (1080i/p, 720p, 576i, 480i/p)
Image Control	Freeze function, electronic magnification and pan
Closed Caption	CC1, CC2, CC3, CC4, TI, T2, T3, T4
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	230W UHB
Lamp Life	2000 hours (typical) 3000 hours (whisper mode)
Audio	1 speaker 7 watt
Throw Distance	4" to 31"
Screen Size, diagonal	60" to 150"
Inputs, Video	(1) Component, RCA x 3 (1) S-video, Mini DIN 4-pin (1) Composite video, RCA x 1
Inputs, Computer	(2) RGB, 15 pin D-sub
Inputs, Audio	(2) Stereo mini jack: for PC/Access. (1) RCA x 2 (for video)
Outputs, Audio	(1) Stereo mini jack, adjustable
Outputs, Monitor	RGB, 15 pin D-sub
Outputs, Control	RS-232, 9 pin D-sub
Security	Kensington lock slot & Security Bar
Fan Level	33dB, ultra quiet; 28dB Whisper Mode
Operating Temperature	41-95 deg F
Power	AC 100-120V, AC 220-240V 50/60 Hz, 340 watt
Size (WxHxD)	15.6" x 5.2" x 14.0"
Weight	12.8 lbs.
CARTON (WxHxD)	22" X 9.5" X 19"
Shipping Weight	24 lbs.
Accessories Included	Remote control, batteries, power cord, RGB cable, RCA video cable and operators manual, cable cover.
Safety	UL/C-UL, FCC Class B
Optional Accessories	Lamp 456-8101H Wall Mount; 8100WALLARM2 Ceiling Mount, Universal; RPM-U Filter; UX35381

FEATURES

- Ultra Short (4 to 31 inch) throw distance
- XGA (1024 x 768) resolution
- 3000 ANSI lumens of brightness
- Large hybrid filter, 2000 hours
- Monitor Loopthrough
- Built-In Anti-theft security
- Room-filling sound from 7W speaker
- Ceiling or floor mount
- No shadow /No glare
- Perfect fit for easy setup
- Audio pass-through in standby mode

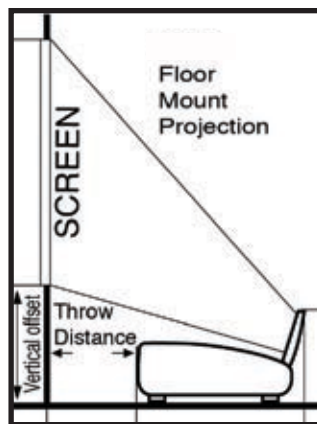

DIAGONAL	WIDTH	THROW DISTANCE	VERTICAL OFFSET
INCHES	INCHES	INCHES	INCHES
60	48	4	11
70	56	7	13
80	64	10	14
90	72	13	15.5
100	80	16	17
120	96	22	20
150	120	31	24

THE ALL NEW
DUKANE
Education. Presentation. Inspiration.

Audio Visual Products
2900 Dukane Drive
St. Charles, Illinois 60174
Toll-free: 866.280.4298
Fax: 630-584-5156
E-mail: avsales@dukane.com
Web: www.dukane.com/av



ImagePro is a registered trademark of Dukane Corporation
#10-10005.00

Five (5) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 1 year Peace-of-Mind Loaner Program.

5YR