

8110H

ImagePro 8110H Portable Short Throw LCD



The ImagePro 8110H is a light (7.7lbs), easy-to-install Short Throw LCD projector ideal for classroom or conference room.

8110H FEATURES

- 2000 Lumens Brightness
- XGA Resolution
- Lamp access on top
- High performance (4000 HR) hybrid filter with easy side access
- Short throw Ratio of 0.6
- Instant on ON and OFF
- New 3000/4000 hour lamp
- Built-in Anti-theft security
- Audio "passthrough" permits use of sound system to play CDs when projector is off



Dynamic Short Throw Lens enables projector to be positioned close to screen or white board

THE ALL NEW
DUKANE
Education. Presentation. Inspiration.



Convey by Dukane delivers control of classroom audio visual assets in sync with our Convey AClick Student Response System. Experience tomorrow's classroom today with Convey. Visit www.conveyclassrooms.com.

Toll-free: 866-280-4298 • Web: www.dukane.com/av
Fax: 630-584-5156 • E-mail: avsales@dukane.com


Call Dukane: 866.280.4298

ImagePro 8110H

Short Throw LCD projector

Back Panel

Connections

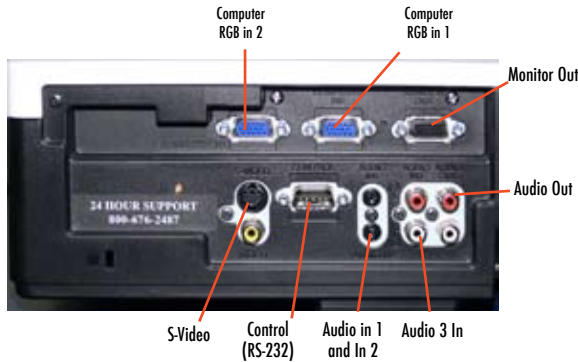

Key features:

- XGA (1024 x 768) resolution
- Short throw for small rooms and IW Boards
- 2000 ANSI lumens of brightness
- Whiteboard & Blackboard Modes
- Easy maintenance with lamp access on top, 4000 hour filter with sideaccess
- Monitor loopthrough & remote mouse control
- Instant On and Off
- Built-In Anti-theft security
- Audio passthrough for sound when projector is off
- 3000/4000 hour lamp life
- Lock slot, security bar and transition detector
- Five Year Warranty and One Year Peace of Mind Service

8110H Projection Table

Image Size 4:3		Throw Distance	
Diagonal	Width	Min.	
Inches	Inches	Inches	
60	48	27	
70	56	32	
80	64	36	
90	72	41	
100	80	46	

Throw Ratio (Distance to Width) Fixed at 0.6

Tolerance is 8% on throw distance.

THE ALL NEW
DUKANE

Education. Presentation. Inspiration.

Audio Visual Products
2900 Dukane Drive
St. Charles, Illinois 60174
Toll-free: 866.280.4298
Fax: 630-584-5156
E-mail: avsales@dukane.com
Web: www.dukane.com/av



#09116

ImagePro is a registered trademark of Dukane Corporation

Specifications

Image Element	0.55" polysilicon active-matrix TFT x3
Brightness	2000 ANSI lumens (1600 lumens in Whisper Mode)
Resolution	1024 x 768 pixels (H X V), XGA
Contrast	400:1
Scanning Frequency	fh 15 -106 kHz, fv 50-120 Hz
Lens	Fixed, Digital Zoom x 1.3
Lens Throw Ratio	0.6 : 1 throw distance to image width
Keystone Correction	Digital, vertical +/-35 deg
Aspect Ratio	4:3, 16:9 selectable
Computer Compatibility	SVGA, VGA, XGA, SXGA, UXGA MAC13" and MAC16"
Video Compatibility	NTSC, NTSC4.43, PAL, SECAM, PAL-M, PAL-N, Component Video, HDTV (1080i/p, 720p, 576i, 480i/p)
Image Control	Freeze function, electronic magnification and pan
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	180W UHB
Lamp Life	3000 hours (typical) 4000 hours (whisper mode)
Audio Output	1 Speaker, 1W
Throw Distance	27" to 46"
Screen Size, diagonal	60" to 100"
Inputs, Video	(1) S-video, Mini DIN 4-pin (1) Composite video, RCA x 1
Inputs, Computer	(2) RGB, 15 pin D-sub
Inputs, Audio	(2) Stereo mini jack: for PC/Accessories (1) RCA x 2 (for video)
Outputs, Audio	(1) RCA x 2, adjustable L&R
Outputs, Monitor	RGB, 15 pin D-sub
Control	RS-232, 9 pin D-sub
Security	Kensington lock slot & Security Bar
Fan Level	37dB, ultra quiet; 29dB Whisper Mode
Closed Caption	CC1, CC2, CC3, CC4, T1,T2,T3,T4
Operating Temperature	41-95 deg F
Power	AC 100-120V, AC 220-240V 50/60 Hz, 250 watt
Size (WxHxD)	13.1" x 4.1" x 12"
Weight	7.7 lbs.
Shipping Weight	14 lbs.
Carton Size	15" x 17" x 18"
Accessories Included	Remote control, batteries, power cord, RGB cables, operators manual
Safety	UL/C-UL, FCC Class B
Optional Accessories	Lamp 456-8110H Ceiling Mount, Universal; RPM-U Filter; UX35971 Cable Cover CCAW100

Five (5) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 1 year Peace-of-Mind Loaner Program.

5YR