




## ImagePro 8780 DLP Projector

- 2500 lumen brightness
- XGA resolution
- 1800:1 contrast ratio
- 3 Watt speaker
- Brilliant color images
- Vertical Keystone Correction
- Control remotely
- Only 7.8 lbs.
- Very low maintenance

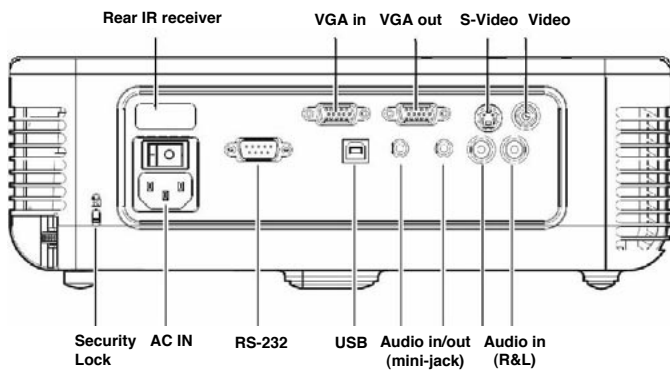


# 8780 DUKANE

# ImagePro 8780 LCD projector

The ImagePro 8780 is a DLP projector that can be used in a variety of applications. With a brightness of 2500 lumens the 8780 is great in classrooms and conference rooms. The 8780 is designed to be reliable and extremely easy to maintain since it has no filters to service.

This DLP projector has outstanding video and computer images with the new 6 segment brilliant color wheel. It has full XGA resolution (1024 x 768) and can be easily transported or mounted near the ceiling.



## Key features:

- XGA (1024 x 768) resolution
- 2500 ANSI lumens of brightness
- 1800:1 contrast ratio
- 3 Watt speaker
- Brilliant color images
- Vertical Keystone Correction
- Only 7.8lbs
- No filter to service
- Easy lamp replacement through top cover
- Controllable remotely
- Three Year Warranty and One Year Peace of Mind Service

8780 Projection Table

Image Size 4:3		Throw Distance	
Diagonal	Width	Min.	Max.
Inches	Inches	Feet	Feet
40	32	5.0	5.9
60	48	7.6	8.8
100	80	12.6	14.7
150	120	18.9	22.0
200	160	25.2	29.3

Throw Ratio (distance to width), 1.89 2.18



# DUKANE

Dukane Corporation  
Audio Visual Products Division  
2900 Dukane Drive  
St. Charles, Illinois 60174  
Toll-free: 800-676-2485  
Fax: 630-584-5156  
avsales@dukcorp.com  
www.dukcorp.com/av

#080011 ImagePro is a registered trademark of Dukane Corporation

## Specifications

Image Element	0.55" DND DLP
Brightness	2500 ANSI lumens 2000 (whisper mode)
Resolution	1024 x 768 pixels (H X V), XGA
Contrast	1800:1
Scanning Frequency	fh 15, 31-90 kHz, fv 50-85 Hz
Lens	Manual zoom, and Focus
Lens Throw Ratio	1.89 - 2.18 :1 throw distance to image width
Keystone Correction	Digital vertical +/-15 deg.
Aspect Ratio	4:3 native, 16:9 selectable
Computer Compatibility	VGA, SVGA, XGA, SXGA,
Video Compatibility	NTSC, NTSC 4.43, PAL B/G/H/I/M/N 60 SECAM, HDTV 1080i, 720p, 480/p
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	230W
Lamp Life	2000 hours (4000 hours Whisper)
Audio	3W x 1
Throw Distance	40" to 330"
Screen Size, diagonal	23" to 260"
Inputs, Video	(1) S-video, Min DIN 4-pin, (1) Composite video, RCA x 1 (1) Audio, Stereo RCA x 2 (L&R) (1) RGB Signal: D-sub, 15 pin (1) Audio, Stereo mini jack
Inputs, Computer	(1) 15 pin, D-sub (1) Audio, Stereo mini jack 9 pin D-sub Connector, RS232 USB Type A
Outputs Monitor	Kensington slot & password select
Outputs Audio	34dB, (31dB in whisper mode)
Outputs, Other	41 to 95 deg. F (5-35 deg C) AC 110-240V (auto ranging) 50/60 Hz, 290W (<10W Standby)
Security	Power
Fan Level	Size (WxHxD)
Operating Temperature	11.8" x 9.6" x 3.5"
Power	Weight
Size (WxHxD)	7.8 lbs. (3.5 kg)
Weight	Carton Size
Carton Size	17" x 15" x 8"
Shipping Weight	12 lbs.
Accessories Included	Remote control, batteries (AA), power cord, Computer Cable, CD-ROM, User Manual
Safety	FCC-B, UL/CUL, TUV, CB, CE, CCC
Optional Accessories	Lamp 456-8780 Ceiling mount , universal; RPA-U

Specifications subject to change without notice.

Three (3) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 1 year Peace-of-Mind Loaner Program.

# 3YR