

# 8953H

## ImagePro 8953H Portable LCD Projector



*The ImagePro 8953H is a bright (5000 lumens) and versatile portable LCD projector with network control, and is HDTV ready*

### 8953H FEATURES

- 5000 lumen brightness
- XGA resolution
- Network wireless capability for control, maintenance and security
- Lamp access on top
- Horizontal & vertical lens shift
- Optional bayonet style lenses available
- 4 Built-in 4W speakers with SRS WOW™ technology
- HDTV ready, HDMI input
- Side mounted high-performance hybrid filter (2000 hrs)



**Manual Horizontal and Vertical Lens Shift for Perfect Image Alignment**

THE ALL NEW  
**DUKANE**  
**Education. Presentation. Inspiration.**

[www.dukcorp.com](http://www.dukcorp.com)



Convey by Dukane delivers control of classroom audio visual assets in sync with our Student Response System. Experience tomorrow's classroom today with Convey. Visit [www.conveyclassrooms.com](http://www.conveyclassrooms.com).


**Call Dukane: 800-676-2485**

# ImagePro 8953H

## Portable LCD projector

Back Panel

Connections

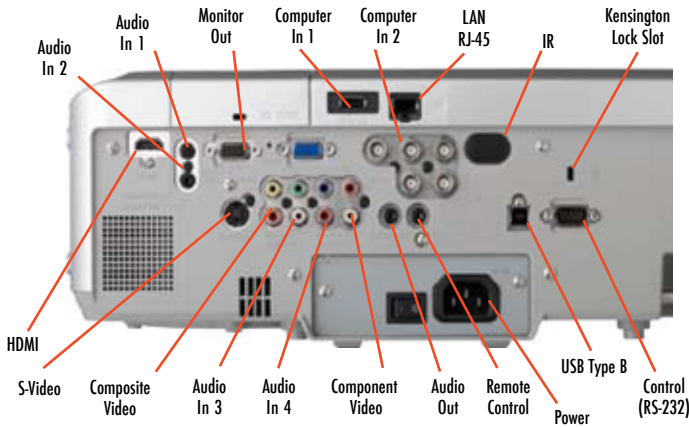

### FEATURES

- XGA (1024 x 768) resolution
- 5000 ANSI lumens of brightness
- Network Capability, RJ-45, connection and wireless
- Whiteboard & Blackboard Modes
- Easy maintenance in ceiling mount with lamp access on top & filter access on side (2000 hour filter)
- Monitor loopthrough & remote mouse control
- Remote control with "My Buttons"
- Optional bayonet style lenses available
- 4 Built-in 4W speakers with SRS WOW™ technology
- Input source naming
- Horizontal & vertical lens shift
- HDTV ready & progressive scan, HDMI input
- Kensington lock slot & security bar
- Five Year Warranty and One Year Peace of Mind Service

### 8953H Projection Table

Image Size 4:3		Throw Distance	
Diagonal	Width	Min.	Max.
Inches	Inches	Feet	Feet
30	24	2.9	3.5
60	48	5.9	7.2
80	64	8.0	9.6
100	80	10.0	12.0
120	96	12.0	14.5
150	120	15.0	18.0
200	160	20.1	24.2
300	240	30.2	36.4

Throw Ratio (distance to width) 1.5 to 1.8

# DUKANE

Dukane Corporation  
 Audio Visual Products Division  
 2900 Dukane Drive  
 St. Charles, Illinois 60174  
 800-676-2485  
 630-584-5156  
 avsales@dukcorp.com  
 www.dukcorp.com/av

toll-free  
 fax  
 e-mail



### Specifications

Image Element	0.8" polysilicon TFT x3
Brightness	5000 ANSI lumens, 2300 (whisper mode)
Resolution	1024 x 768 pixels (H X V), XGA
Contrast	1000:1 (using active iris)
Scanning Frequency	fh 15-106 kHz, fv 50-120 Hz
Lens	Manual zoom (F=1.7 to 1.9), 1.2X. Horizontal & vertical lens shift
Lens Throw Ratio	1.5-1.8 :1 throw distance to image width
Keystone Correction	Digital vertical & horizontal +/-40 deg.& +/- 20 deg.
Aspect Ratio	4:3 native, 16:9 selectable
Computer Compatibility	VGA, SVGA, XGA, SXGA, SXGA+ and UXGA Compressed, MAC13", MAC16"
Video Compatibility	NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, SECAM, HDTV 1080i, 720p, 576i, 1080i/p
Image Control	Freeze function, electronic magnification and pan
Mouse Control	Using USB
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	275W UHB
Lamp Life	2000 hours (3000 hours Whisper Mode)
Audio	4W x 4
Throw Distance	35" to 436"
Screen Size, diagonal	30" to 300"
Inputs, Video	(1) Component, RCA x 3 (1) S-video, Min DIN 4-pin, (1) Composite video, RCA x 1 (2) Audio, Stereo, RCA x 2, (L/R)
Inputs, Computer	(1) RGB Signal: D-sub, 15 pin (1) HDMI (2) Audio, Stereo mini jack
RGB Analog In	(1) BNC X 5 (BNC X 3 component)
Outputs Monitor	15 pin, D-sub
Outputs Audio	Audio, Stereo mini jack
Control	9 pin D-sub Connector, RS232 USB type B (remote mouse only)
Network	RJ-45 port / 100Base-T
Security	Kensington slot, Security bar
Wireless (optional)	802.11 b/g with SD cord
Fan Level	35dB, (28dB in whisper mode)
Operating Temperature	41 to 95 deg. F (5-35 deg C)
Power	AC 100-120V, AC220-240V 50/60 Hz, 460 watt
Size (WxHxD)	16.5" x 5.5" x 12.6"
Weight	15.6 lbs.
Carton Size	21" x 14" x 19"
Shipping Weight	25 lbs.
Accessories Included	Remote control, batteries (AA), power cord, RGB cable, security label, operator/safety manual.
Safety	UL60950, C-UL, FCC Part15, Class B, CE, EN60950
Optional Accessories	Lamp 456-8949H, Ceiling mount, universal; RPA-U, wireless card, WL SD Card VA08331, Filter MU05661
Optional Lenses	FL601 Short fixed, throw Ratio 0.8 SL602 Short 1.7 zoom, throw ratio 1.2 to 2.0 LL603 Long 2.0 zoom, throw ratio 1.9 to 3.9 UL604 Long 1.8 zoom, throw ratio 3.9 to 7.4

Five (5) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 1 year Peace-of-Mind Loaner Program.

# 5YR