

8955H-RJ

ImagePro 8955H-RJ Portable LCD Projector



The ImagePro 8955H-RJ is a Network able (LAN), easy-to-install portable LCD projector ideal for classroom or conference room.

8955H-RJ FEATURES

- 4000 Lumens Brightness
- XGA Resolution
- Lamp access on top
- High performance (5000 HR) hybrid filter with easy front access
- New 16 Watt audio output
- New Microphone Input
- New 3000/6000 hour lamp
- Built-in Anti-theft security
- Audio "passthrough" permits use of sound system to play CDs on the PC when projector is off
- Network (LAN) Control, Maintenance and security
- 0.5 Watt Power Saving Standby Mode
- PC less presentations
- HDMI Input



NEW FRONT-LOADING HYBRID FILTER GIVES 5000 HOURS OF PROJECTOR PERFORMANCE

THE ALL NEW
DUKANE
Education. Presentation. Inspiration.



Convey by Dukane delivers control of classroom audio visual assets in sync with our Convey AClick Student Response System. Experience tomorrow's classroom today with Convey. Visit www.conveyclassrooms.com.


Call Dukane: 866.280.4298

Toll-free: 866-280-4298 • Web: www.dukane.com/av
Fax: 630-584-5156 • E-mail: avsales@dukane.com

ImagePro 8955H-RJ Portable LCD projector

Back Panel

Connections

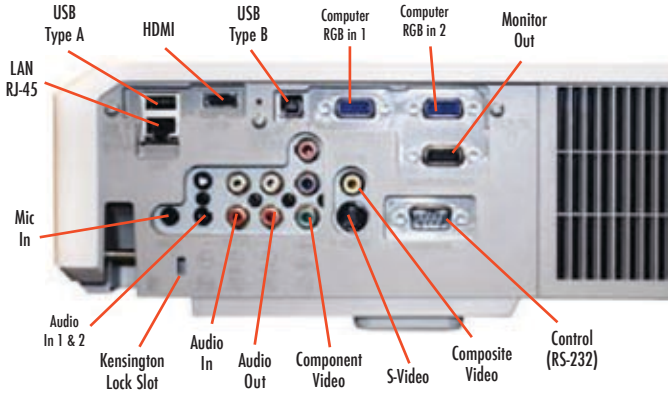

Key features:

- XGA (1024 x 768) resolution
- 4000 ANSI lumens of brightness
- HDMI input
- Easy maintenance in ceiling mount with lamp access on top & 5000 hour filter with front access
- Monitor loophrough & remote mouse control
- Microphone Input with amplifier
- PC less operation vis USB memory device
- 2000:1 Contrast
- Audio passthrough for sound when projector is off
- 16 Watt audio output
- 3000/6000 hour lamp life
- Lock slot, security bar and transition detector
- Five Year Warranty and One Year Peace of Mind Service

8955H-RJ Projection Table

Image Size 4:3		Throw Distance	
Diagonal	Width	Min.	Max.
Inches	Inches	Feet	Feet
30	24	2.8	3.4
60	48	5.8	7.0
80	64	7.8	9.3
100	80	9.8	11.7
120	96	11.7	14.1
150	120	14.7	17.6
200	160	19.5	23.5
300	240	29.3	35.3

Throw Ratio (distance to width) 1.46 to 1.75

THE ALL NEW
DUKANE
Education. Presentation. Inspiration.

Audio Visual Products
2900 Dukane Drive
St. Charles, Illinois 60174
Toll-free: 866.280.4298
Fax: 630-584-5156
E-mail: avsales@dukane.com
Web: www.dukane.com/av



ImagePro is a registered trademark of Dukane Corporation

#10-00018-00

Specifications

Image Element	0.63" polysilicon active-matrix TFT x3
Brightness	4000 ANSI lumens (3400 lumens in Eco Mode)
Resolution	1024 x 768 pixels (H X V), XGA
Contrast	2,000 : 1 Active iris
Scanning Frequency	fh 15 -106 kHz, fv 50-120 Hz
Lens	Manual zoom (F2.3 - 2.5), 1.2X
Lens Throw Ratio	1.46 - 1.75:1 throw distance to image width
Keystone Correction	Digital, vertical +/-30 deg
Aspect Ratio	4:3, 16:9 selectable
Computer	SVGA, VGA, XGA, SXGA, UXGA
Compatibility	MAC13" and MAC16"
Video Compatibility	NTSC, NTSC4.43, PAL, SECAM, PAL-M, PAL-N, Component Video, HDTV (1080i/p, 720p, 576i, 480i/p)
Image Control	Freeze function, electronic magnification and pan
Mouse Control	Using USB
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
PC less presentations	USB-A storage device slot
Lamp	210W UHP
Lamp Life	3000 hours (typical) 6000 hours (Eco mode)
Audio Output	2 speakers 16 watt combined
Throw Distance	34" to 423"
Screen Size, diagonal	30" to 300"
Inputs, Video	(1) Component, RCA x 3 (1) S-video, Mini DIN 4-pin (1) Composite video, RCA x 1
Inputs, Computer	(2) RGB, 15 pin D-sub
Input Digital	(1) HDMI
Inputs, Audio	(2) Stereo mini jack: for PC 1&2 (1) RCA x 2 (for video)
Input from Mic	3.5mm Mini Audio
Outputs, Audio	(1) RCA x 2, adjustable
Outputs, Monitor	RGB, 15 pin D-sub
Outputs, Control	RS-232, 9 pin D-sub USB Type B (Mouse control)
LAN Network Operation	RJ-45
Security	Kensington lock slot & Security Bar
Fan Level	35dB, ultra quiet; 29dB Eco Mode
Closed Caption	CC1, CC2, CC3, CC4, T1,T2,T3,T4
Operating Temperature	41-95 deg F
Power	AC 100-120V, AC 220-240V 50/60 Hz, 330 watt, >1W standby
Size (WxHxD)	12.5" x 3.9" x 11.3"
Weight	7.9 lbs.
Shipping Weight	14 lbs.
Carton Size	15" x 8" x 19"
Accessories Included	Remote control, batteries, power cord, RGB cable, operators manual, CD
Safety	UL/C-UL, FCC Class B
Optional Accessories	Lamp 456-8755J Ceiling Mount, Universal; RPM-U Filter; MU06481

Five (5) year limited warranty on parts and labor in North America, lamp is 90 day warranty (for other locations, local warranties apply).Includes Dukane's FREE 1 year Peace-of-Mind Loaner Program.

Specifications subject to change without notice.

5YR