

9136


ImagePro 9136 Portable LCD Projector



The ImagePro 9136 is a bright (4000 lumens), high SXGA resolution and versatile portable LCD projector with network control, and is HDTV ready

9136 FEATURES

- 4000 lumen brightness
- SXGA resolution (140 X 1050) 16:10
- Network capability RJ-45 for control, maintenance and security
- Easy Lamp access on top and 2000 hour hybrid filter on side
- Horizontal & vertical lens shift
- Optional bayonet style lenses available
- HDTV ready, HDMI input
- Audio pass-through for sound system operation when project is "off"

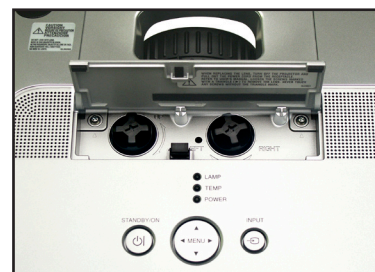

Manual Horizontal and Vertical Lens Shift for Perfect Image Alignment

THE ALL NEW

DUKANE

Education. Presentation. Inspiration.

www.dukcorp.com

 **Convey**
SOLUTIONS
Dukane's Connected Classroom


Convey by Dukane delivers control of classroom audio visual assets in sync with our Student Response System. Experience tomorrow's classroom today with ConVA. Visit www.conveyclassrooms.com.

Call Dukane: 866.280.4298

ImagePro 9136

Portable LCD projector

Back Panel Connections

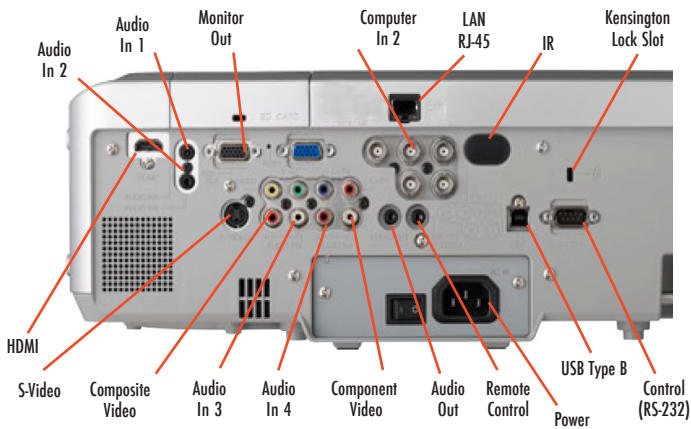

FEATURES

- SXGA (1400 x 1050) resolution
- 4000 ANSI lumens of brightness
- Full 720 display
- Network Capability, RJ-45, connection
- Whiteboard & Blackboard Modes
- Easy lamp access on top & 2000 hour filter access on side
- Monitor loopthrough & remote mouse control
- Optional bayonet style lenses available
- Audio pass-through when projector is off
- Horizontal & vertical lens shift
- Kensington lock slot & security bar
- Five Year Warranty and One Year Peace of Mind Service

9136 Projection Table

Image Size 4:3		Throw Distance	
Diagonal	Width	Min.	Max.
Inches	Inches	Feet	Feet
30	25	3.0	3.7
60	51	6.2	7.5
80	63	8.3	10.0
100	85	10.4	12.6
120	102	12.5	15.1
150	127	15.7	18.9
200	170	21.0	25.3

Throw Ratio (distance to width) 1.5 to 1.8

DUKANE

Dukane Corporation
 Audio Visual Products Division
 2900 Dukane Drive
 St. Charles, Illinois 60174
 800-676-2485
 630-584-5156
 avsales@dukcorp.com
 www.dukcorp.com/av



toll-free
 fax
 e-mail

Specifications

Image Element
 Brightness
 Resolution
 Contrast
 Scanning Frequency
 Lens
 Lens Throw Ratio
 Keystone Correction
 Aspect Ratio
 Computer Compatibility
 Video Compatibility
 Image Control
 Mouse Control
 Projection Modes
 Color Reproduction
 Lamp
 Lamp Life
 Audio
 Throw Distance
 Screen Size, diagonal
 Inputs, Video
 Inputs, Computer
 Outputs Monitor
 Outputs Audio
 Outputs, Control
 Network, Ethernet
 Security
 Fan Level
 Operating Temperature
 Power
 Size (WxHxD)
 Weight
 Carton Size
 Shipping Weight
 Accessories Included
 Safety
 Optional Accessories
 Optional Lenses

9136

0.8" polysilicon TFT x3
 4000 ANSI lumens, 3200 (whisper mode)
 1400 x 1050 pixels (H X V), SXGA
 1000:1 (using active iris)
 fh 15-106 kHz, fv 50-120 Hz
 Manual zoom (F=1.7 to 1.9), 1.2X.
 Horizontal & vertical lens shift, manual
 1.5-1.8 :1 throw distance to image width
 Digital vertical & horizontal +/-40 & +/-20 deg.
 4:3 native, 16:9 selectable
 VGA, SVGA, XGA, SXGA, SXGA+ and UXGA Compressed, MAC13", MAC16"
 NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, SECAM, HDTV 1080i/p, 720p, 576i, 480i/p
 Freeze function, electronic magnification and pan
 Using USB
 Front/rear/ceiling
 24 bit (16.7 million)
 275W UHB
 2000 hours (3000 hours Whisper Mode)
 8W, 2 speakers, WOW Sound
 35" to 436"
 30" to 300"
 (2) Component, RCA x 3, (BNC Shared)
 (1) S-video, Min DIN 4-pin,
 (1) Composite video, RCA x 1
 (2) Audio, Stereo, RCA x 2, (L/R)
 (1) RGB Signal: D-sub, 15 pin,
 (1) RGB, BNC x 5 (shared component)
 (1) HDMI
 (2) Audio, Stereo mini jack
 Stereo Jack, wired remote
 15 pin, D-sub
 Audio, Stereo mini jack x 1
 9 pin D-sub Connector, RS232
 USB type B (remote mouse only)
 RJ-45 port / 100Base-T
 Kensington slot, Security bar
 35dB, (28dB in whisper mode)
 41 to 95 deg. F (5-35 deg C)
 AC 100-120V, AC220-240V
 50/60 Hz, 460 watt
 16.5" x 5.5" x 12.6"
 15.8 lbs.
 21" x 14" x 19"
 25 lbs.
 Remote control, batteries (AA), power cord, RGB cable, operator/safety manual.
 UL60950, C-UL, FCC Part15, Class A, CE
 Lamp 456-8949H, Ceiling mount, universal; RPA-U, Filter; MUO5661
 Short fixed, throw Ratio 0.8
 Short 1.7x zoom, throw ratio 1.2 to 2.0
 Long 2.0x zoom, throw ratio 1.9 to 3.9
 Long 1.8x zoom, throw ratio 3.9 to 7.4

Five (5) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 1 year Peace-of-Mind Loaner Program.

5YR