


105VB

1:5 Composite Video Distribution Amplifier





The Kramer 105VB is a highperformance distribution amplifier for composite video signals. It takes one input, provides correct buffering and isolation and distributes the signal to five identical outputs.

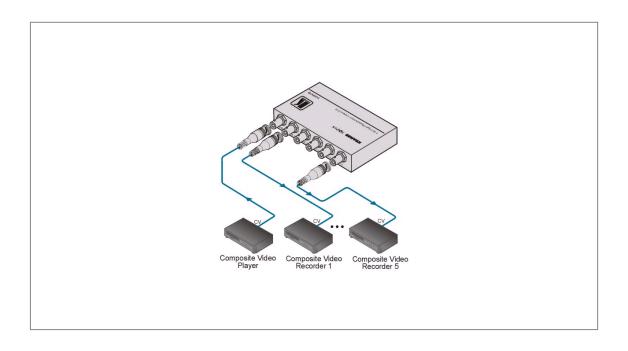



105VB

FEATURES

- Bandwidth 400MHz (-3dB).
- Connectors BNC (105V has RCAs).
- Level (Gain) Control.
- Compact Kramer TOOLSTM3 units can be rack mounted side-by-side in a 1U rack space with the optional RK-3T rack adapter.

TECHNICAL SPECIFICATIONS

INPUT: 1 video, $1Vpp/75\Omega$ on a BNC

connector.

OUTPUTS: 5 video, $1Vpp/75\Omega$ on BNC

connectors.

MAX. VIDEO 2Vpp.

OUTPUT:

VIDEO BANDWIDTH 400MHz.

(-3dB):

DIFF. GAIN: 0.1%.

DIFF. PHASE: 0.1 Deg.

K-FACTOR: <0.05%.

S/N RATIO: 80dB.

CONTROL: Up to +6dB.

COUPLING: AC.

POWER SOURCE: 12V DC, 100mA.

DIMENSIONS: 12cm x 7.5cm x 2.5cm (4.7" x

2.95" x 0.98") W, D, H.

WEIGHT: 0.3kg (0.6lbs) approx.

ACCESSORIES: Power supply, mounting

bracket.

OPTIONS: RK-3T 19" rack adapter.