

VP-222


2x1:2 Computer Graphics Video Switcher







The VP-222 is a highperformance switcher for computer graphics video signals with resolutions ranging from VGA through UXGA and higher. It switches one of two inputs to two identical outputs.

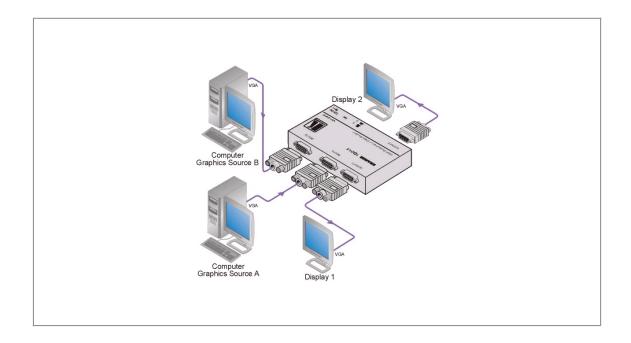



VP-222

FEATURES

- High Bandwidth 365MHz (-3dB).
- HDTV Compatible.
- Compact Kramer TOOLS™3 units can be rack mounted side-by-side in a 1U rack space with the optional RK-3T rack adapter.

TECHNICAL SPECIFICATIONS

INPUT: 2 analog red, green, blue

signals, 0.7Vpp/75 Ω , H & V sync, TTL level, on 15-pin HD

(F) connectors.

OUTPUT: 2 analog red, green, blue

signals, $0.7\text{Vpp}/75\Omega$, H & V syncs, TTL level, on 15-pin HD

(F) connectors.

VIDEO 365MHz.

BANDWIDTH (-

3dB):

NON-LINEARITY: 0.1%.
DIFF. GAIN: 0.06%.
DIFF. PHASE: 0.04Deg.
K-FACTOR: 0.05%.

VIDEO S/N RATIO:

CROSSTALK:

-52dB @5MHz.

76dB.

POWER SOURCE: 12V DC, 120mA.

DIMENSIONS: 12cm x 7.5cm x 2.5cm (4.7" x

2.95" x 0.98") W, D, H.

WEIGHT: 0.25kg (0.55lbs) approx.

ACCESSORIES: Power supply, mounting

bracket.

OPTIONS: RK-3T 19" rack adapter.