



Product Manual

Product Serial:KWO32-66
Version:V1.1-250312
Keewin Display Co.,Ltd.

CONTENTS

1. Cautionary Measures	3
2. Design and Structure	5
3. Outline Dimension (mm)	6
4. Wall Mounted Dimensions (mm)	6
5. Tech Spec	7
6. Installation and Adjustment	8
7. Troubleshooting	10

1. Cautionary Measures


- 1.1 Read these instructions.
- 1.2 Keep these instructions.
- 1.3 Head all warnings.
- 1.4 Follow all instructions.
- 1.5 Please keep the unit upright during transport. Do not turn upside down.
- 1.6 Do not use the units near water, the units shall not be exposed to dripping or splashing.
- 1.7 Do not install or operate the unit near any heat sources such as open flame, radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
- 1.8 If the provided plug does not fit into your outlet, consult an electrician for replacement of the outlet.
- 1.9 Protect the power cable from being pressed by weight.
- 1.10 To protect the unit from damage, please follow user manual guidelines and safely secure the unit on a stable surface/structure.
- 1.11 Please shut off the power supply before opening the unit for testing or maintenance.
- 1.12 Unplug this apparatus during lightning storms or when unused for long periods of time.
- 1.13 Do not use corrosive liquids to clean the unit's surface. Please use non-woven fabric or cotton with a medium-strength cleaning agent.
- 1.14 Any modification to the unit is prohibited. **Keewin Display** is not responsible for any resulting damages.
- 1.15 Only use attachments/accessories specified by the manufacturer.

- 1.16** Do not touch internal components when the unit is powered on. **Keewin Display** is not responsible for any resulting deaths or injuries.
- 1.17** Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
- 1.18** Please dispose electronics properly by strictly following all applicable laws and regulations.

CAUTION

These servicing instructions are for use by qualified service personnel only. To reduce the risk of electric shock, do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so.

2. Design and Structure

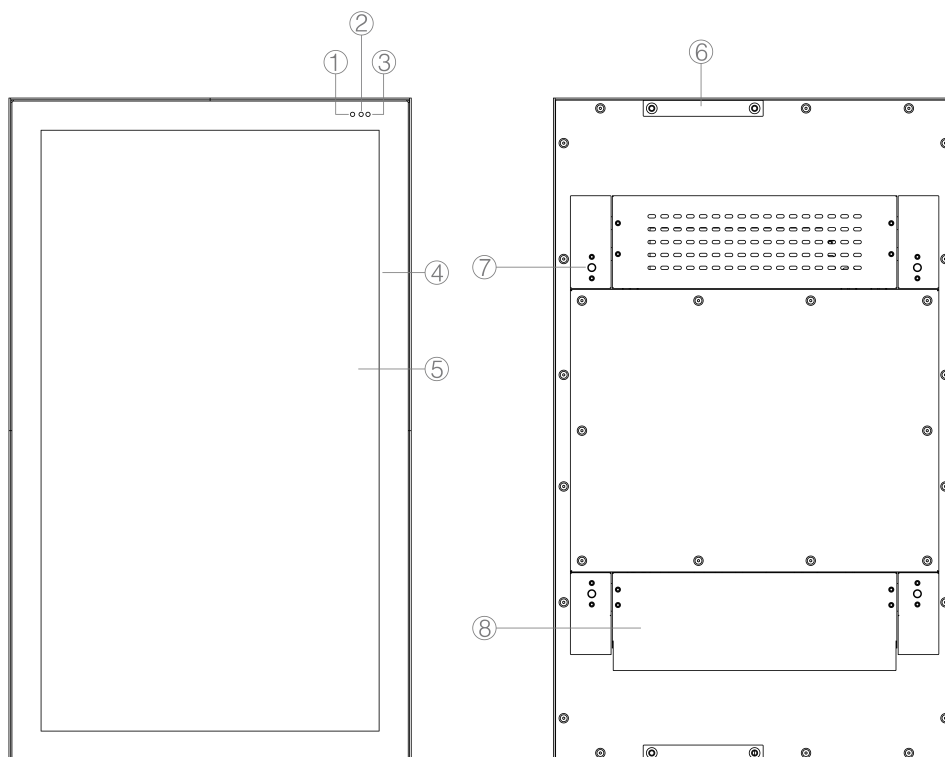

1.Power Indicator

This Indicator lights up green when the display operates normally (on mode).

If the display is in sleep mode (in Power Saving mode), this indicator changes color to red.

2.IR Sensor

This is where the unit receives signals from the remote control.

3.Light Sensor

This is where the unit receives that adjusts its brightness automatically according to changes in ambient light.

4.AG Coating Tempered Glass


5.Display Area

6.Handle


7.Mounting Holes

8.Outlet Port Cover

3. Outline Dimension (mm)

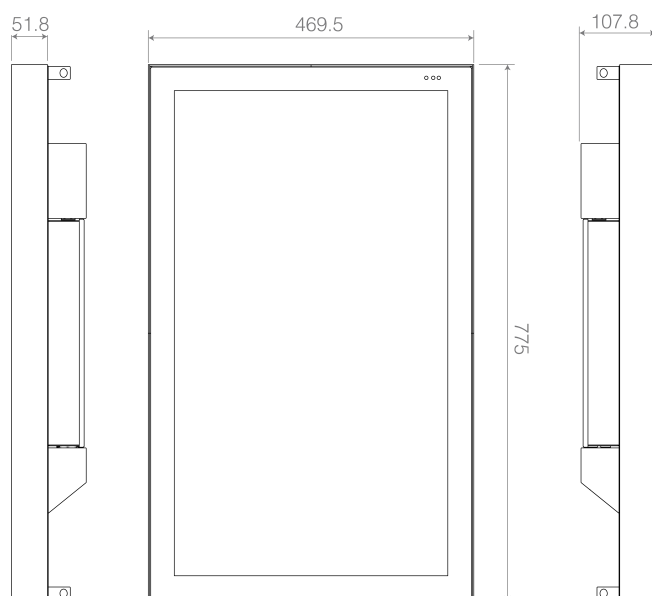

4. Wall Mounted Dimensions (mm)

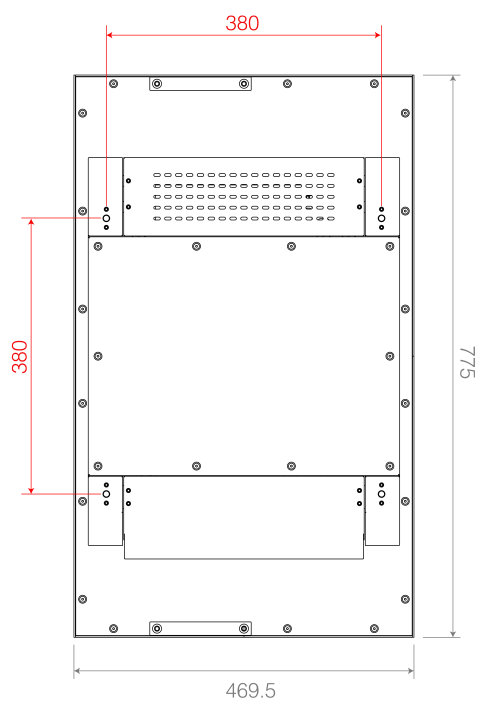

APPLY FOR BOTH HORIZONTALLY AND VERTICALLY





5. Tech Spec

Dimensions	775(H) x 469.5 (W) x 107.8(D) mm
Net weight	18KG
Display Dimensions	32"
Resolution	1920*1080
Brightness	2500nits
Viewing angle	178°
Contrast	1200:1
Cooling system	Heat sink
Video	HDMI
Audio	Dual Channel
OS	N / A
IP	IP 66
Operating Environment	Fully Outdoor
Operating temp.	-30℃ ~ +50℃
Operating Humidity	5% ~ 98%
Operating Altitude	≤ 2000m
Operating Voltage	110~220V±10%, 50Hz/60Hz
Power (maximum)	105W

6. Installation and Adjustment

6.1 Preparation


6.1.1 Packing list

Display Unit	M10 Hex Bolts	HDMI Cable(2m)	Remote Control
			

6.2 Assembly of Power and HDMI cable


6.2.1 Unscrew all the screws in the figure below and remove the cover plate.

Remove four M4 screws

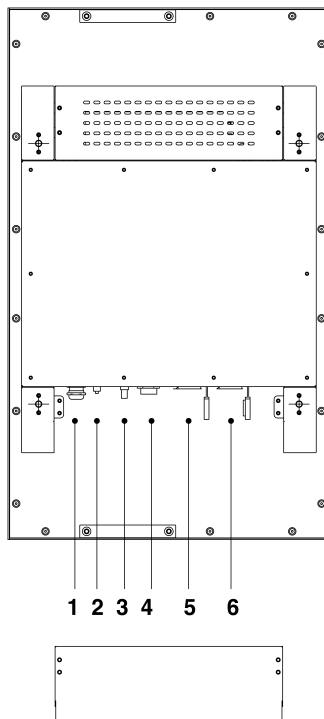


- | | |
|------------------|--|
| 1.Power Cable | 2.Antenna Port (only for android type) |
| 3.Audio Out Port | 4.USB |
| | 5.HDMI Port |
| 6.RJ45 | |

6.2.2 You can link to your own media box by connecting to HDMI in port.

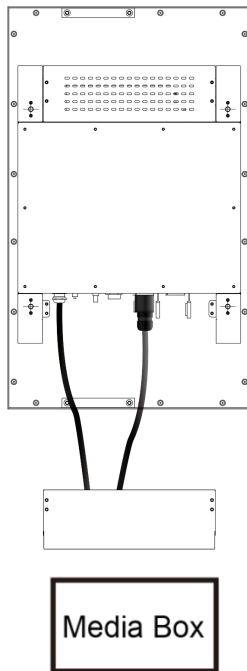

6.2.3 After assembling the power and HDMI cable, restore them according to the above two operations.

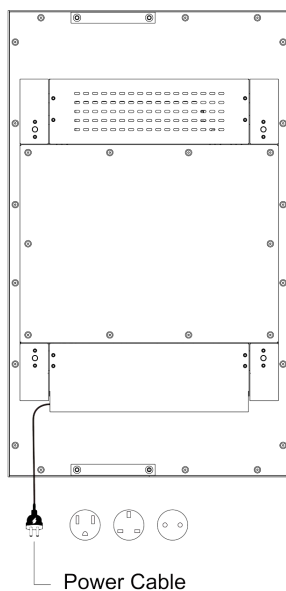

Note: Hold the screw tightly to prevent the cover from leaking.

7. Troubleshooting

If the unit fails or the performance changes dramatically, check the unit in accordance with the following instructions. Remember to check the peripherals to pinpoint the source of the failure.

Symptom	Solution
Power cannot be turned on. (Power indicator does not light.)	<ul style="list-style-type: none"> ● Check both ends of the power cable are plugged into the socket appropriately and the socket is operational.
No Input Signal message appears.	<ul style="list-style-type: none"> ● Check the signal cable is connected properly ● Check the power of the relevant peripherals is turned on. ● Check the Input option that has been selected matches with the input signal.
The remote control does not function properly.	<ul style="list-style-type: none"> ● Check the batteries are not drained. (Use new batteries.) ● Check the remote control is within the operating range. ● Check the remote control is pointed to the remote control window in the display. ● Check there are no obstacles between the remote control and the remote control window.
Flashing spots or stripes appear on the screen.	<ul style="list-style-type: none"> ● Check there are no emission (Car, HV cable or Neon lamp) or other possible interference sources.
Image color or quality deteriorates.	<ul style="list-style-type: none"> ● Check all the video settings are adjusted appropriately, such as brightness, contrast, color etc.
Screen position and size are incorrect.	<ul style="list-style-type: none"> ● Check the screen position and size is adjusted appropriately.

Please do not hesitate to contact our customer support department if you encounter any difficulties. Our engineers will be in touch with you in no time.

Address: Suite 1105, No.22, Lane 118, Zhong Jiang Road , Hai Liang Plaza,
Shanghai, 200062, China

Tel: 86-021-54049988